

TRC-190シリーズ

19インチラックマウントシャーシ型メディアコンバータ



機能とメリット

- ラックマウント使用向けの 19 インチシャーシ
- 高密度アプリケーション用の 19 スロット
- 冗長デュアル電源入力に対応
- ファンレスシャーシ設計がサービスコストを削減

認証



製品紹介

TRC-190ラックマウントシャーシは、CSM-200シリーズのイーサネット - ファイバモジュールとTCF-142-RMシリーズのシリアル - ファイバモジュールのメディアコンバータモジュール用に19個のスロットを提供します。TRC-190シャーシにはACまたはDC電源入力が入1つ付属しており、信頼性を高めるためにオプションの冗長電源拡張ACまたはDCモジュールを利用できます。PWR-190-ACおよびPWR-190-DC-48電源モジュールは同時に取り付けることができます。

仕様

Power Parameters	
Input Voltage	TRC-190-AC: 110 to 240 VAC TRC-190-DC-48: 36 to 53 VDC Redundant dual inputs
No. of Power Inputs	2
Overload Current Protection	Supported
Power Consumption	TRC-190-AC: 0.9 A @ 110 VAC TRC-190-DC-48: 2.1 A @ 48 VDC
Physical Characteristics	
Dimensions	440 x 260 x 88 mm (17.32 x 10.24 x 3.46 in)
Installation	19-inch rack mounting
IP Rating	IP30
Weight	5200 g (11.4 lb)
Environmental Limits	
Ambient Relative Humidity	5 to 95% (non-condensing)
Operating Temperature	0 to 60°C (32 to 140°F)
Storage Temperature (package included)	-20 to 75°C (-4 to 167°F)

Standards and Certifications

EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF
Environmental Testing	IEC 60068-2-1 IEC 60068-2-2 IEC 60068-2-3
Safety	EN 60950-1, IEC 60950-1
Vibration	IEC 60068-2-6

MTBF


Time	1,055,112 hrs
Standards	Telcordia (Bellcore), GB

Warranty

Warranty Period	5 years
Details	See www.moxa.com/jp/warranty

Package Contents

Device	1 x TRC-190 Series converter
Bracket	18 x faceplate and screws
Power Supply	1 x power cord
Documentation	1 x quick installation guide 1 x warranty card
Note	This product requires additional modules (sold separately) to function.

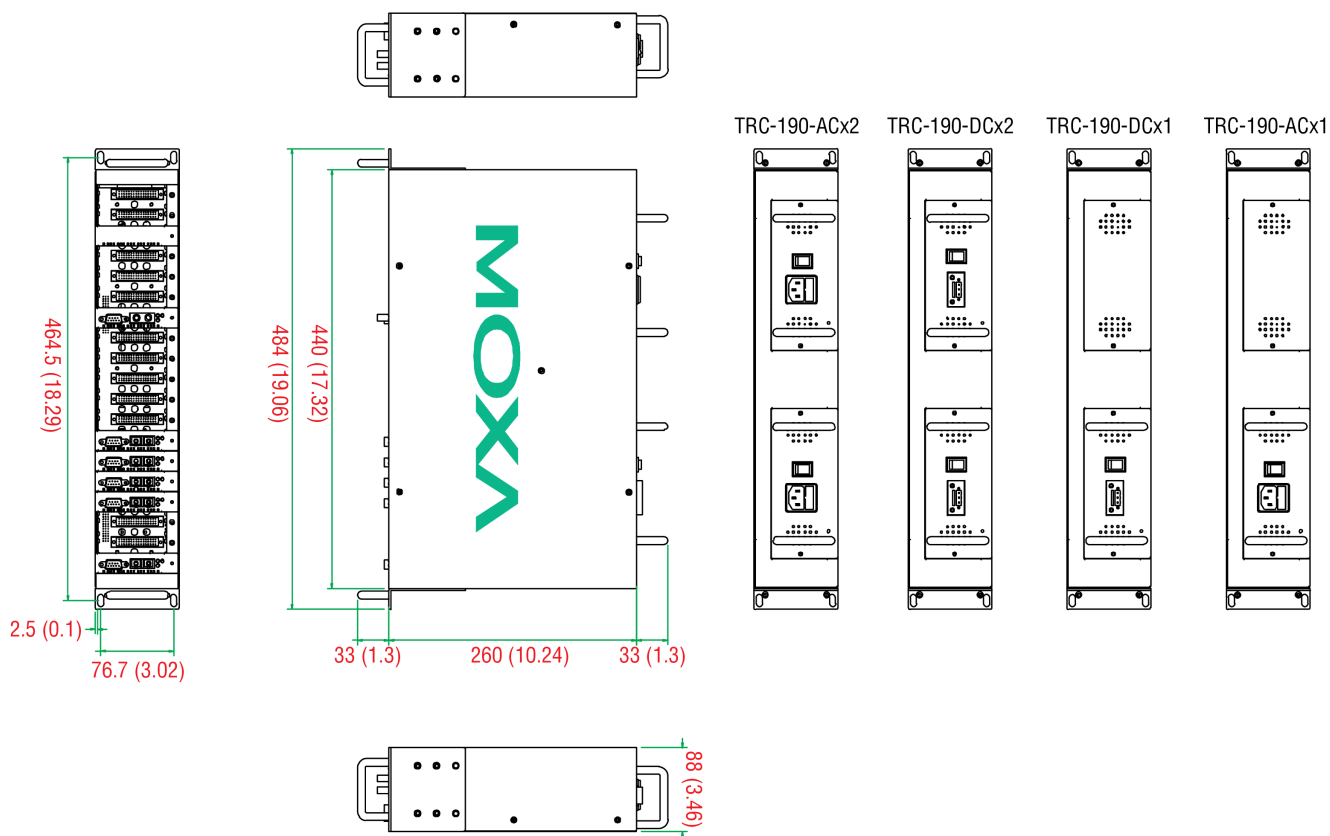

CSM-400-1214	10/100BaseT(X) to 100BaseFX slide-in management module converter, multi-mode SC connector, -20 to 55°C
CSM-400-1214-T	10/100BaseT(X) to 100BaseFX slide-in management module converter, multi-mode SC connector, -40 to 75°C
CSM-400-1218	10/100BaseT(X) to 100BaseFX slide-in management module converter, single-mode SC connector, -20 to 55°C
CSM-400-1218-T	10/100BaseT(X) to 100BaseFX slide-in management module converter, single-mode SC connector, -40 to 75°C
CSM-400-1224	10/100BaseT(X) to 100BaseFX slide-in management module converter, WDM-A single-mode SC connector, -20 to 55°C
CSM-400-1224-T	10/100BaseT(X) to 100BaseFX slide-in management module converter, WDM-A single-mode SC connector, -40 to 75°C
CSM-400-1225	10/100BaseT(X) to 100BaseFX slide-in management module converter, WDM-B single-mode SC connector, -20 to 55°C
CSM-400-1225-T	10/100BaseT(X) to 100BaseFX slide-in management module converter, WDM-B single-mode SC connector, -40 to 75°C

Power Cords

PWC-C13AU-3B-183	Power cord with Australian (AU) plug, 1.83 m
PWC-C13CN-3B-183	Power cord with three-prong China (CN) plug, 1.83 m
PWC-C13EU-3B-183	Power cord with Continental Europe (EU) plug, 1.83 m
PWC-C13JP-3B-183	Power cord with Japan (JP) plug, 7A/125V, 1.83 m
PWC-C13UK-3B-183	Power cord with United Kingdom (UK) plug, 1.83 m
PWC-C13US-3B-183	Power cord with United States (US) plug, 1.83 m

Power Supplies

PWR-190-AC	110 to 240 VAC power supply for the TRC-190-AC
PWR-190-DC-48	36 to 53 VDC power supply for the TRC-190-DC-48

© Moxa Inc. All rights reserved. 2019年1月18日更新。

Moxa Inc.の明白な許可を書面で取得しない限り、本書およびその一部の複製や使用はいかなる方法やいかなる場合でも許可されません。製品の仕様は予告なく変更されることがあります。最新の製品情報については当社のWebサイトをご覧ください。