

SFP-1G 系列

1 埠 Gigabit 乙太網路 SFP 模組



特色與優點

- 數位診斷監控功能
- -40 至 85°C 操作溫度範圍 (T 型號)
- 符合 IEEE 802.3z 標準
- 差異化 LVPECL 輸入與輸出
- TTL 訊號偵測指示燈
- 可熱插拔的 LC 雙工連接器
- 符合 Class 1 laser 產品 EN 60825-1 標準

認證



簡介

SFP-1G 系列 1 埠 Gigabit 乙太網路 SFP 模組可作為部分 Moxa 乙太網路交換器的選配配件。

Ethernet Interface

Ports	1																																																																																																																																																																																																			
Connectors	Duplex LC connector Simplex LC connector (WDM-type only)																																																																																																																																																																																																			
Optical Fiber	<table><thead><tr><th colspan="2" rowspan="2"></th><th colspan="6">Gigabit Ethernet SFP</th></tr><tr><th colspan="2">SFP-SX</th><th colspan="2">SFP-LSX</th><th>SFP-LX</th><th>SFP-LH</th></tr></thead><tbody><tr><td colspan="2">Transceiver Type</td><td colspan="2">Multi-Mode</td><td colspan="2">Multi-Mode</td><td>Single-mode</td><td>Single-mode</td></tr><tr><td colspan="2">Fiber Cable Type</td><td>O-M1</td><td>O-M2</td><td>O-M2</td><td>O-M1</td><td>G.652</td><td>G.652</td></tr><tr><td colspan="2">Typical Distance</td><td>300 m</td><td>550 m</td><td>1 km</td><td>2 km</td><td>10 km</td><td>30 km</td></tr><tr><td rowspan="3">Wavelength</td><td>Typical (nm)</td><td colspan="2">850</td><td colspan="2">1310</td><td>1310</td><td>1310</td></tr><tr><td>TX Range (nm)</td><td colspan="2">830 to 860</td><td colspan="2">1270 to 1355</td><td>1280 to 1355</td><td>1280 to 1355</td></tr><tr><td>RX Range (nm)</td><td colspan="2">770 to 860</td><td colspan="2">1260 to 1610</td><td>1260 to 1610</td><td>1260 to 1610</td></tr><tr><td rowspan="4">Optical Power</td><td>TX Range (dBm)</td><td colspan="2">-4 to -9.5</td><td colspan="2">-1 to -9</td><td>-3 to -9</td><td>-3 to -8</td></tr><tr><td>RX Range (dBm)</td><td colspan="2">0 to -18</td><td colspan="2">-1 to -19</td><td>-3 to -21</td><td>-3 to -23</td></tr><tr><td>Link Budget (dB)</td><td colspan="2">8.5</td><td colspan="2">10</td><td>12</td><td>15</td></tr><tr><td>Dispersion Penalty (dB)</td><td>4.3</td><td>3.6</td><td>5</td><td>5</td><td>1</td><td>1</td></tr><tr><td colspan="8">Note: When connecting the SFP-LHX, ZX, EZX, or EZX-120, we recommend using an attenuator to prevent the transceiver from being damaged by excessive optical power.</td></tr><tr><td colspan="2" rowspan="2"></td><th colspan="6">Gigabit Ethernet SFP</th></tr><tr><th>SFP-LHX</th><th>SFP-ZX</th><th>SFP-EZX</th><th>SFP-EZX-120</th></tr><tr><td colspan="2">Transceiver Type</td><td>Single-mode</td><td>Single-mode</td><td>Single-mode</td><td>Single-mode</td></tr><tr><td colspan="2">Fiber Cable Type</td><td>G.652</td><td>G.652</td><td>G.652</td><td>G.652</td></tr><tr><td colspan="2">Typical Distance</td><td>40 km</td><td>80 km</td><td>110 km</td><td>120 km</td></tr><tr><td rowspan="3">Wavelength</td><td>Typical (nm)</td><td>1310</td><td>1550</td><td>1550</td><td>1550</td></tr><tr><td>TX Range (nm)</td><td>1280 to 1340</td><td>1530 to 1570</td><td>1530 to 1570</td><td>1530 to 1570</td></tr><tr><td>RX Range (nm)</td><td>1260 to 1610</td><td>1260 to 1610</td><td>1260 to 1610</td><td>1100 to 1600</td></tr><tr><td rowspan="4">Optical Power</td><td>TX Range (dBm)</td><td>+3 to -4</td><td>+5 to 0</td><td>+5 to 0</td><td>+3 to -2</td></tr><tr><td>RX Range (dBm)</td><td>-1 to -24</td><td>-1 to -24</td><td>-9 to -30</td><td>-8 to -33</td></tr><tr><td>Link Budget (dB)</td><td>20</td><td>24</td><td>30</td><td>31</td></tr><tr><td>Dispersion Penalty (dB)</td><td>1</td><td>1</td><td>1</td><td>2</td></tr><tr><td colspan="6">Note: When connecting the SFP-LHX, ZX, EZX, or EZX-120, we recommend using an attenuator to prevent the transceiver from being damaged by excessive optical power.</td></tr><tr><td colspan="2" rowspan="2"></td><th colspan="4">WDM Gigabit Ethernet SFP</th></tr><tr><th>SFP-10A</th><th>SFP-10B</th><th>SFP-20A</th><th>SFP-20B</th></tr><tr><td colspan="2">Transceiver Type</td><td colspan="2">Single-mode</td><td colspan="2">Single-mode</td></tr></tbody></table>												Gigabit Ethernet SFP						SFP-SX		SFP-LSX		SFP-LX	SFP-LH	Transceiver Type		Multi-Mode		Multi-Mode		Single-mode	Single-mode	Fiber Cable Type		O-M1	O-M2	O-M2	O-M1	G.652	G.652	Typical Distance		300 m	550 m	1 km	2 km	10 km	30 km	Wavelength	Typical (nm)	850		1310		1310	1310	TX Range (nm)	830 to 860		1270 to 1355		1280 to 1355	1280 to 1355	RX Range (nm)	770 to 860		1260 to 1610		1260 to 1610	1260 to 1610	Optical Power	TX Range (dBm)	-4 to -9.5		-1 to -9		-3 to -9	-3 to -8	RX Range (dBm)	0 to -18		-1 to -19		-3 to -21	-3 to -23	Link Budget (dB)	8.5		10		12	15	Dispersion Penalty (dB)	4.3	3.6	5	5	1	1	Note: When connecting the SFP-LHX, ZX, EZX, or EZX-120, we recommend using an attenuator to prevent the transceiver from being damaged by excessive optical power.										Gigabit Ethernet SFP						SFP-LHX	SFP-ZX	SFP-EZX	SFP-EZX-120	Transceiver Type		Single-mode	Single-mode	Single-mode	Single-mode	Fiber Cable Type		G.652	G.652	G.652	G.652	Typical Distance		40 km	80 km	110 km	120 km	Wavelength	Typical (nm)	1310	1550	1550	1550	TX Range (nm)	1280 to 1340	1530 to 1570	1530 to 1570	1530 to 1570	RX Range (nm)	1260 to 1610	1260 to 1610	1260 to 1610	1100 to 1600	Optical Power	TX Range (dBm)	+3 to -4	+5 to 0	+5 to 0	+3 to -2	RX Range (dBm)	-1 to -24	-1 to -24	-9 to -30	-8 to -33	Link Budget (dB)	20	24	30	31	Dispersion Penalty (dB)	1	1	1	2	Note: When connecting the SFP-LHX, ZX, EZX, or EZX-120, we recommend using an attenuator to prevent the transceiver from being damaged by excessive optical power.								WDM Gigabit Ethernet SFP				SFP-10A	SFP-10B	SFP-20A	SFP-20B	Transceiver Type		Single-mode		Single-mode	
		Gigabit Ethernet SFP																																																																																																																																																																																																		
		SFP-SX		SFP-LSX		SFP-LX	SFP-LH																																																																																																																																																																																													
Transceiver Type		Multi-Mode		Multi-Mode		Single-mode	Single-mode																																																																																																																																																																																													
Fiber Cable Type		O-M1	O-M2	O-M2	O-M1	G.652	G.652																																																																																																																																																																																													
Typical Distance		300 m	550 m	1 km	2 km	10 km	30 km																																																																																																																																																																																													
Wavelength	Typical (nm)	850		1310		1310	1310																																																																																																																																																																																													
	TX Range (nm)	830 to 860		1270 to 1355		1280 to 1355	1280 to 1355																																																																																																																																																																																													
	RX Range (nm)	770 to 860		1260 to 1610		1260 to 1610	1260 to 1610																																																																																																																																																																																													
Optical Power	TX Range (dBm)	-4 to -9.5		-1 to -9		-3 to -9	-3 to -8																																																																																																																																																																																													
	RX Range (dBm)	0 to -18		-1 to -19		-3 to -21	-3 to -23																																																																																																																																																																																													
	Link Budget (dB)	8.5		10		12	15																																																																																																																																																																																													
	Dispersion Penalty (dB)	4.3	3.6	5	5	1	1																																																																																																																																																																																													
Note: When connecting the SFP-LHX, ZX, EZX, or EZX-120, we recommend using an attenuator to prevent the transceiver from being damaged by excessive optical power.																																																																																																																																																																																																				
		Gigabit Ethernet SFP																																																																																																																																																																																																		
		SFP-LHX	SFP-ZX	SFP-EZX	SFP-EZX-120																																																																																																																																																																																															
Transceiver Type		Single-mode	Single-mode	Single-mode	Single-mode																																																																																																																																																																																															
Fiber Cable Type		G.652	G.652	G.652	G.652																																																																																																																																																																																															
Typical Distance		40 km	80 km	110 km	120 km																																																																																																																																																																																															
Wavelength	Typical (nm)	1310	1550	1550	1550																																																																																																																																																																																															
	TX Range (nm)	1280 to 1340	1530 to 1570	1530 to 1570	1530 to 1570																																																																																																																																																																																															
	RX Range (nm)	1260 to 1610	1260 to 1610	1260 to 1610	1100 to 1600																																																																																																																																																																																															
Optical Power	TX Range (dBm)	+3 to -4	+5 to 0	+5 to 0	+3 to -2																																																																																																																																																																																															
	RX Range (dBm)	-1 to -24	-1 to -24	-9 to -30	-8 to -33																																																																																																																																																																																															
	Link Budget (dB)	20	24	30	31																																																																																																																																																																																															
	Dispersion Penalty (dB)	1	1	1	2																																																																																																																																																																																															
Note: When connecting the SFP-LHX, ZX, EZX, or EZX-120, we recommend using an attenuator to prevent the transceiver from being damaged by excessive optical power.																																																																																																																																																																																																				
		WDM Gigabit Ethernet SFP																																																																																																																																																																																																		
		SFP-10A	SFP-10B	SFP-20A	SFP-20B																																																																																																																																																																																															
Transceiver Type		Single-mode		Single-mode																																																																																																																																																																																																

		WDM Gigabit Ethernet SFP			
		SFP-10A	SFP-10B	SFP-20A	SFP-20B
Fiber Cable Type		G.652		G.652	
Typical Distance		10 km		20 km	
Wavelength	Typical (nm)	TX 1310, RX 1550	TX 1550, RX 1310	TX 1310, RX 1550	TX 1550, RX 1310
	TX Range (nm)	1270 to 1355	1530 to 1570	1270 to 1355	1530 to 1570
	RX Range (nm)	1480 to 1580	1260 to 1360	1480 to 1580	1260 to 1360
Optical Power	TX Range (dBm)	-3 to -9		-2 to -8	
	RX Range (dBm)	-3 to -21		-2 to -23	
	Link Budget (dB)	12		15	
	Dispersion Penalty (dB)	2		3	

Note: WDM-type SFP modules must be used in pairs (e.g., SFP-1G10ALC and SFP-1G10BLC).

Note: When connecting the SFP-40A and 40B, we recommend using an attenuator to prevent damage caused by excessive optical power.

		WDM Gigabit Ethernet SFP	
		SFP-40A	SFP-40B
Transceiver Type		Single-mode	
Fiber Cable Type		G.652	
Typical Distance		40 km	
Wavelength	Typical (nm)	TX 1310, RX 1550	TX 1550, RX 1310
	TX Range (nm)	1290 to 1330	1530 to 1570
	RX Range (nm)	1480 to 1580	1260 to 1360
Optical Power	TX Range (dBm)	+2 to -3	
	RX Range (dBm)	-1 to -23	
	Link Budget (dB)	20	
	Dispersion Penalty (dB)	1	

Note: WDM-type SFP modules must be used in pairs (e.g., SFP-1G10ALC and SFP-1G10BLC).

Note: When connecting the SFP-40A and 40B, we recommend using an attenuator to prevent damage caused by excessive optical power.

Typical Distance: To reach the typical distance of specified fiber transceiver, please refer to formula: Link budget(dB) > dispersion penalty(dB) + total link loss(dB)

Power Parameters

Power Consumption	Max. 1 W
-------------------	----------

Environmental Limits

Operating Temperature	Standard Models: 0 to 60°C (32 to 176°F) Wide Temp. Models: -40 to 85°C (-40 to 185°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

Safety	CE, FCC, TÜV (EN 60825), UL 60950-1
Maritime	DNV-GL

Warranty

Warranty Period	5 years
Details	See www.moxa.com/tw/warranty


Package Contents

Device	1 x SFP-1G Series module
Documentation	1 x warranty card

尺寸


SFP-1G 系列

單位：公釐（英吋）

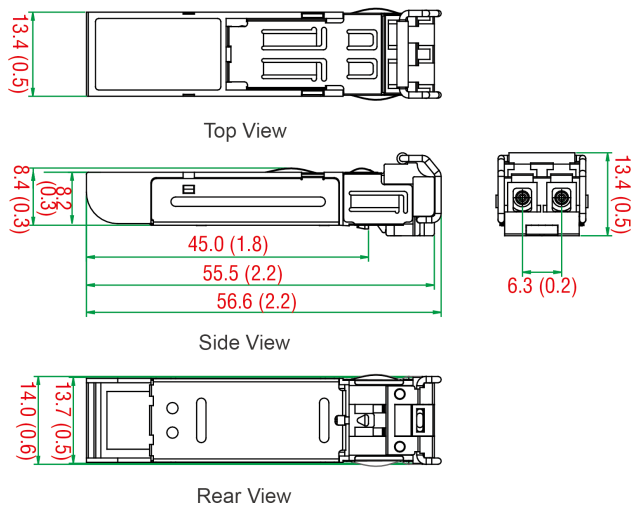

SFP-1G 系列 (WDM 型)

單位：公釐（英吋）

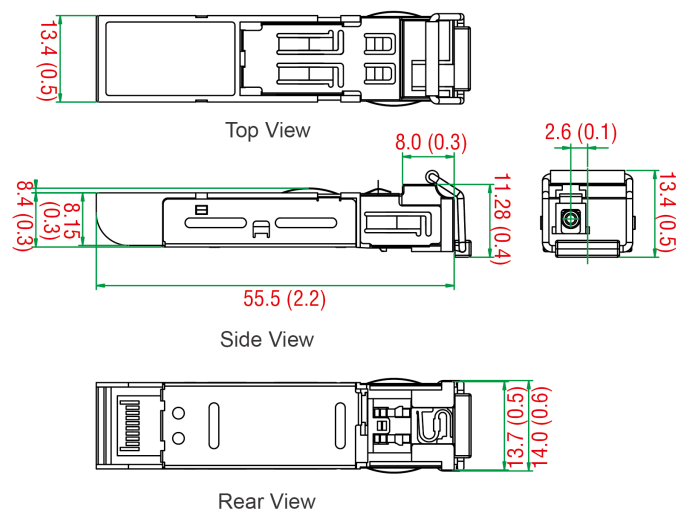

訂購資訊

Model Name	Transceiver Type	Typical Distance	Operating Temp.
SFP-1GSXLC	Multi-mode	300 m/550 m	0 to 60°C
SFP-1GSXLC-T	Multi-mode	300 m/550 m	-40 to 85°C
SFP-1GLSXLC	Multi-mode	1 km/2 km	0 to 60°C
SFP-1GLSXLC-T	Multi-mode	1 km/2 km	-40 to 85°C
SFP-1G10ALC	Single-mode	10 km	0 to 60°C
SFP-1G10ALC-T	Single-mode	10 km	-40 to 85°C
SFP-1G10BLC	Single-mode	10 km	0 to 60°C
SFP-1G10BLC-T	Single-mode	10 km	-40 to 85°C
SFP-1GLXLC	Single-mode	10 km	0 to 60°C
SFP-1GLXLC-T	Single-mode	10 km	-40 to 85°C
SFP-1G20ALC	Single-mode	20 km	0 to 60°C
SFP-1G20ALC-T	Single-mode	20 km	-40 to 85°C

Model Name	Transceiver Type	Typical Distance	Operating Temp.
SFP-1G20BLC	Single-mode	20 km	0 to 60°C
SFP-1G20BLC-T	Single-mode	20 km	-40 to 85°C
SFP-1GLHLC	Single-mode	30 km	0 to 60°C
SFP-1GLHLC-T	Single-mode	30 km	-40 to 85°C
SFP-1G40ALC	Single-mode	40 km	0 to 60°C
SFP-1G40ALC-T	Single-mode	40 km	-40 to 85°C
SFP-1G40BLC	Single-mode	40 km	0 to 60°C
SFP-1G40BLC-T	Single-mode	40 km	-40 to 85°C
SFP-1GLHLC	Single-mode	40 km	0 to 60°C
SFP-1GLHLC-T	Single-mode	40 km	-40 to 85°C
SFP-1GZXLC	Single-mode	80 km	0 to 60°C
SFP-1GZXLC-T	Single-mode	80 km	-40 to 85°C
SFP-1GEZLC	Single-mode	110 km	0 to 60°C
SFP-1GEZLC-120	Single-mode	120 km	0 to 60°C

© Moxa Inc. 版權所有.2019 年 1 月 09 日更新。

未經 Moxa Inc. 明確書面許可，不得以任何方式複製或使用本文件及其任何部分。產品規格如有變更，恕不另行通知。請至本公司官網了解最新的產品資訊。