

RKS-G4030-PLシリーズ


6 10GbE、8 2.5GbE、16モジュール型1GbEポート（802.3bt PoEオプション）レイヤ2モジュール型マネージドイーサネットスイッチ



機能とメリット

- ・ファストイーサネットから10GbE産業用ネットワークまで、最大30ポートをサポートするスケーラブル設計
- ・LAN/電源モジュールを備えたモジュール型インターフェースによる柔軟な拡張
- ・高出力デバイス向けにポートあたり最大90 W、総電力720 WのIEEE 802.3bt PoE
- ・IEC 61850-3およびIEEE 1613に準拠した高いEMC耐性
- ・ハードウェアベースのIEEE 1588 PTPで高精度な時刻同期を実現
- ・内蔵温度検知によるインテリジェントシャーシ監視
- ・Turbo RingとTurbo Chain（リカバリ時間はスイッチ250台で20 ms未満）¹、およびSTP/RSTP/MSTPによりネットワークの冗長性を実現
- ・MXView Oneシリーズをサポートし、簡単に視覚的な産業用ネットワーク管理を実現
- ・GOOSEチェックによる簡単なトラブルシューティング
- ・電力SCADA向けIEC 61850-90-4スイッチデータモデリングに基づく内蔵MMSサーバー
- ・IEC 62443-4-2セキュリティレベル2認証を取得
- ・動作温度範囲-40～75°C

認証



製品紹介

RKS-G4030-PLシリーズは、変電所オートメーション、鉄道運行、高度道路交通システムなど、ミッションクリティカルな産業およびビジネスアプリケーションにおいて、卓越した信頼性とパフォーマンスを提供するために特別に設計されています。

高密度10GbEバックボーン（最大6の固定10G SFP+ポート）、モジュール型LAN拡張（最大16の追加ギガビットポート）、およびデュアル絶縁冗長電源オプション（12/24/48 VDC、110/220 VAC/VDC）により、RKS-G4030-PL シリーズは、配線およびメンテナンスコストを削減しながら、堅牢な通信を保証します。

さらに、両面電源設置設計（前面または背面）により、多様なキャビネットレイアウトに合わせた設置の利便性を最大化します。

1. ポートリンク速度が1ギガビット以上の場合、リカバリ時間は50 ms未満となります。

その他の機能とメリット

- IEEE 1588v2 PTP（Precision Time Protocol：高精度時刻同期プロトコル）によるネットワーク時刻同期
- 主なマネージド機能を迅速に設定するコマンドラインインターフェース
- マルチキャストトラフィックをフィルタリングするIGMPスヌーピングおよびGMRP
- ポートベースのVLAN、IEEE 802.1Q VLAN、GVRPでネットワークプランニングを簡素化
- QoS（IEEE 802.1p/1Q and TOS/DiffServ）
- 最適な帯域幅利用のIEEE 802.3ad、LACP
- ラインスワップ高速リカバリ
- TACACS+、IEEE 802.1X、SNMPv3、HTTPS、およびSSHにより、ネットワークセキュリティを強化
- 異なるレベルのネットワーク管理を実現するSNMPv1/v2c/v3
- プロアクティブで効率の高いネットワーク監視のためのRMON
- 帯域幅管理により、許可されたMACアドレスへのアクセスを制限する「ポートのロック」で、予期しないネットワークアクセスを防止
- オンラインデバッグ用のポートミラーリング
- メールとリレー出力を通じた例外検出による自動警告
- 接続されたデバイスのIPアドレスの自動復旧
- Webブラウザ、Telnet/シリアルコンソール、CLI、Windowsユーティリティ、ABC-02またはABC-03自動バックアップコンフィギュレーションによる設定が可能
- アウトオブバンド管理（OOBM）ポートにより、インバンドサービスが利用できない場合でもネットワーク管理を実現

仕様

Ethernet Interface	
1000/2500/10000BaseSFP Ports	RKS-G4030-PL models: 6
10/100/1000/2500BaseT(X) Ports (RJ45 connector)	RKS-G4030-PL models: 8 RKS-G4030-PL-PoE models: 8
Out-of-band Management (OOBM)	1 x 8-pin RJ45 1GbE Ethernet port (MGMT)
Expansion Module Slots	There are 2 module slots on the switch. Users can select different types of modules to insert into the switch. The modules that can be selected include 8-port modules with 10/100/1000BaseT(X), 10/100/1000BaseT(X) PoE, and 100/1000BaseSFP interfaces. Refer to Expansion Modules in the Accessories section for a full list of supported interface modules. 8-port module slots: 2 (Up to 16 total ports) Module Options: 8-port 10/100/1000BaseT(X) 8-port 10/100/1000BaseT(X) PoE (PoE models only) 8-port 100/1000BaseSFP
Standards	IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1Q for VLAN Tagging IEEE 802.1s for Multiple Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1X for authentication IEEE 802.3 for 10BaseT IEEE 802.3ab for 1000BaseT(X) IEEE 802.3ad for Port Trunk with LACP IEEE 802.3ae for 10 Gigabit Ethernet IEEE 802.3bz for 2.5GBaseX IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for flow control IEEE 802.3z for 1000BaseSX/LX/LHX/ZX
Note	All Ethernet ports on the RKS-G4030-PL series operate in full-duplex mode exclusively. Half-duplex transmission is not supported.

Ethernet Software Features

Management	- ARP - Back Pressure Flow Control - DHCP Relay Agent (Option 82) - DHCP Server/Client - Fiber check - Flow control - HTTP - HTTPS - IPv4 - Linkup Delay - LLDP - Port Mirroring (SPAN, RSPAN) - Private MIB - RARP - RMON - SFTP - SMTP - SNMP Inform - SNMP Trap - SNMPv1/v2c/v3 - Syslog - Telnet - TFTP
Filter	- GMRP - GVRP - GARP 802.1Q - IGMP Snooping v1/v2/v3 - IGMP Querier
Redundancy Protocols	- Link Aggregation - MRP - MRP Interconnection - MSTP - Multiple Dual Homing - Multiple Network Coupling - Network Loop Protection - Ring Coupling - RSTP - STP - Tracking - Turbo Chain - Turbo Ring v2
Security	- Access control list - Broadcast storm protection - DHCP Snooping - Dynamic ARP Inspection - HTTPS/SSL - IEEE 802.1AE MAC security - IP Source Guard - Login and password policy - MAC authentication bypass - RADIUS - Rate Limit - Secure boot - SSH - Static port lock - Sticky MAC - TACACS+ - Trust access control
Time Management	- IEEE 1588v2 PTP (hardware-based) - NTP Authentication - NTP Server/Client - SNTP - Supported power profiles: IEEE 1588 Default 2008, IEC 61850-9-3-2016, IEEE C37.238-2017
Protocols	802.1X - ARP

	DNS HTTP HTTPS ICMP IPv4 NTP Client QoS RARP RMON SMTP SNMPv1/v2c/v3 Syslog TCP/IP Telnet TFTP UDP VLAN Assignment
Industrial Protocols	EtherNet/IP Modbus TCP PROFINET
MIB	IEEE8021-PAE-MIB IEEE8021-SPANNING-TREE-MIB IEEE8023-LAG-MIB LLDP-EXT-DOT1-MIB LLDP-EXT-DOT3-MIB P-BRIDGE MIB Q-BRIDGE-MIB RMON MIB Groups 1, 2, 3, 9 SNMPv2-MIB
Power Substation	1588 PTP Power Profile IEC 61850-9-3 1588 PTP Power Profile C37.238-2017 GOOSE Check MMS

Switch Properties

IGMP Groups	2048
Jumbo Frame Size	9.216 KB
MAC Table Size	32 K
Max. No. of VLANs	512
Packet Buffer Size	8 MB
Priority Queues	8
VLAN ID Range	VID 1 to 4094

USB Interface

Storage Port	USB Type A
--------------	------------

MicroSD Interface

Storage Port	microSD card
--------------	--------------

LED Interface

LED Indicators	PWR1, PWR2, STATE, FAULT, MSTR/HEAD, CPLR/TAIL, SYNC, EPS1, EPS2
----------------	--

Serial Interface

Console Port	RS-232 (RJ45)
--------------	---------------

Input/Output Interface

Alarm Contact Channels	1 relay output with current carrying capacity of 2 A @ 30 VDC, 0.5A @ 125VAC
Buttons	Reset button

Power Parameters

Total PoE Power Budget	720 W ²
Max. PoE Power Output per Port	IEEE 802.3af: 15.4 W IEEE 802.3at: 30 W IEEE 802.3bt: 90 W
Input Voltage	Isolated Power Module PWR-310-HV: 110/220 VDC, 110/220 VAC PWR-310-HVA: 110/220 VAC PWR-310-LV: 12/24/48 VDC Isolated Power Module with PoE EPS PWR-310-HV-P: 110/220 VAC, 110/220 VDC, EPS Input: 48–57 VDC PWR-310-LV-P: 12/24/48 VDC, EPS Input: 48–57 VDC (For PoE+ applications, a minimum of 53 VDC is recommended)
Operating Voltage	PWR-310-LV / PWR-310-LV-P models: 10.8 to 72 VDC PWR-310-HV: 88 to 300 VDC, 85 to 264 VAC PWR-310-HVA: 85 to 264 VAC PoE models: 46 to 57 VDC (for the PoE system)
Overload Current Protection	Supported
Reverse Polarity Protection	Supported
Input Current	PWR-310-LV / PWR-310-LV-P models: Max. 8 A @ 12 VDC Max. 3.08 A @ 24 VDC Max. 1.52 A @ 48 VDC PWR-310-HV/PWR-310-HV-P models: Max. 0.67 A @ 110 VDC Max. 0.33 A @ 220 VDC Max. 0.79 A @ 110 VAC Max. 0.35 A @ 220 VAC PWR-310-HVA models: Max. 0.79 A @ 110 VAC Max. 0.35 A @ 220 VAC EPS (PoE models only): Max. 12 A @ 48 to 57 VDC
Power Consumption (Max.)	RKS-G4030-PL with PWR-310 LV and LV-P Modules: Max. 92.81 W @ 12 VDC Max. 78.65 W @ 24 VDC Max. 77.55 W @ 48 VDC RKS-G4030-PL with PWR-310 HV and HV-P Modules: Max. 78.21 W @ 110 VDC Max. 77.55 W @ 220 VDC Max. 77.11 W @ 110 VAC Max. 76.01 W @ 220 VAC RKS-G4030-PL with PWR-310 HVA Modules: Max. 77.11 W @ 110 VAC Max. 76.01 W @ 220 VAC

Physical Characteristics

IP Rating	IP40 ³
Dimensions	440 x 44 x 387 mm (17.32 x 1.72 x 15.24 in)
Weight	RKS-G4030-PL-PoE-8QGT-6XGS-T: 5490 g (12.10 lb) RKS-G4030-PL-8QGT-6XGS-T: 5440 g (11.99 lb) RM-G4000-PL LAN Port Module: RM-G4000-PL-8GSFP: 505 g (1.11 lb) RM-G4000-PL-8GTX: 438 g (0.97 lb) RM-G4000-PL-8GPoE: 596 g (1.31 lb) PWR-310 Power Module: PWR-310-LV: 854 g (1.88 lb) PWR-310-HV: 854 g (1.88 lb) PWR-310-HVA: 861g (1.90 lb) PWR-310-LV-P: 830 g (1.83 lb) PWR-310-HV-P: 845 g (1.86 lb)
Installation	Rack mounting

Environmental Limits

Operating Temperature	-40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

EMC	EN 55032/35 EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 20 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF IEC 61000-4-11 AC Voltage Dips and Interruptions IEC 61000-4-29 DC Voltage Dips and Interruptions
Cybersecurity	IEC 62443-4-2 Security Level 2
Safety	EN IEC 62368-1 IEC 62368-1 UL 61010-1 UL 61010-2-201 UL 62368-1
Power Substation	IEC 61850-3 Edition 2.0 IEC 61850-90-4 IEEE 1613 Class 2 (EMC)
Railway	EN 50121-4
Traffic Control	NEMA TS2
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6

3. すべてのポート/インターフェース実装時

Package Drop Test	ISTA 1A
Package Vibration Test	ISTA 1A

MTBF

Time	RKS-G4030-PL-8QGT-6XGS-T models: 1,642,225 hours RKS-G4030-PL-PoE-8QGT-6XGS-T models: 1,167,504 hours
Standards	Telcordia (Bellcore), GB

Warranty


Warranty Period	5 years
Details	See www.moxa.com/jp/warranty

Package Contents

Device	1 x RKS-G4030-PL Series switch
Installation Kit	2 x rack-mounting ear 6 x protective caps for unused SFP ports
Documentation	1 x quick installation guide 1 x warranty card
Note	1. Only the RKS-G4030-PL-PoE and RKS-G4028-PL-PoE models support PoE functionality with RM-G4000-PL-8GPoE modules. 2. Only the PWR-310-LV-P, PWR-310-HV-P support RKS-G4030-PL-PoE and RKS-G4028-PL-PoE models PoE function 3. Power over Ethernet requires the 48 VDC external power supply. (53 to 57 VDC is recommended for PoE+ devices) 4. The 48 VDC external power supply, SFP modules, isolated system power supply from PWR-310 series and modules from the RM-G4000-PL Module Series need to be purchased separately for use with this product.

寸法

単位：mm（インチ）

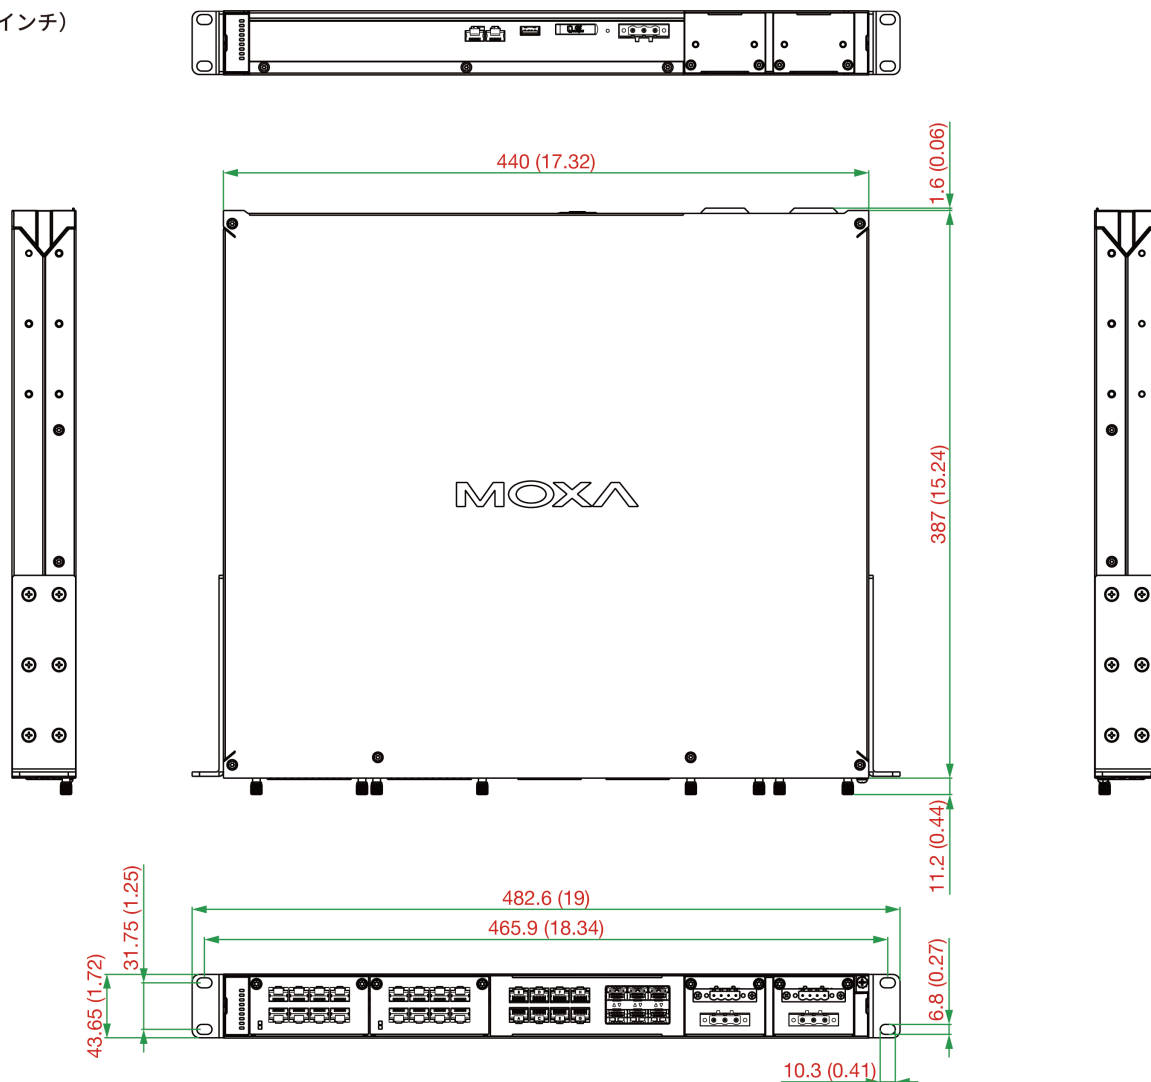

注文情報

Model Name	Max. No. of Ports	10GbE SFP+ Ports	10/100/1000/2500 BaseT(X) Ports (RJ-45)	100/1000BaseSFP Ports (Expansion Module)	10/100/1000BaseT(X) Ports RJ45 Ports (Expansion Module)	PoE Support	L3 Functionality	Operating Temp.
RKS-G4030-PL-PoE-8QGT-6XGS-T	30	6	8	Up to 16 (8 ports per module)	Up to 16 (8 ports per module)	P	–	-40 to 75°C (-40 to 167°F)
RKS-G4030-PL-8QGT-6XGS-T	30	6	8	Up to 16 (8 ports per module)	Up to 16 (8 ports per module)	–	–	-40 to 75°C (-40 to 167°F)

アクセサリ（別売）

Expansion Modules

RM-G4000-PL-8GTX	Gigabit Ethernet module with 8 100/1000BaseT(X) ports
RM-G4000-PL-8GSFP	Gigabit Ethernet module with 8 100/1000BaseSFP ports
RM-G4000-PL-8GPoE	Gigabit Ethernet module with 8 100/1000BaseT(X) IEEE 802.3bt PoE ports

Power Modules

PWR-310-LV	12/24/48 VDC power supply module with system power input
PWR-310-HV	110/220 VAC/VDC power supply module with system power input

PWR-310-HVA	110/220 VAC power supply module with system power input, AC power inlet
PWR-310-LV-P	12/24/48 VDC power supply module with system power input, PoE power input
PWR-310-HV-P	110/220 VAC/VDC power supply module with system power input, PoE power input

SFP Modules

SFP-1G10ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G10BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G20ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G20BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G40ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G40BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G10ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G10BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G20ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G20BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G40ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G40BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1GSXLC	SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature
SFP-1GLSXL	SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature
SFP-1GLXLC	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature
SFP-1GLHXL	SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature
SFP-1GZXLC	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature
SFP-1GEZXL	SFP module with 1 1000BaseEZX port with LC connector for 110 km transmission, 0 to 60°C operating temperature
SFP-1GSXLC-T	SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature
SFP-1GLSXL-T	SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature
SFP-1GLXLC-T	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature
SFP-1GLHLC-T	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature
SFP-1GLHXL-T	SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-1GZXLC-T	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature

SFP-1GEZXLC-120	SFP module with 1 1000BaseEZX port with LC connector for 120 km transmission, 0 to 60°C operating temperature
SFP-1GTXRJ45-T	SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature
SFP-2.5GMLC-T	SFP module with 1 2.5GBaseFX port with LC connector, multi-mode, for 170, 200, 550, 600 m transmission, -40 to 85 °C operating temperature
SFP-2.5GSLC-T	SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 5 km transmission, -40 to 85 °C operating temperature
SFP-2.5GLSLC-T	SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 20 km transmission, -40 to 85 °C operating temperature
SFP-2.5GSLHLC-T	SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 45 km transmission, -40 to 85 °C operating temperature
SFP-10GSRLC-T	SFP+ module with 1 10GBase-SR port, LC connector for 33m/82m/300m/400m transmission, -40 to 85°C operating temperature
SFP-10GLRLC-T	SFP+ module with 1 10GBase-LR port, LC connector for 10 km transmission, -40 to 85°C operating temperature
SFP-10GERLC-T	SFP+ module with 1 10GBase-ER port, LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-10GZRLC-T	SFP+ module with 1 10GBase-ZR port, LC connector for 80 km transmission, -40 to 85°C operating temperature
SFP-1FELLC-T	SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature
SFP-1FEMLC-T	SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature
SFP-1FESLC-T	SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature

Cables

CN20070	10-pin RJ50 to DB9 female serial cable
PWC-C15US-3B-183	Power cord with US plug, 1.83 m, -40 to 75°C operating temperature
PWC-C15EU-3B-183	Power cord with EU plug, 1.83 m, -40 to 75°C operating temperature

Software

LIC-MXviewOne-NEW-XN-SR	MXview One node license with customizable node quantity (minimum 1 node)
-------------------------	--

Storage Kits

ABC-02-USB	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature
ABC-02-USB-T	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature
ABC-03-microSD-T	MicroSD-based configuration backup and restoration tool, firmware upgrades, and log file storage tool for managed Ethernet switches and WLAN products, -40 to 85°C operating temperature

© Moxa Inc. All rights reserved.2026年6月11日更新。

Moxa Inc.の明白な許可を書面で取得しない限り、本書およびその一部の複製や使用はいかなる方法やいかなる場合でも許可されません。製品の仕様は予告なく変更されることがあります。最新の製品情報については当社のWebサイトをご覧ください。