

EDS-208A 系列

8 埠小巧非網管型乙太網路交換器



特色與優點

- 10/100BaseT(X) (RJ45 連接器) 、100BaseFX (多 / 單模式、SC 或 ST 連接器)
- 雙備援 12/24/48 VDC 電源輸入
- IP30 鋁製外殼
- 堅固耐用的硬體設計，非常適合環境嚴苛場域應用 (Class 1 Div. 2/ATEX Zone 2)、運輸應用 (NEMA TS2/EN 50121-4) 以及海事環境 (DNV/LR/ABS/NK)
- -40 至 75°C 寬操作溫度範圍 (-T 型號)

認證



簡介

EDS-208A 系列 8 埠工業級乙太網路交換器支援 IEEE 802.3 和 IEEE 802.3u/x，具有 10/100M、全/半雙工、MDI/MDI-X 自動感測功能。EDS-208A 系列具有 12/24/48 VDC (9.6 至 60 VDC) 備援電源輸入，可同時連接至直流電源。此系列交換器專為嚴苛工業環境所設計，例如海事 (DNV/LR/ABS/NK)、軌道沿線、高速公路或行動應用 (EN 50121-4/NEMA TS2/e-Mark)，或危險場所 (Class I Div. 2, ATEX Zone 2)，並且符合 FCC、UL 和 CE 標準。

EDS-208A 交換器提供可運作於 -10 至 60°C 的標準溫度型號和運作於 -40 至 75°C 的寬溫型號，所有型號都經過 100% 的燒機測試，確保符合工業自動化控制應用的特殊需求。此外，EDS-208A 交換器具有 DIP 開關，用於啟用或停用廣播風暴保護功能，提高工業應用的靈活性。

規格

Ethernet Interface	
10/100BaseT(X) Ports (RJ45 connector)	EDS-208A/208A-T Models: 8 EDS-208A-M-SC/M-ST/S-SC Models: 7 EDS-208A-MM-SC/MM-ST/SS-SC Models: 6 All Models Support: Auto negotiation speed Full/Half duplex mode Auto MDI/MDI-X connection
100BaseFX Ports (multi-mode SC connector)	EDS-208A-M-SC Models: 1 EDS-208A-MM-SC Models: 2
100BaseFX Ports (multi-mode ST connector)	EDS-208A-M-ST Models: 1 EDS-208A-MM-ST Models: 2
100BaseFX Ports (single-mode SC connector)	EDS-208A-S-SC Models: 1 EDS-208A-SS-SC Models: 2

Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for flow control				
Optical Fiber			100BaseFX		
			Multi-Mode		Single-Mode
			OM1	50/125 μm	G.652
				800 MHz x km	
	Typical Distance		4 km	5 km	40 km
	Wavelength	Typical (nm)	1300		1310
		TX Range (nm)	1260 to 1360		1280 to 1340
		RX Range (nm)	1100 to 1600		1100 to 1600
	Optical Power	TX Range (dBm)	-10 to -20		0 to -5
		RX Range (dBm)	-3 to -32		-3 to -34
		Link Budget (dB)	12		29
		Dispersion Penalty (dB)	3		1
	Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power. Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) > dispersion penalty (dB) + total link loss (dB).				

Switch Properties

MAC Table Size	2 K
Packet Buffer Size	768 kbits
Processing Type	Store and Forward

Power Parameters

Connection	1 removable 4-contact terminal block(s)
Input Current	EDS-208A/208A-T, EDS-208A-M-SC/M-ST/S-SC Models: 0.11 A @ 24 VDC EDS-208A-MM-SC/MM-ST/SS-SC Models: 0.15 A @ 24 VDC
Input Voltage	12/24/48 VDC Redundant dual inputs
Operating Voltage	9.6 to 60 VDC
Overload Current Protection	Supported
Reverse Polarity Protection	Supported

DIP Switch Configuration

Ethernet Interface	Broadcast storm protection
--------------------	----------------------------

Physical Characteristics

Housing	Aluminum
IP Rating	IP30
Dimensions	50 x 114 x 70 mm (1.96 x 4.49 x 2.76 in)

Weight	275 g (0.61 lb)
Installation	DIN-rail mounting Wall mounting (with optional kit)

Environmental Limits

Operating Temperature	Standard Models: -10 to 60°C (14 to 140°F) Wide Temp. Models: -40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

Safety	UL 508 EN 62368-1 (LVD)
EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Hazardous Locations	ATEX Class I Division 2
Railway	EN 50121-4
Traffic Control	NEMA TS2
Vibration	IEC 60068-2-6
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-31
Maritime	ABS LR NK DNV

MTBF

Time	EDS-208A: 3,248,014 hrs EDS-208A-MM/SS: 2,705,157 hrs EDS-208A-M/S: 2,943,335 hrs
Standards	Telcordia (Bellcore), GB

Warranty


Warranty Period	5 years
Details	See www.moxa.com/tw/warranty

Package Contents

Device	1 x EDS-208A Series switch
Documentation	1 x quick installation guide 1 x warranty card

尺寸

單位：公釐（英吋）

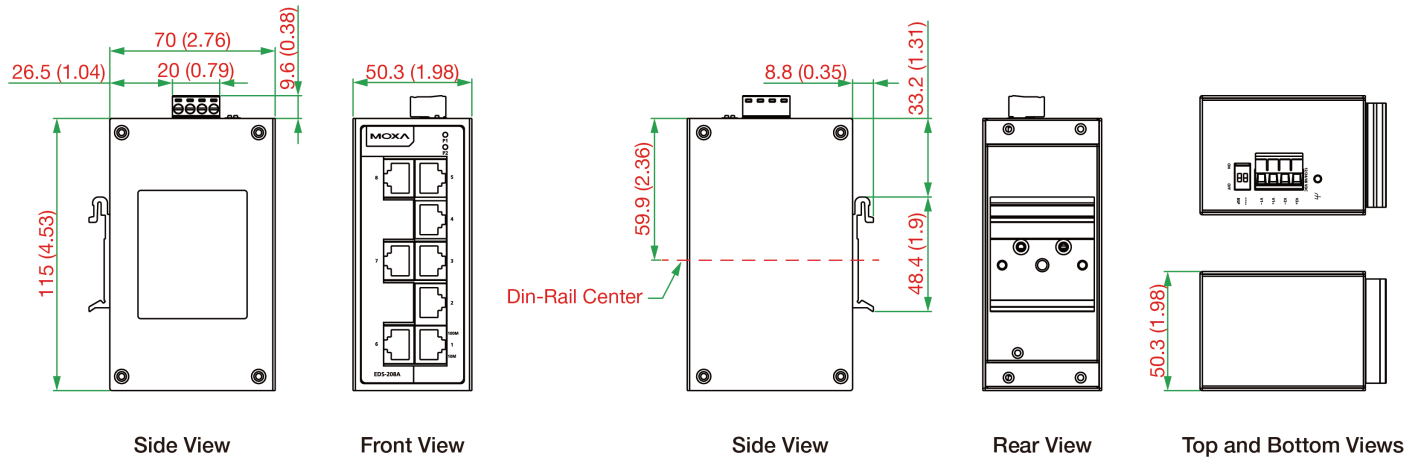

訂購資訊

Model Name	10/100BaseT(X) Ports RJ45 Connector	100BaseFX Ports Multi-Mode, SC Connector	100BaseFX Ports Multi-Mode, ST Connector	100BaseFX Ports Single-Mode, SC Connector	Operating Temp.
EDS-208A	8	–	–	–	-10 to 60°C
EDS-208A-T	8	–	–	–	-40 to 75°C
EDS-208A-M-SC	7	1	–	–	-10 to 60°C
EDS-208A-M-SC-T	7	1	–	–	-40 to 75°C
EDS-208A-M-ST	7	–	1	–	-10 to 60°C
EDS-208A-M-ST-T	7	–	1	–	-40 to 75°C
EDS-208A-MM-SC	6	2	–	–	-10 to 60°C
EDS-208A-MM-SC-T	6	2	–	–	-40 to 75°C
EDS-208A-MM-ST	6	–	2	–	-10 to 60°C
EDS-208A-MM-ST-T	6	–	2	–	-40 to 75°C
EDS-208A-S-SC	7	–	–	1	-10 to 60°C
EDS-208A-S-SC-T	7	–	–	1	-40 to 75°C
EDS-208A-SS-SC	6	–	–	2	-10 to 60°C
EDS-208A-SS-SC-T	6	–	–	2	-40 to 75°C

配件（選購）

Power Supplies

MDR-40-24	DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
MDR-60-24	DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
HDR-60-24	60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature
NDR-120-24	120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature
NDR-240-48	240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature

NDR-120-48	120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature
------------	--

Wall-Mounting Kits

WK-46-01	Wall-mounting kit, 2 plates, 8 screws, 46 x 66.8 x 2 mm
----------	---

Rack-Mounting Kits

RK-4U	19-inch rack-mounting kit
-------	---------------------------

© Moxa Inc. 版權所有.2025 年 8 月 26 日更新。

未經 Moxa Inc. 明確書面許可，不得以任何方式複製或使用本文件及其任何部分。產品規格如有變更，恕不另行通知。請至本公司官網了解最新的產品資訊。