

DA-660A 系列

基於 Arm 架構、採用 500 MHz 處理器、具備 4 個 LAN 連接埠和 8 至 16 個串列埠的 1U 機架安裝工業電腦



特色與優點

- MoxaMacro 500 MHz 處理器，具備 128 MB 板載 RAM 和 32 MB 快閃記憶體
- 8 至 16 個可由軟體選擇的 RS-232/422/485 串列埠
- 8 至 16 個可由跳接器設定的 1/150 kΩ 上拉/下拉電阻和 120 歐姆終端電阻
- 所有串列訊號皆具有 15 kV ESD 防護
- 四個 10/100 Mbps 乙太網路埠
- USB 和 CF 插槽，用於擴充儲存空間
- 標準 19 吋機架安裝，1U 高度
- 100 至 240 VAC 寬壓電源輸入
- HMI 專用 LCM 顯示器和鍵盤
- 可直接執行的 Linux 作業系統平台
- 穩定的無風扇設計
- 提供具有串列埠隔離保護的型號

認證




簡介

DA-660A 系列是基於 Arm 架構、可直接執行的嵌入式電腦，專為工業資料採集應用所設計。此系列電腦具有 8 至 16 個 RS-232/422/485 串列埠、4 個乙太網路連接埠和 2 個 USB 2.0 連接埠，皆以 MoxaMacro 通訊處理器為基礎。此外，DA-662A-I-8/16-LX 串列埠具有高度抗干擾保護。外殼採用標準 1U 19 英寸寬機架安裝設計，堅固耐用。而穩固的機架安裝設計則提供工業環境應用所需的強化保護，讓使用者可以輕鬆將 DA-660A 電腦安裝在標準 19 吋機架上。


DA-660A 電腦非常適合需要分散式嵌入式技術的應用，例如 SCADA 系統、工廠現場自動化以及電力監控等應用。

外觀

Front View (DA-662A-8)

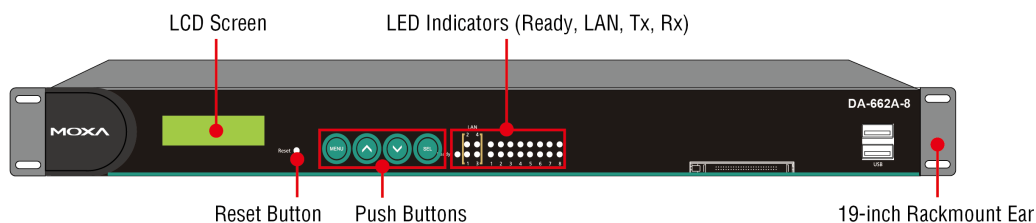


Front View (DA-662A-16)

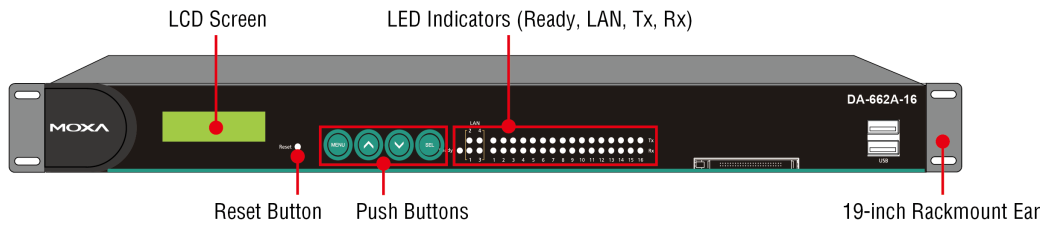

Rear View (DA-662A-8)



Rear View (DA-662A-16)

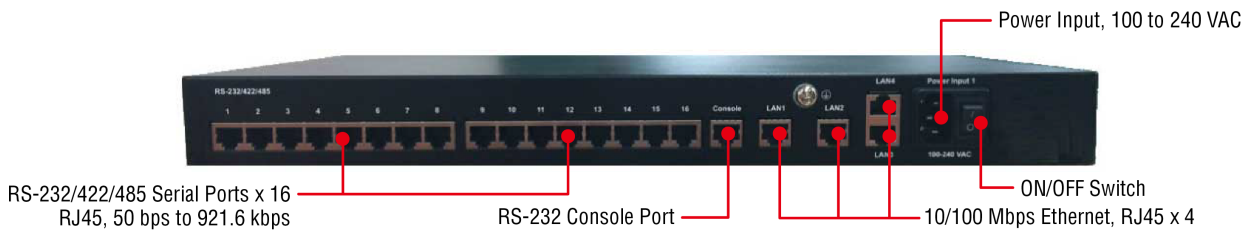

規格

Computer

CPU	MoxaMacro 500 MHz
SDRAM	128 MB
Flash	NOR Flash, 32 MB
Pre-installed OS	Linux
LCD Module	Liquid Crystal Display on the case, 2x16 text mode

Ethernet Interface

Ethernet Ports	Auto-sensing 10/100 Mbps ports (RJ45 connector) x 4
Magnetic Isolation Protection	1.5 kV (built-in)

LED Indicators

System	System Ready x 1
Serial	2 per port (Tx, Rx)

Serial Interface

Serial Ports	8-port models: 8 x RS-232/422/485 16-port models: 16 x RS-232/422/485
Console Port	1 x RJ45

Serial Signals

Data Bits	5, 6, 7, 8
Stop Bits	1, 1.5, 2
Parity	None, Even, Odd, Space, Mark
Flow Control	RTS/CTS, XON/XOFF, ADDC® (automatic data direction control) for RS-485, RTS Toggle (RS-232 only)
Baudrate	50 bps to 921.6 kbps
RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND

Power Parameters

Input Voltage	100 to 240 VAC
Power Consumption	20 W

Reliability

Alert Tools	Built-in buzzer and RTC (real-time clock)
Automatic Reboot Trigger	Built-in WDT

Physical Characteristics

Dimensions	480 x 45 x 237 mm (18.9 x 1.77 x 9.33 in)
Weight	4,300 g (9.56 lb)

Environmental Limits

Operating Temperature	-10 to 60°C (14 to 140°F)
Storage Temperature (package included)	-20 to 70°C (-4 to -158°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Vibration	1g @ IEC-68-2-6, sine wave (resonance search), 5-500 Hz, 1 Oct/min, 1 Cycle, 13 mins 17 sec per axis

Standards and Certifications

Safety	UL 60950-1
EMC	EN 61000-6-2/-6-4
EMI	CISPR 22, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 4 kV IEC 61000-4-6 CS: 3 V/m IEC 61000-4-8: 1 A/m IEC 61000-4-11
Green Product	RoHS, CRoHS, WEEE

MTBF

Time	DA-662A-8-LX: 272,913 hrs DA-662A-16-LX: 177,580 hrs DA-662A-16-DP-LX: 177,260 hrs DA-662A-I-8-LX: 268,332 hrs DA-662A-I-16-LX: 189,455 hrs
Standards	Telcordia (Bellcore) Standard

Warranty


Warranty Period	5 years
Details	See www.moxa.com/tw/warranty

Package Contents

Device	1 x DA-660A Series computer
Installation Kit	1 x rack-mounting kit
Cable	1 x 8-pin RJ45 to DB9 male serial port cable, 150 cm 1 x RJ45-to-RJ45 cross-over cable, 100 cm 1 x 8-pin RJ45 to DB9 female console port cable, 150 cm 6 x jumper cap
Documentation	1 x document and software CD 1 x quick installation guide 1 x warranty card

尺寸

單位：公釐

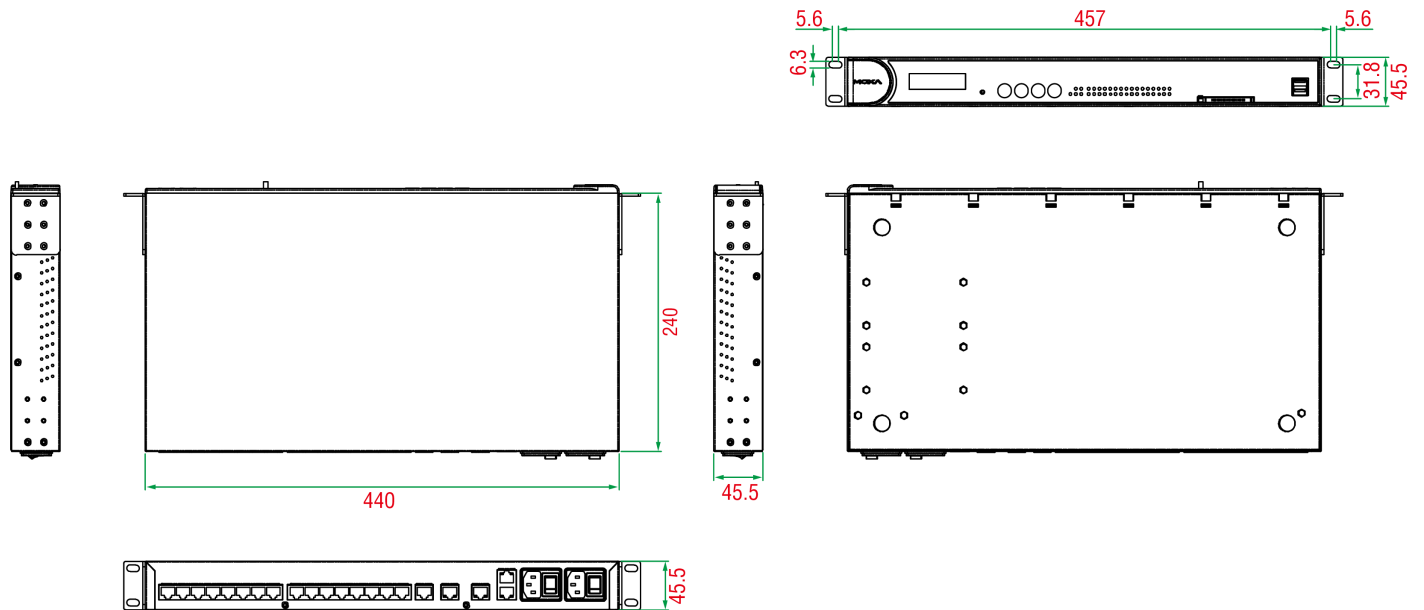

訂購資訊

Model Name	RS-232/422/485 Ports	RS-485 Serial Ports (2-Wire Only)	10/100 Mbps LAN Ports
DA-662A-8-LX	8	-	4
DA-662A-16-LX	16	-	4
DA-662A-16-DP-LX	16	-	4

Model Name	RS-232/422/485 Ports	RS-485 Serial Ports (2-Wire Only)	10/100 Mbps LAN Ports
DA-662A-I-8-LX	4	4	4
DA-662A-I-16-LX	4	12	4

配件 (選購)

Power Cords

PWC-C7AU-2B-183	Power cord with Australian (AU) plug, 2.5A/250V, 1.83 m
PWC-C7CN-2B-183	Power cord with two-prong China (CN) plug, 1.83 m
PWC-C7EU-2B-183	Power cord with Continental Europe (EU) plug, 2.5A/250V, 1.83 m
PWC-C7UK-2B-183	Power cord with United Kingdom (UK) plug, 2.5A/250V, 1.83 m
PWC-C7US-2B-183	Power cord with United States (US) plug, 10A/125V, 1.83 m

Power Adapters

PWR-24270-DT-S1	Power adapter, input voltage 90 to 264 VAC, output voltage 24 V with 2.5 A DC load
-----------------	--

© Moxa Inc. 版權所有. 2020 年 1 月 21 日 更新。

未經 Moxa Inc. 明確書面許可，不得以任何方式複製或使用本文件及其任何部分。產品規格如有變更，恕不另行通知。請至本公司官網了解最新的產品資訊。