

PT-G510 系列

IEC 61850-3 10 埠 Layer2 全 Gigabit PRP/HSR 網管型乙太網路交換器



特色與優點

- 符合 IEC 61850-3 Edition2 Class2
- 符合 IEC 62439-3 第 4 條 (PRP) 和第 5 條 (HSR)
- 支援 IEEE 1588 (PTP) 硬體時間戳記
- 支援 IEEE C37.238 和 IEC 61850-9-3 電源設定檔
- GOOSE Check 適用於輕鬆故障排除
- 內建 MMS Server，採用 IEC 61850-90-4 交換器資料模型，適用於 Power SCADA
- -40°C 至 75°C 操作溫度範圍

認證



EN 50121-4

IEC 61850-3 IEEE 1613



簡介

PT-G510 系列能夠為需要零復原時間備援的數位變電站中的關鍵任務應用提供最高級的系統可用性和數據完整性。PT-G510 系列支援 PRP/HSR，實現變電站和製程自動化系統的無縫備援。時間關鍵型應用也支援硬體型 IEEE 1588v2 PTP。PT-G510 系列採用高度耐用的設計，並通過 IEC 61850-3 Edition 2 Class 2 認證，可滿足變電站應用的嚴格要求。

PT-G510 系列配備 8 個 100/1000BaseT(X) 乙太網路連接埠或 100/1000BaseSFP 插槽，具備兩個專用 100/1000BaseSFP PRP/HSR 連接埠，並支援完整的備援協定套件，其中包括 PRP、HSR、MRP、STP、MSTP 和 RSTP，藉以達到最大的網路可靠性。PT-G510 系列也支援 GOOSE Check 以有效監控 GOOSE 封包，並內建 MMS Server，採用 IEC 61850-90-4 交換器數據模型，適用於 Power SCADA 系統。

規格

Ethernet Interface

100/1000BaseT(X) Ports (RJ45 connector)	PT-G510-8GTX-PHR models: 8 PT-G510-4GTX4GSFP-PHR models: 4
100/1000BaseSFP Ports	PT-G510-8GSFP-PHR models: 10 PT-G510-4GTX4GSFP-PHR models: 6
Standards	IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3ab for 1000BaseT(X) IEEE 802.3z for 1000BaseX IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1Q for VLAN Tagging IEEE 802.1X for authentication IEEE 802.3ad for Port Trunk with LACP IEEE 802.3x for flow control

Ethernet Software Features

Management	<p>HTTPS Back Pressure Flow Control DHCP Option 66/67/82 Fiber check Flow control LLDP Port Mirror SNMP Inform BOOTP DHCP Server/Client HTTP IPv4/IPv6 RARP SMTP SNMPv1/v2c/v3 Syslog Telnet TFTP</p>
MIB	<p>MIB-II Ethernet-like MIB Bridge MIB P-BRIDGE MIB Q-BRIDGE MIB RSTP MIB RMON MIB Groups 1, 2, 3, 9</p>
Filter	<p>IGMP v1/v2/v3 GMRP GVRP 802.1Q QinQ VLAN</p>
Redundancy Protocols	<p>Link Aggregation MSTP RSTP STP Turbo Chain Turbo Ring MRP HSR PRP Coupling RSTP grouping</p>
Security	<p>RADIUS TACACS+ SSH Port Lock Broadcast storm protection MAB authentication Sticky MAC Access control list</p>
Time Management	<p>NTP Server/Client SNTP IEEE 1588v2 PTP (hardware-based)</p>
Power Substation	<p>GOOSE Check IEC 61850 QoS MMS</p>

Switch Properties

Priority Queues	8
Max. No. of VLANs	256
VLAN ID Range	1 to 4094
RSTP Grouping ID Range	1 to 4094

IGMP Groups	4096
MAC Table Size	16 K
Packet Buffer Size	12 Mbits

Serial Interface

Console Port	RS-232 (RJ45)
--------------	---------------

USB Interface

Storage Port	USB Type A
--------------	------------

Power Parameters

Input Voltage	<p>-HV models: 110-220 VAC, 110-220 VDC (88 to 300 VDC, 85 to 264 VAC)</p> <p>-WV models: 24-48 VDC (18 to 72 VDC)</p> <p>Note: Both -HV and -WV models support dual power inputs with a single power module.</p>
Input Current	<p>-HV models: 0.5 A @ 110-220 VAC 0.3 A @ 110-220 VDC</p> <p>-WV models: 1.1 A @ 24-48 VDC</p>
Alarm Contact Channels	Resistive load: 1 A @ 24 VDC
Overload Current Protection	Supported
Reverse Polarity Protection	Supported

Physical Characteristics

IP Rating	IP30
Dimensions (without ears)	74 x 148 x 120 mm (2.91 x 5.83 x 4.72 in)
Weight	1476 g (3.25 lb)
Installation	DIN-rail mounting

Environmental Limits

Operating Temperature	<p>-40 to 75°C (-40 to 167°F)</p> <p>-40 to 85°C (-40 to 185°F) for 16 hrs (tested in accordance with IEC 60068-2-2)</p>
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	<p>IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV</p> <p>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m</p> <p>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV</p> <p>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV</p> <p>IEC 61000-4-6 CS: 10 V</p> <p>IEC 61000-4-8 PFMF</p> <p>EN 61000-4-11</p>
Power Substation	IEC 61850-3 Edition 2.0 Class 2

	IEEE 1613
Railway	EN 50121-4
Maritime	-WV models: DNV IEC 60945
Safety	IEC 62368-1 UL 62368-1

MTBF

Time	688,584 hrs
Standards	Telcordia (Bellcore) Standard TR/SR

Warranty


Warranty Period	5 years
Details	See www.moxa.com/tw/warranty

Package Contents

Device	1 x PT-G510 Series switch
Cable	1 x RJ45-to-DB9 console cable
Installation Kit	1 x DIN-rail kit 1 x cap, for type A USB port 6 or 10 x cap, plastic, for SFP port
Documentation	1 x quick installation guide 1 x warranty card 1 x substance disclosure table 1 x product certificates of quality inspection, Simplified Chinese 1 x product notice, Simplified Chinese
Note	SFP modules need to be purchased separately for use with this product.

尺寸

單位：公釐 (英吋)

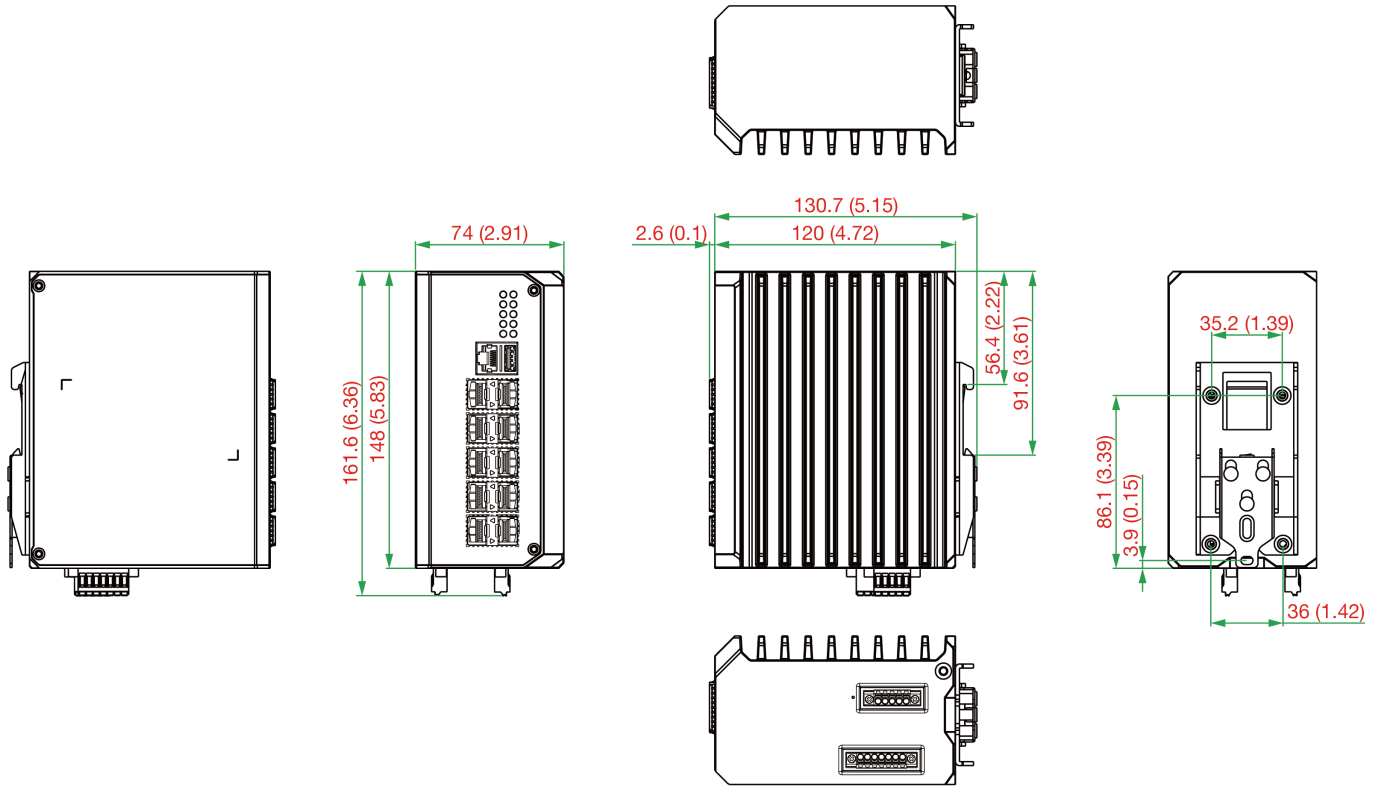

訂購資訊

Model Name	100/1000BaseT(X) Ports (RJ45 Connector)	100/ 1000BaseBaseSFP Slots	Operating Voltage	Conformal Coating	Operating Temp.
PT-G510-8GSFP-PHR-HV	-	10	110-220 VDC/VAC	-	-40 to 75°C
PT-G510-8GSFP-PHR-WV	-	10	24-48 VDC	-	-40 to 75°C
PT-G510-8GTX-PHR-HV	8	2	110-220 VDC/VAC	-	-40 to 75°C
PT-G510-8GTX-PHR-WV	8	2	24-48 VDC	-	-40 to 75°C
PT-G510-4GTX4GSFP-PHR-HV	4	6	110-220 VDC/VAC	-	-40 to 75°C
PT-G510-4GTX4GSFP-PHR-WV	4	6	24-48 VDC	-	-40 to 75°C
PT-G510-8GSFP-PHR-HV-CT	-	10	110-220 VDC/VAC	✓	-40 to 75°C
PT-G510-8GSFP-PHR-WV-CT	-	10	24-48 VDC	✓	-40 to 75°C
PT-G510-8GTX-PHR-HV-CT	8	2	110-220 VDC/VAC	✓	-40 to 75°C
PT-G510-8GTX-PHR-WV-CT	8	2	24-48 VDC	✓	-40 to 75°C
PT-G510-4GTX4GSFP-PHR-HV-CT	4	6	110-220 VDC/VAC	✓	-40 to 75°C
PT-G510-4GTX4GSFP-PHR-WV-CT	4	6	24-48 VDC	✓	-40 to 75°C

配件 (選購)

Software

MXview-50	MXview license for 50 nodes
MXview-100	MXview license for 100 nodes

MXview-250	MXview license for 250 nodes
MXview-500	MXview license for 500 nodes
MXview-1000	MXview license for 1000 nodes
MXview-2000	MXview license for 2000 nodes
MXview Upgrade-50	MXview license expansion for 50 nodes

Storage Kits

ABC-02-USB	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature
ABC-02-USB-T	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature

SFP Modules

SFP-1GTXRJ45-T	SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature
SFP-1FELLC-T	SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature
SFP-1FEMLC-T	SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature
SFP-1FESLC-T	SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-1G10ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G10ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G10BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G10BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G20ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G20ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G20BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G20BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G40ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G40ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G40BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G40BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1GEZXLC	SFP module with 1 1000BaseEZ port with LC connector for 110 km transmission, 0 to 60°C operating temperature
SFP-1GEZXLC-120	SFP module with 1 1000BaseEZ port with LC connector for 120 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC-T	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature
SFP-1GLHLC	SFP module with 1 1000BaseLH port with LC connector for 40 km transmission, 0 to 60°C operating temperature

SFP-1GLHXC-T	SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-1GLSXC	SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature
SFP-1GLSXC-T	SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature
SFP-1GLXC	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature
SFP-1GLXC-T	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature
SFP-1GSXC	SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature
SFP-1GSXC-T	SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature
SFP-1GZXC	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature
SFP-1GZXC-T	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature

© Moxa Inc. 版權所有.2024 年 8 月 06 日更新。

未經 Moxa Inc. 明確書面許可，不得以任何方式複製或使用本文件及其任何部分。產品規格如有變更，恕不另行通知。請至本公司官網了解最新的產品資訊。