ioPAC 6500 Series (65M) Power Modules

Power modules for modular programmable IIN controllers



Features and Benefits


- Separates system power from field power
- Tool-free hardware installation and hot-swap design for maximizing operation efficiency
- Fully modular design for maximum deployment flexibility
- Supports power redundancy

Certifications

Introduction


The power module supplies power to the unit (system power) and the I/O circuits (field power).

Separates System Power From Field Power

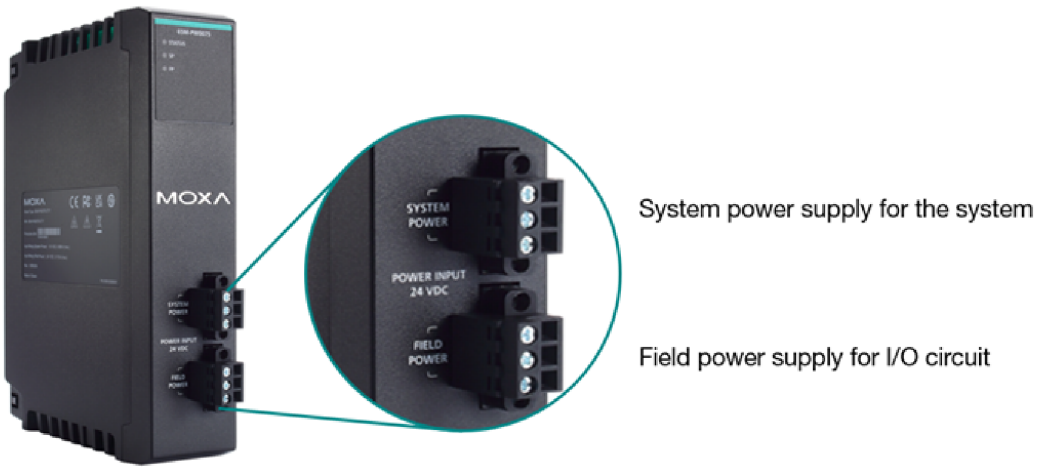

Fully Modular Design


The ioPAC 6500 Series features a unique design that is mistake-proof and supports tool-free assembly for flexible deployment while minimizing installation efforts. The series can be divided into the components: Backplane modules, power modules, communication modules, expansion modules, CPU modules, I/O modules, and terminal-block modules.

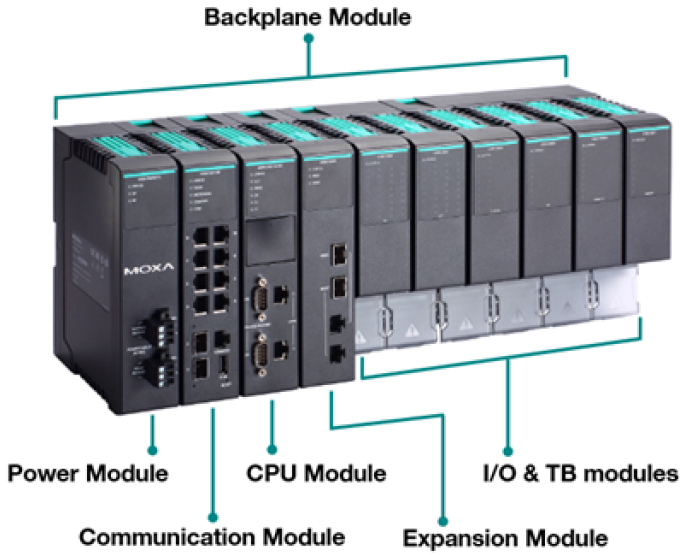



Power Redundancy

Dual power modules provide power redundancy to keep critical applications running reliably, minimizing the risk of unexpected downtime.

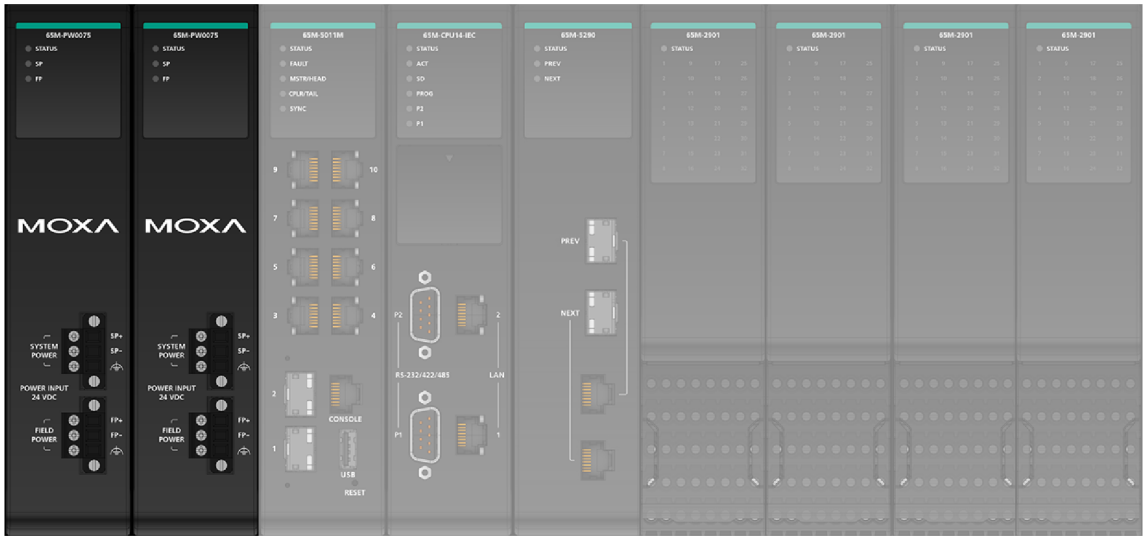

Specifications

System Power Parameters

Power Connector	Screw-fastened Euroblock terminal
No. of Power Inputs	1
Input Voltage	Nominal value: 24 VDC Acceptable range: 21.6 to 26.4 VDC
Input Current	4 A (max.)
Inrush Current	20 A (max.)
Internal Fuse Rating	10 A
Output Voltage	12 VDC

Output Current	6.25 A (max.)
Output Power	75 W (max.)
Output Hold-up Time	10 ms (min.)
Output Startup Delay Time	100 ms (max.)
Over-Voltage Protection	15.6 VDC (max.)
Over-Current Protection	9 A (min.)
Efficiency	87%
Isolation	3k VDC (input to output) 3k VDC (system to field power)

Field Power Parameters

Power Connector	Screw-fastened Euroblock terminal
No. of Power Inputs	1
Input Voltage	Nominal value: 24 VDC Acceptable range: 21.6 to 26.4 VDC
Input Current	3 A (max.)
Internal Fuse Rating	8 A
Output Voltage	3 A (max.) [Input Voltage - 0.4] VDC (max., matching diode drop at 3 A)
Over-voltage Protection	29 VDC (max.)
Over-current Protection	5 A (min.)

Physical Characteristics

Housing	Plastic
Dimensions	42 x 177 x 149.4 mm (1.65 x 6.97 x 5.88 in)
Weight	713 g (1.57 lb)
Installation	DIN-rail mounting Rack mounting (with optional kit)

Standards and Certifications

EMC	EN 55032/35 EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: (DC) 1 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: (DC) 0.5 kV L-N, 1 kV L/N-PE; Signal: 1 kV; IO: 0.5 kV IEC 61000-4-6 CS: Power: (DC) 10 V; Signal: 10 Vrms IEC 61000-4-8 PFMF: 30 A/m
Hazardous Locations	ATEX Zone 2 Class I Division 2 IECEx
Safety	UL 61010-1 UL 61010-2-201

Shock	IEC 60068-2-27 Half sine wave; acceleration: 15 g; time: 11 ms
Vibration	IEC 60068-2-6 DIN-rail mounted: 7 mm peak-peak (p-p) (2 to 8.42 Hz), 1 g (8.42 to 150 Hz) Rack mounted (with optional kit): 7 mm peak-peak (p-p) (2 to 8.42 Hz), 0.5 g (8.42 to 150 Hz)
Package Vibration Test	ISTA 1A
Package Drop Test	ISTA 1A

MTBF

Time	954,606 hrs
Standards	Telcordia Standard SR-332

Environmental Limits

Operating Temperature	-40 to 75°C (-40 to 167°F) Note: Proper airflow is required in an environment with temperature > 65°C
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Altitude	Up to 2000 m

Warranty


Warranty Period	5 years
Details	See www.moxa.com/warranty

Package Contents

Device	1 x ioPAC 6500 Series (65M) Power Module
Documentation	1 x warranty card 1 x quick installation guide

Dimensions

Unit: mm (inch)

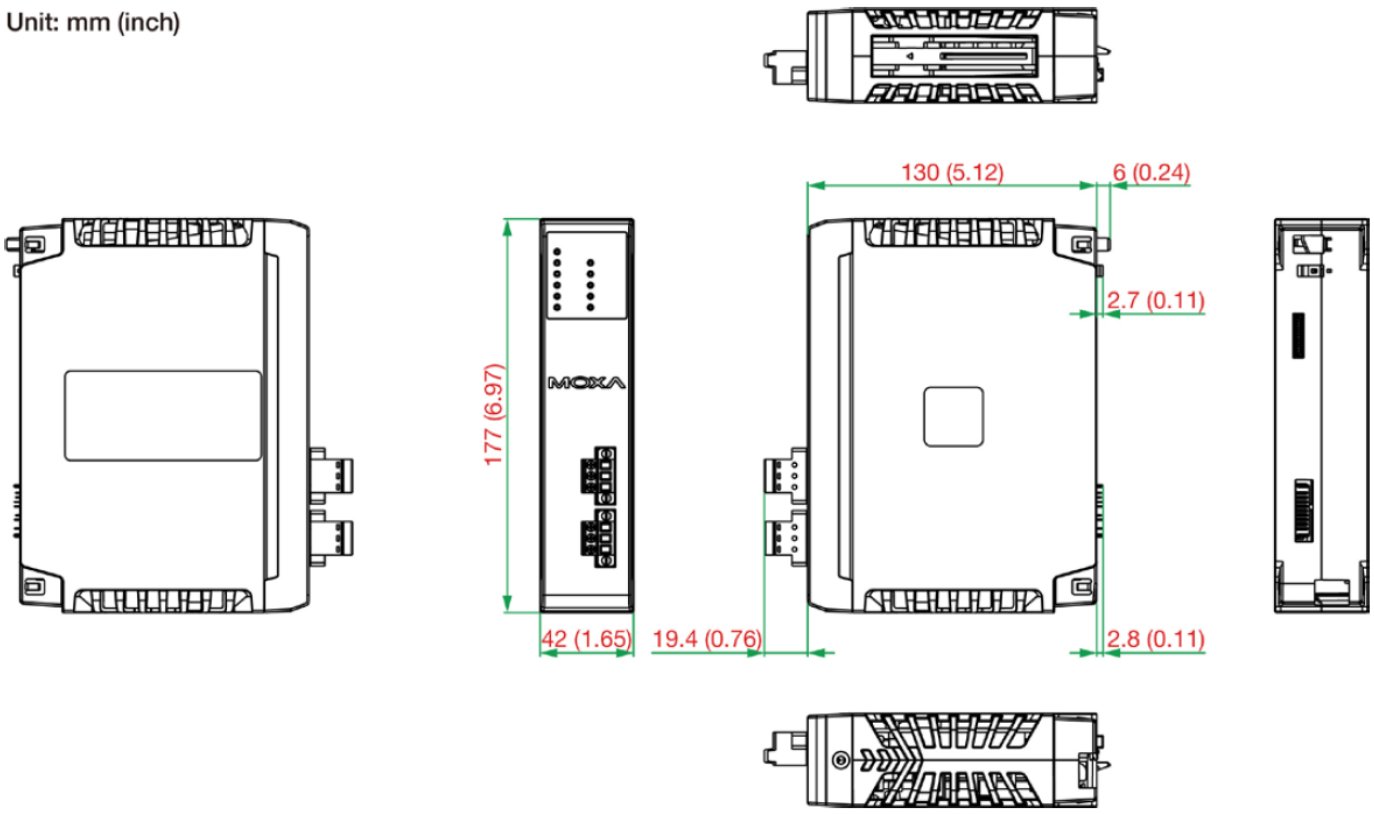

Ordering Information

Model Name	System Power	Conformal Coating	Operating Temperature
65M-PW0075-CT-T	75 W	Yes	-40 to 75°C

© Moxa Inc. All rights reserved. Updated Nov 05, 2026.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.