

UPort 1000シリーズ

1 - 16ポートRS-232、RS-422/485、およびRS-232/422/485 USB-シリアルコンバータ



機能とメリット

- 最大480 MbpsのUSBデータ伝送速度を実現するHi-Speed USB 2.0
- 高速データ転送最大ボーレート921.6 kbps
- Windows、WinCE、Linuxに対応するドライバーの提供
- 配線が簡単なMini-DB 9メス - ターミナルブロックアダプタ
- USBおよびTxD/RxDのアクティビティを示すLED
- 2 kV絶縁保護（「-I」モデル）

認証



製品紹介

USB-シリアルコンバータUPort® 1000シリーズは、シリアルポートを備えていないラップトップコンピュータやワークステーションコンピュータに最適なアクセサリです。これらは、標準のCOMポートやDB9コネクタを使用せずに、現場で各種シリアルデバイスを接続したり、デバイス用の個別のインターフェースコンバータを接続したりする必要があるエンジニアには不可欠です。

UPort® 1000シリーズは、USBからRS-232/422/485に変換が可能です。すべての製品は従来のシリアルデバイスと互換性があり、計測、POSアプリケーションでも使用することができます。

仕様

USB Interface

Speed	UPort 1100 Series: 12 Mbps UPort 1200/1400/1600 Series: 12 Mbps, 480 Mbps
USB Connector	UPort 1110/1130/1130I/1150: USB Type A UPort 1150I/1200/1400/1600 Series: USB Type B
USB Standards	UPort 1100 Series: USB 1.0/1.1 compliant, USB 2.0 compatible UPort 1200/1400/1600 Series: USB 1.1/2.0 compliant

Serial Interface

No. of Ports	UPort 1100 Series: 1 UPort 1200 Series: 2 UPort 1400 Series: 4 UPort 1600-8 Series: 8 UPort 1600-16 Series: 16
Connector	DB9 male
Baudrate	50 bps to 921.6 kbps
Data Bits	5, 6, 7, 8
Stop Bits	1, 1.5, 2
Parity	None, Even, Odd, Space, Mark
Flow Control	None, RTS/CTS, XON/XOFF

Isolation	UPort 1130I/1150I/1250I/1450I: 2kV
Serial Standards	UPort 1110/1410/1610-8/1610-16: RS-232 UPort 1130/1130I: RS-422, RS-485 UPort 1150/1150I/1250/1250I/1450/1650-8/1650-16: RS-232, RS-422, RS-485

Serial Signals

RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND

Power Parameters

Input Voltage	UPort 1100/1250/1410/1450: 5 VDC ¹ UPort 1250I/1400/1600-8 Series: 12 to 48 VDC UPort 1600-16 Series: 100 to 240 VAC
Input Current	UPort 1110: 30 mA @ 5 VDC UPort 1130: 60 mA @ 5 VDC UPort 1130I: 65 mA @ 5 VDC UPort 1150: 77 mA @ 5 VDC UPort 1150I: 260 mA @ 5 VDC UPort 1250: 360 mA @ 5 VDC UPort 1250I: 200 mA @ 12 VDC UPort 1410/1450: 260 mA @ 12 VDC UPort 1450I: 360 mA @ 12 VDC UPort 1610-8/1650-8: 580 mA @ 12 VDC UPort 1600-16 Series: 220 mA @ 100 VAC

Physical Characteristics

Housing	UPort 1110/1130/1130I/1150: ABS + Polycarbonate UPort 1150I/1200/1400/1600 Series: Metal
Dimensions	UPort 1110/1130/1130I/1150: 37.5 x 20.5 x 60 mm (1.48 x 0.81 x 2.36 in) UPort 1150I: 52 x 80 x 22 mm (2.05 x 3.15 x 0.87 in) UPort 1200 Series: 77 x 26 x 111 mm (3.03 x 1.02 x 4.37 in) UPort 1400 Series: 204 x 30 x 125 mm (8.03 x 1.18 x 4.92 in) UPort 1600-8 Series: 204 x 44 x 125 mm (8.03 x 1.73 x 4.92 in) UPort 1600-16 Series: 440 x 45.5 x 198.1 mm (17.32 x 1.79 x 7.80 in)
Weight	Packaged: UPort 1110/1130/1130I/1150: 200 g (0.44 lb) UPort 1150I: 320 g (0.72 lb) UPort 1250: 370 g (0.82 lb) UPort 1250I: 680 g (1.5 lb) UPort 1400: 1,345 g (2.96 lb) UPort 1600-8: 1,435 g (3.16 lb) UPort 1600-16: 3,485 g (7.68 lb) Product only: UPort 1110/1130/1130I/1150: 65 g (0.14 lb) UPort 1150I: 75 g (0.16 lb) UPort 1250/1250I: 180 g (0.40 lb) UPort 1400: 720 g (1.59 lb) UPort 1600-8: 835 g (1.84 lb) UPort 1600-16: 2,475 g (5.45 lb)

1. UPort 1410/1450 Series: 5 V for USB port power, 12 V for external power adapter

Environmental Limits

Operating Temperature	0 to 55°C (32 to 131°F)
Storage Temperature (package included)	UPort 1100 Series: -20 to 70°C (-4 to 158°F) UPort 1200/1400/1600 Series: -20 to 75°C (-4 to 167°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class 1
EMS	UPort 1100 Series: IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m IEC 61000-4-8 PFMF UPort 1200/1400/1600 Series: IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV IEC 61000-4-5 Surge: Power: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m IEC 61000-4-8 PFMF
Safety	UPort 1250/1250I/1410/1450/1450I/1610-8/1610-16/1650-8/1650-16: UL 60950-1

Declaration

Green Product	RoHS, CRoHS, WEEE
---------------	-------------------

MTBF

Time	UPort 1100 Series: 1,949,025 hrs UPort 1200 Series: 563,179 hrs UPort 1410: 394,441 hrs UPort 1450/1450I: 546,770 hrs UPort 1610-8: 208,413 hrs UPort 1650-8: 186,567 hrs UPort 1610-16: 138,704 hrs UPort 1650-16: 120,001 hrs
Standards	MIL-HDBK-217F Telcordia (Bellcore), GB

Warranty

Warranty Period	5 years
Details	See www.moxa.com/jp/warranty


Package Contents

Device	1 x UPort 1000 Series USB-to-serial converter
Installation Kit	1 x rack-mounting ear (UPort 1600-16 Series)
Cable	1 x USB type A male to USB type B male (UPort 1150I/UPort 1200/1400/1600 Series)
Connectors	1 x Mini DB9F-to-TB (UPort 1130/1150/1250/1450/1650 Series)
Power Supply	1 x power adapter, universal (UPort 1250I/1450/1450I/1600-8) 1 x power cord (UPort 1600-16)
Documentation	1 x quick installation guide 1 x warranty card

寸法


UPort 1110/1130/1130I/1150

単位：mm（インチ）

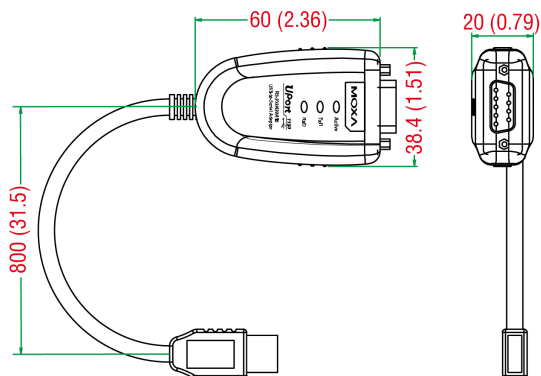


UPort 1150I

単位：mm（インチ）

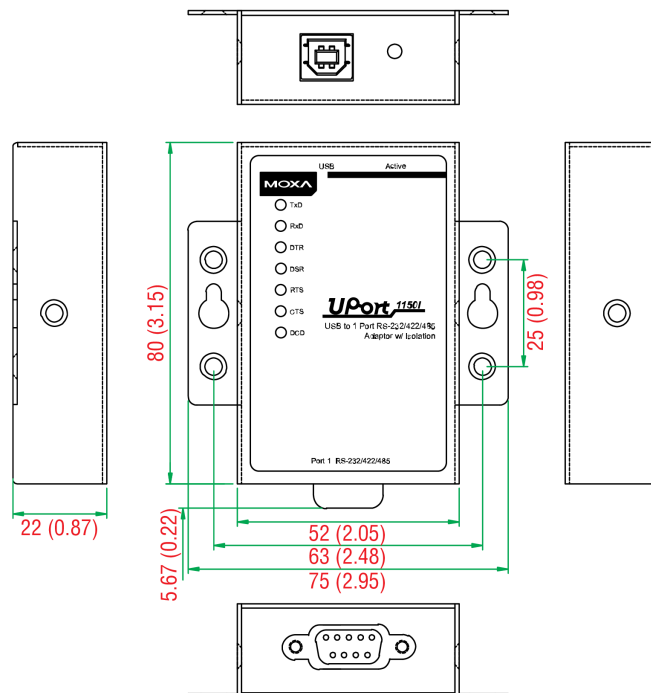


UPort 1250

単位：mm（インチ）

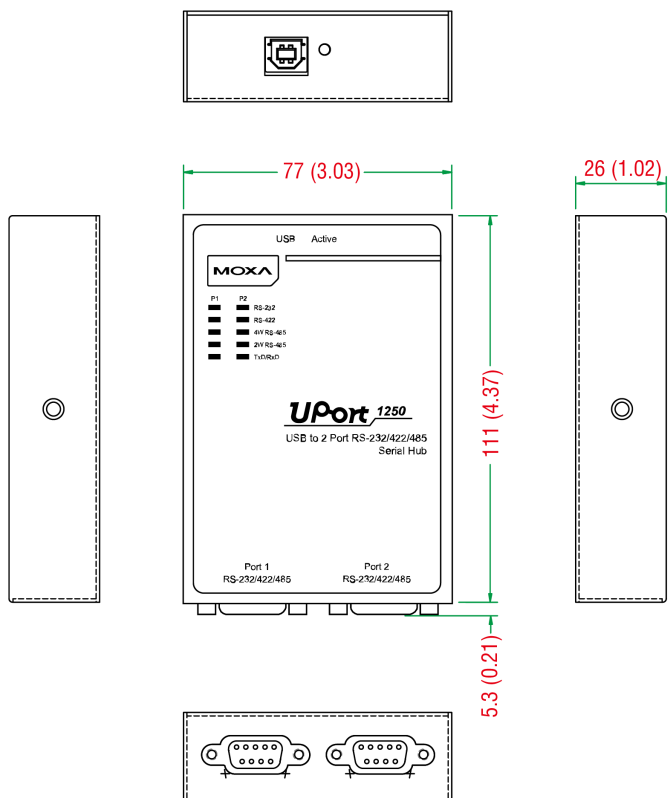


UPort 1250I

単位：mm（インチ）

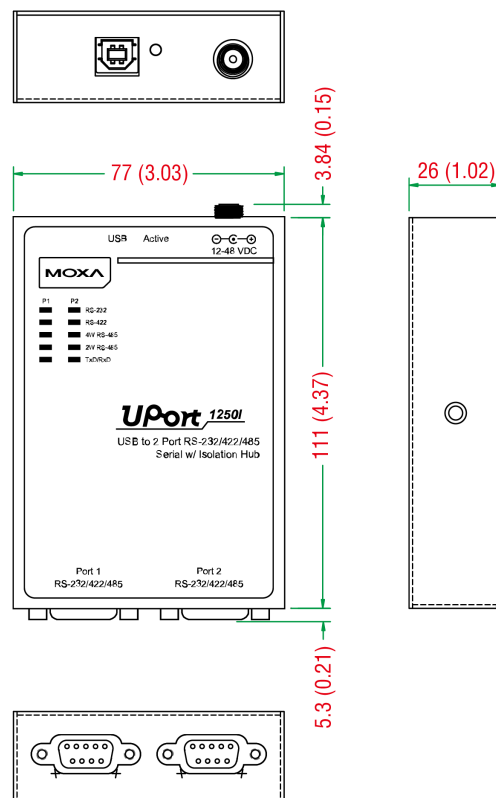


UPort 1410/1450/1450I

単位：mm（インチ）

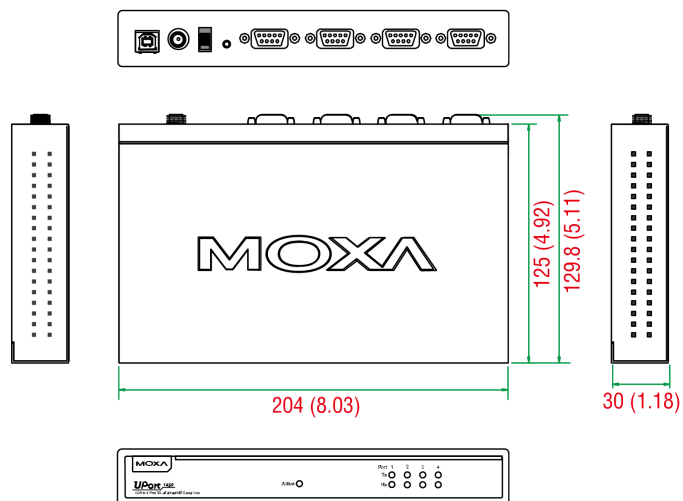


UPort 1610-8/1650-8

単位：mm（インチ）

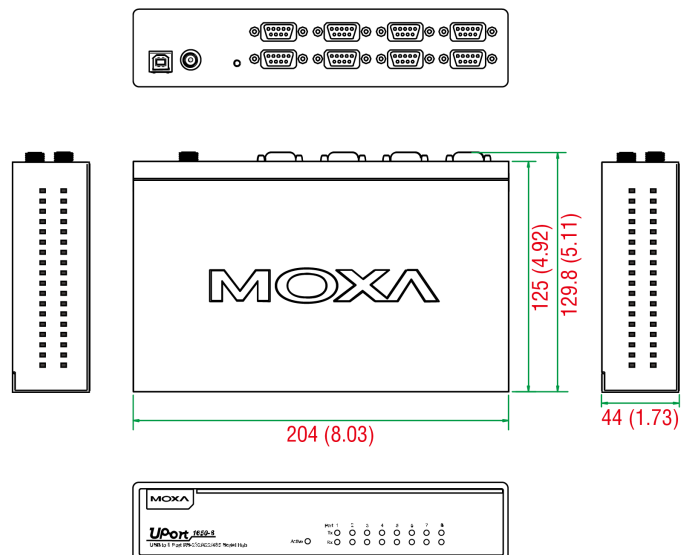

UPort 1610-16/1650-16

単位：mm（インチ）

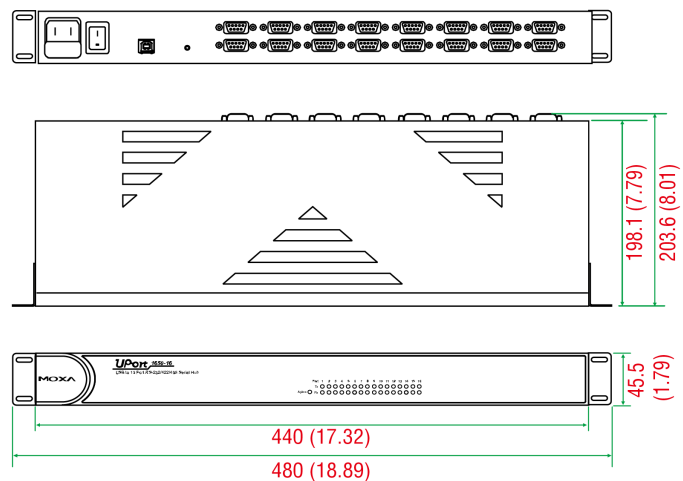

注文情報

Model Name	USB Interface	Serial Standards	No. of Serial Ports	Isolation	Housing Material	Operating Temp.
UPort 1110	USB 1.1	RS-232	1	–	ABS+PC	0 to 55°C
UPort 1130	USB 1.1	RS-422/485	1	–	ABS+PC	0 to 55°C
UPort 1130I	USB 1.1	RS-422/485	1	2 kV	ABS+PC	0 to 55°C
UPort 1150	USB 1.1	RS-232/422/485	1	–	ABS+PC	0 to 55°C
UPort 1150I	USB 1.1	RS-232/422/485	1	2 kV	Metal	0 to 55°C
UPort 1250	USB 2.0	RS-232/422/485	2	–	Metal	0 to 55°C
UPort 1250I	USB 2.0	RS-232/422/485	2	2 kV	Metal	0 to 55°C
UPort 1410	USB 2.0	RS-232	4	–	Metal	0 to 55°C
UPort 1450	USB 2.0	RS-232/422/485	4	–	Metal	0 to 55°C
UPort 1450I	USB 2.0	RS-232/422/485	4	2 kV	Metal	0 to 55°C
UPort 1610-8	USB 2.0	RS-232	8	–	Metal	0 to 55°C
UPort 1650-8	USB 2.0	RS-232/422/485	8	–	Metal	0 to 55°C

Model Name	USB Interface	Serial Standards	No. of Serial Ports	Isolation	Housing Material	Operating Temp.
UPort 1610-16	USB 2.0	RS-232	16	–	Metal	0 to 55°C
UPort 1650-16	USB 2.0	RS-232/422/485	16	–	Metal	0 to 55°C

アクセサリ（別売）

Cables

CN20070	10-pin RJ45 to DB9 female serial cable, 1.5 m Applicable Models: UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8
NP21101	DB25 male to DB9 female cable for RS-232 transmission, 30 cm
CBL-F9M9-20	DB9 female to DB9 male serial cable, 20 cm
CBL-F9M9-150	DB9 female to DB9 male serial cable, 1.5 m
CBL-RJ45SF9-150	RJ45 to DB9 female serial shielded cable, 1.5 m
CBL-USBA/B-100	USB Type A to USB Type B cable, 1 m

Connectors

Mini DB9F-to-TB	DB9 female to terminal block connector
ADP-RJ458P-DB9F	DB9 female to RJ45 connector

Wireless Adapters

A-ADP-RJ458P-DB9F-ABC01	DB9 female to RJ45 connector for the ABC-01
-------------------------	---

DIN-Rail Mounting Kits

DK-UP1200	DIN-rail/wall-mounting kit that includes 2 wall-mounting plates with 6 screws (WK-35-02), and 2 DIN-rail plates with 4 screws (DK35A) Applicable Models: UPort 1250I UPort 1250
DK-UP1400	DIN-rail/wall-mounting kit, 2 plates, 6 screws, and 2 DIN-rail plates, 4 screws Applicable Models: UPort 1410 UPort 1650-8 UPort 1610-8 UPort 1450I UPort 1450

Wall-Mounting Kits

WK-35-01	Wall-mounting kit, 2 plates, 6 screws, 35 x 44 x 2.5 mm
WK-51-01	Wall-mounting kit, 2 plates, 6 screws, 51.6 x 67 x 2 mm Applicable Models: UPort 1250 UPort 1250I

Rack-Mounting Kits

WK-44-01	Wall-mounting kit, 2 L-shaped plates, 6 screws, 44 x 35 x 2.5 mm Applicable Models: UPort 1150I
----------	---

Power Adapters

PWR-12125-DT-S2	Desktop power supply (requires power cord), 12 VDC, 1.25 A, 100-240 VAC, 0 to 40°C operating temperature Applicable Models: UPort 1250 UPort 1250I UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8
-----------------	---

Power Cords

PWC-C13AU-3B-183	Power cord with Australian (AU) plug, 1.83 m Applicable Models: UPort 1610-16 UPort 1650-16
PWC-C13CN-3B-183	Power cord with three-prong China (CN) plug, 1.83 m Applicable Models: UPort 1610-16 UPort 1650-16
PWC-C13EU-3B-183	Power cord with Continental Europe (EU) plug, 1.83 m Applicable Models: UPort 1610-16 UPort 1650-16
PWC-C13JP-3B-183	Power cord with Japan (JP) plug, 7A/125V, 1.83 m Applicable Models: UPort 1610-16 UPort 1650-16
PWC-C13UK-3B-183	Power cord with United Kingdom (UK) plug, 1.83 m Applicable Models: UPort 1610-16 UPort 1650-16
PWC-C13US-3B-183	Power cord with United States (US) plug, 1.83 m Applicable Models: UPort 1610-16 UPort 1650-16
PWC-C7AU-2B-183	Power cord with Australian (AU) plug, 2.5A/250V, 1.83 m Applicable Models: UPort 1250 UPort 1250I UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8
PWC-C7CN-2B-183	Power cord with two-prong China (CN) plug, 1.83 m Applicable Models: UPort 1250 UPort 1250I UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8
PWC-C7EU-2B-183	Power cord with Continental Europe (EU) plug, 2.5A/250V, 1.83 m Applicable Models: UPort 1250 UPort 1250I UPort 1410 UPort 1450 UPort 1450I

	UPort 1610-8 UPort 1650-8
PWC-C7JP-2B-183	Power cord with Japan (JP) plug, 7A/125V, 1.83 m Applicable Models: UPort 1250 UPort 1250I UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8
PWC-C7UK-2B-183	Power cord with United Kingdom (UK) plug, 2.5A/250V, 1.83 m Applicable Models: UPort 1250 UPort 1250I UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8
PWC-C7US-2B-183	Power cord with United States (US) plug, 10A/125V, 1.83 m Applicable Models: UPort 1250 UPort 1250I UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8

© Moxa Inc. All rights reserved. 2019年8月22日更新。

Moxa Inc.の明白な許可を書面で取得しない限り、本書およびその一部の複製や使用はいかなる方法やいかなる場合でも許可されません。製品の仕様は予告なく変更されることがあります。最新の製品情報については当社のWebサイトをご覧ください。