

NPort 6400/6600 系列

4/8/16/32 埠 RS-232/422/485 安全終端伺服器

特色與優點

- LCD 顯示面板，方便設定 IP 位址 (標準溫度型號)
- 安全的 Real COM、TCP Server、TCP Client、Pair Connection、Terminal 和 Reverse Terminal 作業模式
- 支援任何傳輸率，具備高精確度
- 乙太網路離線時，使用連接埠緩衝區儲存串列資料
- 支援 IPv6
- 以網路模組支援乙太網路備援 (STP/RSTP/Turbo Ring)
- 在"Command-by-Command" 模式下支援一般性串列指令
- 符合 IEC 62443 的資安防護功能



認證



簡介

NPort® 6000 使用 SSL 與 SSH 通訊協定加密串列資料，並透過乙太網路傳送。可使用相同 IP 位址多達 32 個串列裝置連接到 NPort® 6000。乙太網路連接埠可針對一般或安全的 TCP/IP 連接進行設定。NPort® 6000 適合在狹小空間內使用大量串列裝置的應用。NPort® 6000 系列透過支援 DES、3DES 和 AES 加密演算法確保數據傳輸的完整性。任何類型的串列裝置均可連接至 NPort® 6600，而且 NPort® 6000 的每個串列埠都可獨立設定為使用 RS-232、RS-422 或 RS-485 傳輸。

乙太網路連線失敗時不會遺失數據

NPort® 6000 以客戶為導向的硬體設計確保機體可靠穩定，並可提供使用者安全的串列轉乙太網路資料傳輸。如果乙太網路中斷，NPort® 6000 會將所有串列資料放入佇列，儲存至其內建的 64 KB 連接埠緩衝區中。當乙太網路重新建立連線後，NPort® 6000 會馬上依照收到資料的順序，將緩衝區內的所有資料釋出。使用者還可安裝 SD 記憶卡來擴充連接埠緩衝區的大小。

LCD 面板使得配置變得容易

NPort® 6600 內建 LCD 面板，可設定及選取作業模式。面板會顯示伺服器名稱、序號及 IP 位址，而且還可輕鬆快速地更新設備連網伺服器的 IP 位址、網路遮罩與閘道位址等任何設定參數。


備註：LCD 面板僅適用於標準溫度型號。



Note: The LCD panel is only available with standard temperature models.

用於 RS-485 通訊的可調整的電阻值

NPort® 6600 為 RS-485 通訊提供可調整的終端、Pull High 與 Pull Low 電阻。在某些嚴苛的環境中，可能需要終端電阻來避免串列訊號的反射，而且需要調整 Pull High 與 Pull Low 電阻來維持電子訊號的完整性。由於沒有任何一組電阻值適合每一個環境，因此 NPort® 6600 可使用內建 DIP 開關手動調整每個串列埠的電阻值。

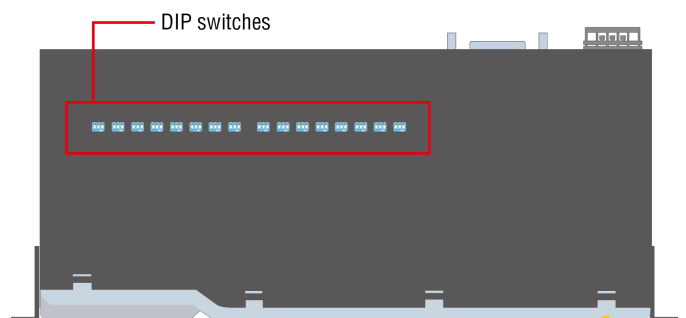

規格

Memory

SD Slot	Up to 32 GB (SD 2.0 compatible)
---------	---------------------------------

Input/Output Interface

Alarm Contact Channels	Resistive load: 1 A @ 24 VDC
------------------------	------------------------------

Ethernet Interface

10/100BaseT(X) Ports (RJ45 connector)	1 Auto MDI/MDI-X connection
Magnetic Isolation Protection	1.5 kV (built-in)

Optical Fiber

		100BaseFX		
		Multi-Mode		Single-Mode
Fiber Cable Type		OM1	50/125 μ m 800 MHz x km	G.652
Typical Distance		4 km	5 km	40 km
Wavelength	Typical (nm)	1300		1310
	TX Range (nm)	1260 to 1360		1280 to 1340
	RX Range (nm)	1100 to 1600		1100 to 1600
Optical Power	TX Range (dBm)	-10 to -20		0 to -5
	RX Range (dBm)	-3 to -32		-3 to -34
	Link Budget (dB)	12		29
	Dispersion Penalty (dB)	3		1

Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.
 Note: Compute the "typical distance" of a specific fiber transceiver as follows: Link budget (dB) > dispersion penalty (dB) + total link loss (dB).

Ethernet Software Features

Configuration Options	Web Console (HTTP/HTTPS), Serial Console, Telnet/SSH Console, Windows Utility
Management	ARP, BOOTP, DHCP Client, DNS, HTTP, ICMP, IPv4/IPv6, PPPOE, SMTP, SNMPv1/v2c/v3, SNTP, TCP/IP, Telnet, UDP
Windows Real COM Drivers	Windows 95/98/ME/NT/2000, Windows XP/2003/Vista/2008/7/8/8.1/10 (x86/x64), Windows 2008 R2/2012/2012 R2 (x64), Windows Embedded CE 5.0/6.0, Windows XP Embedded
Linux Real TTY Drivers	Kernel versions: 2.4.x, 2.6.x, 3.x, 4.x, and 5.x
Fixed TTY Drivers	SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6.x, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X
Android API	Android 3.1.x and later
MIB	MIB-II
Time Management	SNTP Client
Unicast Routing	RIPV1/V2, Static Route
Authentication	Local Account Accessibility, RADIUS, TACACS+

Serial Interface

Connector	NPort 6600 Series: 8-pin RJ45 NPort 6450 Series: DB9 male
No. of Ports	NPort 6450 Series: 4 NPort 6600-8 Series: 8 NPort 6600-16 Series: 16 NPort 6600-32 Series: 32
Serial Standards	NPort 6610 Series: RS-232 NPort 6450/6650 Series: RS-232, RS-422, RS-485
Secure Operation Modes	Reverse SSH, Secure Pair Connection, Secure Real COM, Secure TCP Client, Secure TCP Server, SSH
Standard Operation Modes	Disabled, Ethernet Modem, Pair Connection, PPP, Printer, Real COM, Reverse Telnet, RFC2217, TCP Client, TCP Server, Terminal, UDP
Baudrate	50 bps to 921.6 kbps (supports non-standard baudrates)
Console Port	NPort 6600 Series: RS-232 (TxD, RxD, GND), 8-pin RJ45 (19200, n, 8, 1)
Data Bits	5, 6, 7, 8
Stop Bits	1, 1.5, 2
Parity	None, Even, Odd, Space, Mark
Flow Control	RTS/CTS, DTR/DSR, XON/XOFF
Pull High/Low Resistor for RS-485	NPort 6450 / 6650 Series: 1 kilo-ohm, 150 kilo-ohms
RS-485 Data Direction Control	NPort 6450 / 6650 Series: Supports
Terminator for RS-485	NPort 6450/6650 Series: 120 ohms

Serial Signals

RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND

Power Parameters

Input Current	NPort 6450 Series: 730 mA @ 12 VDC NPort 6600 Series DC Models: 293 mA @ 48 VDC, 200 mA @ 88 VDC AC Models: 140 mA @ 100 VAC (8 ports), 192 mA @ 100 VAC (16 ports), 285 mA @ 100 VAC (32 ports)
Input Voltage	NPort 6450 Series: 12 to 48 VDC NPort 6600 Series AC Models: 100 to 240 VAC DC Models: ±48 VDC (20 to 72 VDC, -20 to -72 VDC), 110 VDC (88 to 300 VDC)

Reliability

Automatic Reboot Trigger	Built-in WDT
Alert Tools	Built-in buzzer and RTC (real-time clock)

Physical Characteristics

Housing	Metal
Dimensions (with ears)	NPort 6450 Series: 181 x 103 x 35 mm (7.13 x 4.06 x 1.38 in) NPort 6600 Series: 480 x 195 x 44 mm (18.9 x 7.68 x 1.73 in)
Dimensions (without ears)	NPort 6450 Series: 158 x 103 x 35 mm (6.22 x 4.06 x 1.38 in) NPort 6600 Series: 440 x 195 x 44 mm (17.32 x 7.68 x 1.73 in)
Weight	NPort 6450 Series: 1,020 g (2.25 lb) NPort 6600-8 Series: 3,460 g (7.63 lb) NPort 6600-16 Series: 3,580 g (7.89 lb) NPort 6600-32 Series: 3,600 g (7.94 lb)
Interactive Interface	LCD panel display (non-T models only) Push buttons for configuration (non-T models only)
Installation	NPort 6450 Series: Desktop, DIN-rail mounting, Wall mounting NPort 6600 Series: Rack mounting (with optional kit)

Environmental Limits

Operating Temperature	Standard Models: 0 to 55°C (32 to 131°F) Wide Temp. Models: -40 to 75°C (-40 to 167°F) High-Voltage Wide Temp. Models: -40 to 85°C (-40 to 185°F)
Storage Temperature (package included)	Standard/Wide Temp. Models: -40 to 75°C (-40 to 167°F) High-Voltage Wide Temp. Models: -40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class A
EMS	<p>NPort 6450 Series:</p> <p>IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 1 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11 DIPs</p> <p>NPort 6600 Series (except -48V/-HV models):</p> <p>IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power 1 kV; Signal 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11 DIPs</p> <p>NPort 6600-48V Series:</p> <p>IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF</p> <p>NPort 6650-HV Series:</p> <p>IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF</p>
Safety	UL 60950-1

Traffic Control	NEMA TS2
Vibration	IEC 60068-2-6
Freefall	IEC 60068-2-34

Declaration

Green Product	RoHS, CRoHS, WEEE
---------------	-------------------

MTBF

Time	NPort 6450 Series: 850,905 hrs NPort 6610-8 Series: 135,891 hrs NPort 6610-16 Series: 102,373 hrs NPort 6610-32 Series: 68,707 hrs NPort 6650-8 Series: 636,600 hrs NPort 6650-16 Series: 439,673 hrs NPort 6650-32 Series: 310,078 hrs NPort 6650-8-HV-T: 501,171 hrs NPort 6650-16-HV-T: 380,006 hrs NPort 6650-32-HV-T: 290,914 hrs
Standards	NPort 6450 Series: Telcordia (Bellcore) Standard TR/SR NPort 6600 Series: Telcordia (Bellcore) Standard

Warranty

Warranty Period	5 years
Details	See www.moxa.com/tw/warranty


Package Contents

Device	1 x NPort 6400/6600 Series terminal server
Installation Kit	2 x rack-mounting ear (NPort 6600 Series)
Cable	1 x DB9 male to RJ45 8-pin (NPort 6600 Series)
Power Supply	1 x power cable, suitable for your region (AC models except -T models) 1 x power adapter, suitable for your region (NPort 6450)
Documentation	1 x quick installation guide 1 x warranty card

尺寸


NPort 6450

單位：公釐（英吋）

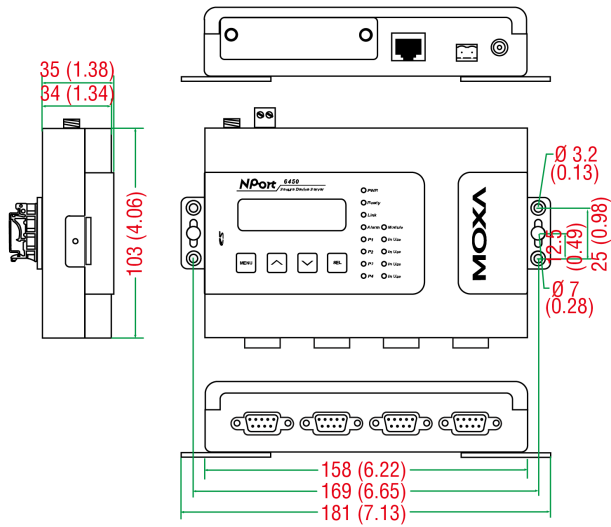

NPort 6600

單位：公釐（英吋）

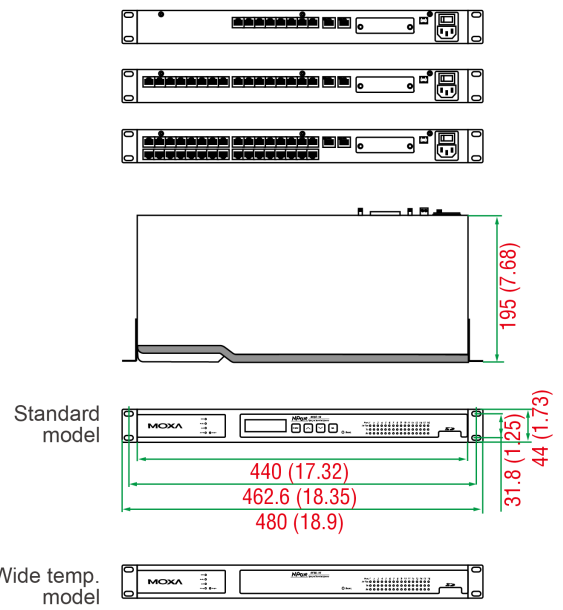

訂購資訊

Model Name	No. of Serial Ports	Serial Standards	Serial Interface	Operating Temp.	Input Voltage
NPort 6450	4	RS-232/422/485	DB9 male	0 to 55°C	12 to 48 VDC
NPort 6450-T	4	RS-232/422/485	DB9 male	-40 to 75°C	12 to 48 VDC
NPort 6610-8	8	RS-232	8-pin RJ45	0 to 55°C	100-240 VAC
NPort 6610-8-48V	8	RS-232	8-pin RJ45	0 to 55°C	48 VDC; +20 to +72 VDC, -20 to -72 VDC
NPort 6610-16	16	RS-232	8-pin RJ45	0 to 55°C	100-240 VAC
NPort 6610-16-48V	16	RS-232	8-pin RJ45	0 to 55°C	48 VDC; +20 to +72 VDC, -20 to -72 VDC
NPort 6610-32	32	RS-232	8-pin RJ45	0 to 55°C	100-240 VAC
NPort 6610-32-48V	32	RS-232	8-pin RJ45	0 to 55°C	48 VDC; +20 to +72 VDC, -20 to -72 VDC
NPort 6650-8	8	RS-232/422/485	8-pin RJ45	0 to 55°C	100-240 VAC
NPort 6650-8-T	8	RS-232/422/485	8-pin RJ45	-40 to 75°C	100-240 VAC
NPort 6650-8-HV-T	8	RS-232/422/485	8-pin RJ45	-40 to 85°C	110 VDC; 88 to 300 VDC
NPort 6650-8-48V	8	RS-232/422/485	8-pin RJ45	0 to 55°C	48 VDC; +20 to +72 VDC, -20 to -72 VDC
NPort 6650-16	16	RS-232/422/485	8-pin RJ45	0 to 55°C	100-240 VAC
NPort 6650-16-48V	16	RS-232/422/485	8-pin RJ45	0 to 55°C	48 VDC; +20 to +72 VDC, -20 to -72 VDC
NPort 6650-16-T	16	RS-232/422/485	8-pin RJ45	-40 to 75°C	100-240 VAC
NPort 6650-16-HV-T	16	RS-232/422/485	8-pin RJ45	-40 to 85°C	110 VDC; 88 to 300 VDC
NPort 6650-32	32	RS-232/422/485	8-pin RJ45	0 to 55°C	100-240 VAC

Model Name	No. of Serial Ports	Serial Standards	Serial Interface	Operating Temp.	Input Voltage
NPort 6650-32-48V	32	RS-232/422/485	8-pin RJ45	0 to 55°C	48 VDC; +20 to +72 VDC, -20 to -72 VDC
NPort 6650-32-HV-T	32	RS-232/422/485	8-pin RJ45	-40 to 85°C	110 VDC; 88 to 300 VDC

配件 (選購)

Cables

CBL-RJ45F25-150	8-pin RJ45 to DB25 female serial cable, 1.5 m Applicable Models: NPort 6650-8-48V NPort 6650-8-HV-T NPort 6650-32-48V NPort 6650-32-HV-T NPort 6650-16-HV-T NPort 6650-16-48V
CBL-RJ45F9-150	8-pin RJ45 to DB9 female serial cable, 1.5m Applicable Models: NPort 6650-16 NPort 6650-8-48V NPort 6610-32-48V NPort 6650-16-48V NPort 6650-16-T NPort 6650-8 NPort 6650-8-HV-T NPort 6610-16 NPort 6650-32-HV-T NPort 6610-8 NPort 6650-32-48V NPort 6650-16-HV-T NPort 6610-32 NPort 6610-16-48V NPort 6610-8-48V NPort 6650-8-T NPort 6650-32
CBL-RJ45M25-150	8-pin RJ45 to DB25 male serial cable, 1.5m Applicable Models: NPort 6650-8 NPort 6650-8-HV-T NPort 6610-16 NPort 6650-8-T NPort 6610-32-48V NPort 6650-16-T NPort 6650-8-48V NPort 6650-16-HV-T NPort 6650-16-48V NPort 6650-16 NPort 6650-32-HV-T NPort 6650-32 NPort 6610-8 NPort 6610-8-48V NPort 6650-32-48V NPort 6610-16-48V NPort 6610-32
CBL-RJ45M9-150	8-pin RJ45 to DB9 male serial cable, 1.5m Applicable Models: NPort 6610-32-48V NPort 6610-8-48V NPort 6650-32 NPort 6650-8 NPort 6650-32-HV-T NPort 6610-16 NPort 6610-8 NPort 6650-8-48V

	<p>NPort 6650-16 NPort 6650-16-HV-T NPort 6610-16-48V NPort 6610-32 NPort 6650-32-48V NPort 6650-8-T NPort 6650-16-T NPort 6650-8-HV-T NPort 6650-16-48V</p>
CBL-RJ45SF25-150	<p>8-pin RJ45 to DB25 female serial cable with shielding, 1.5m</p> <p>Applicable Models: NPort 6610-16 NPort 6610-32-48V NPort 6610-32 NPort 6650-32 NPort 6650-32-48V NPort 6610-8 NPort 6650-16-T NPort 6610-16-48V NPort 6650-32-HV-T NPort 6650-16 NPort 6650-8 NPort 6650-16-48V NPort 6650-16-HV-T NPort 6650-8-T NPort 6610-8-48V NPort 6650-8-48V NPort 6650-8-HV-T</p>
CBL-RJ45SF9-150	<p>8-pin RJ45 to DB25 male serial cable with shielding, 1.5m</p> <p>Applicable Models: NPort 6610-32 NPort 6650-8 NPort 6650-32 NPort 6650-8-HV-T NPort 6650-16-HV-T NPort 6610-8 NPort 6650-16 NPort 6610-16 NPort 6650-16-48V NPort 6650-8-T NPort 6650-8-48V NPort 6650-32-48V NPort 6650-16-T NPort 6610-32-48V NPort 6610-8-48V NPort 6610-16-48V NPort 6650-32-HV-T</p>
CBL-RJ45SM25-150	<p>8-pin RJ45 to DB9 female serial cable with shielding, 1.5m</p> <p>Applicable Models: NPort 6650-8 NPort 6650-8-48V NPort 6610-32-48V NPort 6650-8-T NPort 6650-32-HV-T NPort 6650-32 NPort 6610-16 NPort 6650-16 NPort 6610-8-48V NPort 6650-16-T NPort 6610-8 NPort 6610-16-48V NPort 6650-16-48V NPort 6610-32 NPort 6650-8-HV-T NPort 6650-32-48V NPort 6650-16-HV-T</p>
CBL-RJ45SM9-150	<p>8-pin RJ45 to DB9 male serial cable with shielding, 1.5m</p> <p>Applicable Models: NPort 6610-16</p>

	NPort 6650-32 NPort 6650-8-T NPort 6610-32-48V NPort 6610-16-48V NPort 6650-16-48V NPort 6610-8 NPort 6650-32-HV-T NPort 6610-8-48V NPort 6650-16-HV-T NPort 6650-32-48V NPort 6650-8-HV-T NPort 6650-16-T NPort 6610-32 NPort 6650-8-48V NPort 6650-16 NPort 6650-8
--	---

Connectors

Mini DB9F-to-TB	DB9 female to terminal block connector Applicable Models: NPort 6450 NPort 6450-T
-----------------	--

DIN-Rail Mounting Kits

DK35A	DIN-rail mounting kit, 35 mm Applicable Models: NPort 6450 NPort 6450-T
-------	--

Expansion Modules

NM-TX01	1 10/100BaseTX port
NM-TX01-T	1 10/100BaseTX port, -40 to 75°C operating temperature
NM-TX02	2 10/100BaseTX ports
NM-TX02-T	2 10/100BaseTX ports, -40 to 75°C operating temperature
NM-FX01-M-SC	1 100BaseFX port, multi-mode, SC connector
NM-FX01-M-SC-T	1 100BaseFX port, multi-mode, SC connector, -40 to 75°C operating temperature
NM-FX01-S-SC	1 100BaseFX port, single-mode, SC connector
NM-FX01-S-SC-T	1 100BaseFX port, single-mode, SC connector, -40 to 75°C operating temperature
NM-FX02-M-SC	2 100BaseFX ports, multi-mode, SC connector
NM-FX02-M-SC-T	2 100BaseFX ports, multi-mode, SC connector, -40 to 75°C operating temperature
NM-FX02-S-SC	2 100BaseFX ports, single-mode, SC connector
NM-FX02-S-SC-T	2 100BaseFX ports, single-mode, SC connector, -40 to 75°C operating temperature

Power Adapters

PWR-12125-DT-S2	Desktop power supply (requires power cord), 12 VDC, 1.25 A, 100-240 VAC, 0 to 40°C operating temperature Applicable Models: NPort 6450 NPort 6450-T
PWR-12150-AU-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100-240 VAC, Australia (AU) plug, -40 to 75°C operating temperature Applicable Models: NPort 6450-T NPort 6650-16-HV-T NPort 6650-16-T NPort 6650-32-HV-T NPort 6650-8-HV-T NPort 6650-8-T
PWR-12150-CN-SA-T	Wide-temperature (-40 to 75°C) locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC, China (CN) plug

	<p>Applicable Models: NPort 6450-T NPort 6650-16-HV-T NPort 6650-16-T NPort 6650-32-HV-T NPort 6650-8-HV-T NPort 6650-8-T</p>
PWR-12150-EU-SA-T	<p>Locking barrel plug, 12 VDC, 1.5 A, 100-240 VAC, Continental Europe (EU) plug, -40 to 75°C operating temperature</p> <p>Applicable Models: NPort 6450-T NPort 6650-16-HV-T NPort 6650-16-T NPort 6650-32-HV-T NPort 6650-8-HV-T NPort 6650-8-T</p>
PWR-12150-UK-SA-T	<p>Locking barrel plug, 12 VDC, 1.5 A, 100-240 VAC, United Kingdom (UK) plug, -40 to 75°C operating temperature</p> <p>Applicable Models: NPort 6450-T NPort 6650-16-HV-T NPort 6650-16-T NPort 6650-32-HV-T NPort 6650-8-HV-T NPort 6650-8-T</p>
PWR-12150-USJP-SA-T	<p>Locking barrel plug, 12 VDC 1.5 A, 100-240 VAC, United States/Japan (US/JP) plug, -40 to 75°C operating temperature</p> <p>Applicable Models: NPort 6450-T NPort 6650-16-HV-T NPort 6650-16-T NPort 6650-32-HV-T NPort 6650-8-HV-T NPort 6650-8-T</p>

Power Cords

PWC-C13AU-3B-183	<p>Power cord with Australian (AU) plug, 1.83 m</p> <p>Applicable Models: NPort 6610-16-48V NPort 6650-8-48V NPort 6650-16-HV-T NPort 6610-8-48V NPort 6610-32 NPort 6650-8 NPort 6650-32 NPort 6610-32-48V NPort 6610-8 NPort 6650-8-T NPort 6610-16 NPort 6650-16-48V NPort 6650-8-HV-T NPort 6650-32-48V NPort 6650-32-HV-T NPort 6650-16 NPort 6650-16-T</p>
PWC-C13CN-3B-183	<p>Power cord with three-prong China (CN) plug, 1.83 m</p> <p>Applicable Models: NPort 6650-32 NPort 6650-8-T NPort 6650-8-48V NPort 6650-16 NPort 6650-16-48V NPort 6650-16-T NPort 6610-32 NPort 6650-8-HV-T NPort 6610-16</p>

	<p>NPort 6650-8 NPort 6610-32-48V NPort 6650-16-HV-T NPort 6610-16-48V NPort 6610-8-48V NPort 6650-32-48V NPort 6610-8 NPort 6650-32-HV-T</p>
PWC-C13EU-3B-183	<p>Power cord with Continental Europe (EU) plug, 1.83 m</p> <p>Applicable Models: NPort 6650-8-48V NPort 6650-8-HV-T NPort 6650-32 NPort 6650-16 NPort 6650-16-T NPort 6650-16-HV-T NPort 6610-32 NPort 6650-16-48V NPort 6610-16-48V NPort 6610-8 NPort 6610-8-48V NPort 6650-32-48V NPort 6650-32-HV-T NPort 6650-8 NPort 6610-16 NPort 6610-32-48V NPort 6650-8-T</p>
PWC-C13JP-3B-183	<p>Power cord with Japan (JP) plug, 7A/125V, 1.83 m</p> <p>Applicable Models: NPort 6650-16-T NPort 6650-8 NPort 6610-8 NPort 6650-8-HV-T NPort 6650-32 NPort 6610-8-48V NPort 6650-8-T NPort 6650-16 NPort 6610-16-48V NPort 6610-32-48V NPort 6650-16-HV-T NPort 6650-8-48V NPort 6610-16 NPort 6650-16-48V NPort 6610-32 NPort 6650-32-48V NPort 6650-32-HV-T</p>
PWC-C13UK-3B-183	<p>Power cord with United Kingdom (UK) plug, 1.83 m</p> <p>Applicable Models: NPort 6650-16-HV-T NPort 6650-16 NPort 6610-32 NPort 6610-16 NPort 6610-8-48V NPort 6650-16-T NPort 6610-8 NPort 6610-32-48V NPort 6650-8 NPort 6650-8-T NPort 6650-16-48V NPort 6650-32 NPort 6650-32-HV-T NPort 6650-8-48V NPort 6650-32-48V NPort 6650-8-HV-T NPort 6610-16-48V</p>
PWC-C13US-3B-183	<p>Power cord with United States (US) plug, 1.83 m</p> <p>Applicable Models: NPort 6650-32 NPort 6650-8</p>

	<p>NPort 6650-16 NPort 6610-8 NPort 6650-8-HV-T NPort 6610-32 NPort 6610-8-48V NPort 6610-16 NPort 6610-16-48V NPort 6650-16-48V NPort 6650-8-48V NPort 6650-8-T NPort 6610-32-48V NPort 6650-32-48V NPort 6650-32-HV-T NPort 6650-16-HV-T NPort 6650-16-T</p>
PWC-C7AU-2B-183	<p>Power cord with Australian (AU) plug, 2.5A/250V, 1.83 m</p> <p>Applicable Models: NPort 6450-T NPort 6450</p>
PWC-C7EU-2B-183	<p>Power cord with Continental Europe (EU) plug, 2.5A/250V, 1.83 m</p> <p>Applicable Models: NPort 6450 NPort 6450-T</p>
PWC-C7JP-2B-183	<p>Power cord with Japan (JP) plug, 7A/125V, 1.83 m</p> <p>Applicable Models: NPort 6450-T NPort 6450</p>
PWC-C7UK-2B-183	<p>Power cord with United Kingdom (UK) plug, 2.5A/250V, 1.83 m</p> <p>Applicable Models: NPort 6450-T NPort 6450</p>
PWC-C7US-2B-183	<p>Power cord with United States (US) plug, 10A/125V, 1.83 m</p> <p>Applicable Models: NPort 6450 NPort 6450-T</p>

Power Wiring

CBL-PJ21NOPEN-BK-30	<p>Locking barrel plug to bare-wire cable</p> <p>Applicable Models: NPort 6450</p>
---------------------	---

Rack-Mounting Kits

WK-44-01	<p>Rack-mounting kit, 2 L-shaped plates, 8 screws, 44 x 57.5 x 1.6 mm</p> <p>Applicable Models: NPort 6610-8 NPort 6610-32 NPort 6610-32-48V NPort 6610-16-48V NPort 6610-16 NPort 6610-8-48V NPort 6650-16-T NPort 6650-16-48V NPort 6650-16 NPort 6650-32-HV-T NPort 6650-16-HV-T NPort 6650-8-T NPort 6650-32 NPort 6650-32-48V NPort 6650-8-HV-T NPort 6650-8 NPort 6650-8-48V</p>
----------	---

Wall-Mounting Kits

WK-35-01

Wall-mounting kit, 2 plates, 6 screws

Applicable Models:

NPort 6450-T

NPort 6450

© Moxa Inc. 版權所有.2020 年 2 月 17 日更新。

未經 Moxa Inc. 明確書面許可，不得以任何方式複製或使用本文件及其任何部分。產品規格如有變更，恕不另行通知。請至本公司官網了解最新的產品資訊。