

# TAP-213シリーズ

## 鉄道車両向け 802.11n IP68ワイヤレスAP/クライアント



### 機能と特長

- IEEE 802.11a/b/g/n準拠
- 冗長デュアルDC電源入力またはPoEのいずれかで電力供給可能
- 効率的にネットワークトラフィックを管理するQoS (WMM) およびVLAN
- コントローラベースTurbo Roaming (50ミリ秒未満)<sup>1</sup>
- EN 50155全必須検査項目に準拠<sup>2</sup>
- 堅牢なIP68保護等級の筐体、および -40~75°Cの動作温度
- AeroLink保護によるワイヤレスネットワークの冗長性

### 認証



### 製品紹介

TAP-213屋外用ワイヤレスAP/クライアントは、CCTVおよびCBTC通信などの目的で鉄道車両に搭載され、列車-地上間のアプリケーションに最適な耐久性の高いワイヤレスソリューションを提供します。TAP-213はIP68保護等級の防塵/防水性設計に準拠し、屋外のロケーションやミッションクリティカルな環境にワイヤレスネットワークを展開することができます。2つの冗長DC電源入力は電源供給の信頼性を高め、また、PoE経由でデバイスに電源を供給することができるため導入が容易です。TAP-213はEN 50155規格の必須テスト項目に準拠しており、鉄道車両アプリケーションへの適合性が確保され、多くの強化された産業用グレード機能により、特に鉄道車両内の環境で安定した信頼性の高いワイヤレス接続を提供します。

### 重要な環境に適合

- IP68保護等級の筐体、および-40~75°Cの幅広い動作温度
- 防水/防塵コネクタを備えた防振M12設計
- PoEおよびデュアルDC電力入力
- 高出力400 mW (最大) 無線
- 24~110VDCの広範囲の電源入力
- 3チャンネル/WPA2でクライアントベースのTurbo Roamingハンドオーバータイム150ミリ秒未満
- 3チャンネルとWPA2でコントローラベースのTurbo Roamingハンドオーバータイム50ミリ秒未満 (WAC-1001またはWAC-2004と使用する場合のみ)
- 異なる設置方法とアンテナタイプに対する複数のローミングパラメーター

### 仕様

#### WLAN Interface

Channel Bandwidth	20 MHz, 40 MHz
Frequency Band for EU (20 MHz operating channels)	2.412 to 2.472 GHz (13 channels) 5.180 to 5.240 GHz (4 channels) 5.260 to 5.320 GHz (4 channels) 5.500 to 5.700 GHz (11 channels)
Frequency Band for JP (20 MHz operating channels)	2.412 to 2.484 GHz (14 channels) 5.180 to 5.240 GHz (4 channels) 5.260 to 5.320 GHz (4 channels)

1. Turbo Roaming リカバリータイムは、干渉のない20 MHz RFチャンネル、WPA2-PSKセキュリティ、およびデフォルトのTurbo Roamingパラメータで設定されたAPIに全体にわたり、最適化された条件で記録されたテスト結果の平均です。クライアントは、100 Kbpsのトラフィック負荷で3チャンネルローミングが設定されています。他の条件もまた、ローミング性能に影響を及ぼす可能性があります。Turbo Roamingパラメータ設定の詳細については、製品マニュアルを参照してください。
2. 本製品は、EN 50155規格で定められた鉄道車両アプリケーションに適しています。詳細については、こちらをクリックしてください：[www.moxa.com/doc/specs/EN\\_50155\\_Compliance.pdf](http://www.moxa.com/doc/specs/EN_50155_Compliance.pdf)

	5.500 to 5.700 GHz (11 channels)
Frequency Band for US (20 MHz operating channels)	2.412 to 2.462 GHz (11 channels) 5.180 to 5.240 GHz (4 channels) 5.260 to 5.320 GHz (4 channels) <sup>3</sup> 5.500 to 5.700 GHz (8 channels) Excludes 5.600 to 5.640 <sup>3</sup> 5745 to 5825 GHz (5 channels)
Receiver Sensitivity for 802.11a (measured at 5.680 GHz)	Typ. -90 @ 6 Mbps Typ. -88 @ 9 Mbps Typ. -88 @ 12 Mbps Typ. -85 @ 18 Mbps Typ. -81 @ 24 Mbps Typ. -78 @ 36 Mbps Typ. -74 @ 48 Mbps Typ. -74 @ 54 Mbps Note: Due to a limitation in the receiver sensitivity performance for channels 153 and 161, it is recommended to avoid using these channels in your critical applications.
Receiver Sensitivity for 802.11n (5 GHz; measured at 5.680 GHz)	Typ. -88 dBm @ MCS0 20 MHz Typ. -85 dBm @ MCS1 20 MHz Typ. -82 dBm @ MCS2 20 MHz Typ. -79 dBm @ MCS3 20 MHz Typ. -76 dBm @ MCS4 20 MHz Typ. -71 dBm @ MCS5 20 MHz Typ. -70 dBm @ MCS6 20 MHz Typ. -69 dBm @ MCS7 20 MHz Typ. -95 dBm @ MCS8 20 MHz Typ. -91 dBm @ MCS9 20 MHz Typ. -87 dBm @ MCS10 20 MHz Typ. -80 dBm @ MCS11 20 MHz Typ. -78 dBm @ MCS12 20 MHz Typ. -74 dBm @ MCS13 20 MHz Typ. -72 dBm @ MCS14 20 MHz Typ. -71 dBm @ MCS15 20 MHz Typ. -84 dBm @ MCS0 40 MHz Typ. -81 dBm @ MCS1 40 MHz Typ. -77 dBm @ MCS2 40 MHz Typ. -75 dBm @ MCS3 40 MHz Typ. -71 dBm @ MCS4 40 MHz Typ. -67 dBm @ MCS5 40 MHz Typ. -64 dBm @ MCS6 40 MHz Typ. -63 dBm @ MCS7 40 MHz Typ. -90 dBm @ MCS8 40 MHz Typ. -85 dBm @ MCS9 40 MHz Typ. -82 dBm @ MCS10 40 MHz Typ. -81 dBm @ MCS11 40 MHz Typ. -77 dBm @ MCS12 40 MHz Typ. -73 dBm @ MCS13 40 MHz Typ. -71 dBm @ MCS14 40 MHz Typ. -68 dBm @ MCS15 40 MHz Note: Due to a limitation in the receiver sensitivity performance for channels 153 and 161, it is recommended to avoid using these channels in your critical applications.
Receiver Sensitivity for 802.11b (measured at 2.437 GHz)	Typ. -93 dBm @ 1 Mbps Typ. -93 dBm @ 2 Mbps Typ. -93 dBm @ 5.5 Mbps Typ. -88 dBm @ 11 Mbps
Receiver Sensitivity for 802.11g (measured at 2.437 GHz)	Typ. -90 dBm @ 6 Mbps Typ. -88 dBm @ 9 Mbps Typ. -88 dBm @ 12 Mbps Typ. -85 dBm @ 18 Mbps Typ. -81 dBm @ 24 Mbps Typ. -78 dBm @ 36 Mbps Typ. -74 dBm @ 48 Mbps Typ. -74 dBm @ 54 Mbps
Receiver Sensitivity for 802.11n (2.4 GHz; measured at 2.437 GHz)	Typ. -89 dBm @ MCS0 20 MHz Typ. -85 dBm @ MCS1 20 MHz

3. DFS (Dynamic Frequency Selection) channel support: In AP mode, when a radar signal is detected, the device will automatically switch to another channel. However, according to regulations, after switching channels, a 60-second availability check period is required before starting the service.

	<p>Typ. -85 dBm @ MCS2 20 MHz  Typ. -82 dBm @ MCS3 20 MHz  Typ. -78 dBm @ MCS4 20 MHz  Typ. -74 dBm @ MCS5 20 MHz  Typ. -72 dBm @ MCS6 20 MHz  Typ. -70 dBm @ MCS7 20 MHz  Typ. -95 dBm @ MCS8 20 MHz  Typ. -90 dBm @ MCS9 20 MHz  Typ. -87 dBm @ MCS10 20 MHz  Typ. -83 dBm @ MCS11 20 MHz  Typ. -80 dBm @ MCS12 20 MHz  Typ. -74 dBm @ MCS13 20 MHz  Typ. -71 dBm @ MCS14 20 MHz  Typ. -69 dBm @ MCS15 20 MHz  Typ. -87 dBm @ MCS0 40 MHz  Typ. -83 dBm @ MCS1 40 MHz  Typ. -83 dBm @ MCS2 40 MHz  Typ. -80 dBm @ MCS3 40 MHz  Typ. -76 dBm @ MCS4 40 MHz  Typ. -73 dBm @ MCS5 40 MHz  Typ. -69 dBm @ MCS6 40 MHz  Typ. -67 dBm @ MCS7 40 MHz  Typ. -93 dBm @ MCS8 40 MHz  Typ. -88 dBm @ MCS9 40 MHz  Typ. -85 dBm @ MCS10 40 MHz  Typ. -82 dBm @ MCS11 40 MHz  Typ. -78 dBm @ MCS12 40 MHz  Typ. -73 dBm @ MCS13 40 MHz  Typ. -69 dBm @ MCS14 40 MHz  Typ. -67 dBm @ MCS15 40 MHz</p>
Modulation Type	<p>DSSS  MIMO-OFDM  OFDM</p>
Transmission Rate	<p>802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps  802.11b: 1, 2, 5.5, 11 Mbps  802.11n HT20: 6.5 to 144.4 Mbps (MCS0 to MCS15)  802.11n HT40: 13.5 to 300 Mbps (MCS0 to MCS15)</p>
Transmitter Power for 802.11a	<p>23±1.5 dBm @ 6 Mbps  23±1.5 dBm @ 12 Mbps  23±1.5 dBm @ 24 Mbps  21±1.5 dBm @ 36 Mbps  20±1.5 dBm @ 48 Mbps  18±1.5 dBm @ 54 Mbps</p>
Transmitter Power for 802.11n (5 GHz)	<p>23±1.5 dBm @ MCS0 20 MHz  20±1.5 dBm @ MCS1 20 MHz  20±1.5 dBm @ MCS2 20 MHz  20±1.5 dBm @ MCS3 20 MHz  19±1.5 dBm @ MCS4 20 MHz  18±1.5 dBm @ MCS5 20 MHz  18±1.5 dBm @ MCS6 20 MHz  18±1.5 dBm @ MCS7 20 MHz  23±1.5 dBm @ MCS8 20 MHz  20±1.5 dBm @ MCS9 20 MHz  20±1.5 dBm @ MCS10 20 MHz  20±1.5 dBm @ MCS11 20 MHz  19±1.5 dBm @ MCS12 20 MHz  19±1.5 dBm @ MCS13 20 MHz  18±1.5 dBm @ MCS14 20 MHz  18±1.5 dBm @ MCS15 20 MHz  23±1.5 dBm @ MCS0 40 MHz  20±1.5 dBm @ MCS1 40 MHz  20±1.5 dBm @ MCS2 40 MHz  20±1.5 dBm @ MCS3 40 MHz  19±1.5 dBm @ MCS4 40 MHz  18±1.5 dBm @ MCS5 40 MHz  18±1.5 dBm @ MCS6 40 MHz  18±1.5 dBm @ MCS7 40 MHz  23±1.5 dBm @ MCS8 40 MHz  20±1.5 dBm @ MCS9 40 MHz</p>

	<p>20±1.5 dBm @ MCS10 40 MHz  20±1.5 dBm @ MCS11 40 MHz  19±1.5 dBm @ MCS12 40 MHz  19±1.5 dBm @ MCS13 40 MHz  18±1.5 dBm @ MCS14 40 MHz  18±1.5 dBm @ MCS15 40 MHz</p>
Transmitter Power for 802.11b	<p>26±1.5 dBm @ 1 Mbps  26±1.5 dBm @ 2 Mbps  26±1.5 dBm @ 5.5 Mbps  25±1.5 dBm @ 11 Mbps</p>
Transmitter Power for 802.11g	<p>23±1.5 dBm @ 6 Mbps  23±1.5 dBm @ 12 Mbps  23±1.5 dBm @ 24 Mbps  21±1.5 dBm @ 36 Mbps  20±1.5 dBm @ 48 Mbps  18±1.5 dBm @ 54 Mbps</p>
Transmitter Power for 802.11n (2.4 GHz)	<p>23±1.5 dBm @ MCS0 20 MHz  21±1.5 dBm @ MCS1 20 MHz  21±1.5 dBm @ MCS2 20 MHz  21±1.5 dBm @ MCS3 20 MHz  20±1.5 dBm @ MCS4 20 MHz  19±1.5 dBm @ MCS5 20 MHz  18±1.5 dBm @ MCS6 20 MHz  18±1.5 dBm @ MCS7 20 MHz  23±1.5 dBm @ MCS8 20 MHz  21±1.5 dBm @ MCS9 20 MHz  21±1.5 dBm @ MCS10 20 MHz  21±1.5 dBm @ MCS11 20 MHz  20±1.5 dBm @ MCS12 20 MHz  19±1.5 dBm @ MCS13 20 MHz  18±1.5 dBm @ MCS14 20 MHz  18±1.5 dBm @ MCS15 20 MHz  23±1.5 dBm @ MCS0 40 MHz  20±1.5 dBm @ MCS1 40 MHz  20±1.5 dBm @ MCS2 40 MHz  20±1.5 dBm @ MCS3 40 MHz  19±1.5 dBm @ MCS4 40 MHz  19±1.5 dBm @ MCS5 40 MHz  18±1.5 dBm @ MCS6 40 MHz  17±1.5 dBm @ MCS7 40 MHz  23±1.5 dBm @ MCS8 40 MHz  20±1.5 dBm @ MCS9 40 MHz  20±1.5 dBm @ MCS10 40 MHz  20±1.5 dBm @ MCS11 40 MHz  20±1.5 dBm @ MCS12 40 MHz  19±1.5 dBm @ MCS13 40 MHz  18±1.5 dBm @ MCS14 40 MHz  17±1.5 dBm @ MCS15 40 MHz</p>
Wireless Security	<p>WEP encryption (64-bit and 128-bit)  WPA/WPA2-Enterprise (IEEE 802.1X/RADIUS, TKIP, AES)  WPA/WPA2-Personal</p>
WLAN Antenna Connector	2 N-type female
WLAN Operation Mode	Access point, Client, Client-Router, Sniffer
WLAN Standards	<p>802.11a/b/g/n  802.11i Wireless Security</p>
Frequency Band	<p>2.4 GHz  5 GHz</p>
<b>Input/Output Interface</b>	
Buttons	Reset button

## Ethernet Interface

1000BaseSFP Slots	1
Standards	IEEE 802.1p for Class of Service IEEE 802.1Q for VLAN Tagging IEEE 802.1X for authentication IEEE 802.3 for 10BaseT IEEE 802.3ab for 1000BaseT(X) IEEE 802.3u for 100BaseT(X) IEEE 802.3at for PoE
Total Port Count	2
Highest Speed	1G
Connections	PoE M12 Fiber
10/100/1000BaseT(X) Ports (M12 X-coded 8-pin female connector)	1

## Ethernet Software Features

Management	SNMPv1/v2c/v3, DHCP Server/Client, IPv4, LLDP, SMTP, Syslog, TCP/IP, Telnet, TFTP, UDP, Web Console, Wireless Search Utility
Security	HTTPS/SSL, RADIUS, SSH
Time Management	NTP Client, SNTP
Unicast Routing	Static Route

## Switch Properties

VLAN ID Range	VID 1 to 4094
---------------	---------------

## USB Interface

M12 Connector	M12 A-coded 5-pin female (for ABC-02 USB storage)
---------------	---------------------------------------------------

## Firewall

Filter	IP address, MAC address, Ports
--------	--------------------------------

## NAT

Features	Port forwarding
----------	-----------------

## Serial Interface

Console Port	USB-M12 console (M12 B-coded 5-pin female connector)
Flow Control	RTS/CTS, XON/XOFF
Parity	None, Even, Odd, Space, Mark

## Power Parameters

Input Current	0.65 A @ 24 VDC, 0.16 A @ 110 VDC
Input Voltage	24 to 110 VDC, Redundant dual inputs
Power Connector	M12 A-coded 4-pin male connector
Power Consumption	17.6 W (max.)
Reverse Polarity Protection	Supported
Source of Input Power	PoE (IEEE 802.3at)

## Physical Characteristics

Housing	Metal
IP Rating	IP68
Dimensions (without ears)	220 x 150 x 50.5 mm (8.66 x 5.91 x 1.99 in)
Weight	1,500 g (3.31 lb)
Installation	Wall mounting (standard), DIN-rail mounting (optional), Pole mounting (optional)
Protection	PCB conformal coating

## Environmental Limits

Operating Temperature	-40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

## Standards and Certifications

EMC	EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Radio Frequency	EN 300 328, EN 301 489-1/17, EN 301 893, FCC, IC, WPC
Railway	EN 50121-4, EN 50155
Railway Fire Protection	EN 45545-2
Safety	EN 60950-1, UL 60950-1, IEC 60950-1

## MTBF

Time	758,369 hrs
Standards	Telcordia SR332

## Warranty


Warranty Period	5 years
Details	See <a href="http://www.moxa.com/jp/warranty">www.moxa.com/jp/warranty</a>

## Package Contents

Device	1 x TAP-213 Series wireless AP/client
Installation Kit	1 x cap, metal, for ABC-02 USB storage port 1 x cap, metal, for LAN fiber port 1 x cap, metal, for USB console port 1 x cap, plastic, for LAN X-coded port 1 x metal M12 male 4-pin A-coded screw-type crimp circular connector for power 1 x wall-mounting kit
Antenna	2 x ANT-WDB-ANM-0502 2.4/5 GHz antenna
Documentation	1 x quick installation guide 1 x warranty card

## 寸法

単位：mm（インチ）

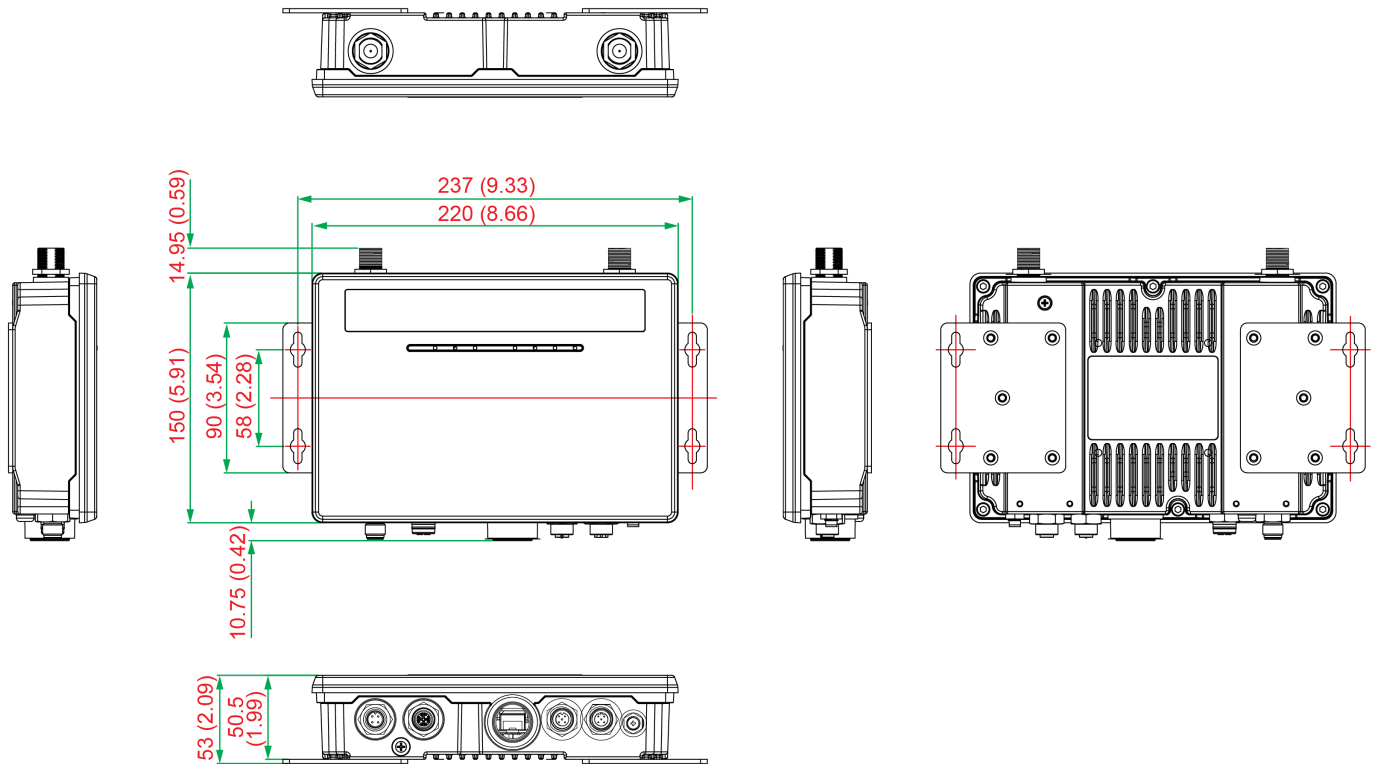

## 注文情報

Model Name	Band	Wi-Fi Standard	Application	Operating Temp.	Indoor/Outdoor, IP Code	Single/Dual RF
TAP-213-EU-CT-T	EU	802.11a/b/g/n	Railway onboard AP/client	-40 to 75°C	Outdoor, IP68	Single RF
TAP-213-US-CT-T	US	802.11a/b/g/n	Railway onboard AP/client	-40 to 75°C	Outdoor, IP68	Single RF
TAP-213-JP-CT-T	JP	802.11a/b/g/n	Railway onboard AP/client	-40 to 75°C	Outdoor, IP68	Single RF

## アクセサリ（別売）

### Antennas

ANT-WDB-ANM-0502	2.4/5 GHz, omni-directional antenna, 5/2 dBi, N-type (male)
ANT-WDB-ARM-02	2.4/5 GHz, omni-directional rubber duck antenna, 2 dBi, RP-SMA (male)
ANT-WDB-PNF-1518	2.4/5 GHz, panel antenna, 15/18 dBi, N-type (female)

### Wireless Antenna Cables

A-CRF-NMNM-LL4-900	N-type (male) to N-type (male) LMR-400 Lite cable, 9 m
A-CRF-NMNM-LL4-300	N-type (male) to N-type (male) LMR-400 Lite cable, 3 m
A-CRF-NMNM-LL4-600	N-type (male) to N-type (male) LMR-400 Lite cable, 6 m

### M12 Connector Caps

A-CAP-M12F-M	Metal cap for M12 female connector
--------------	------------------------------------

### Wireless AP Connector Cables

A-PLG-WPM30IP67-01	Field-Installation for M30 plug
--------------------	---------------------------------

## Wireless Terminating Resistors

A-TRM-50-RM	50-ohm terminating resistor with RP-SMA male connector
-------------	--------------------------------------------------------

## Wireless Connector Caps

A-CAP-M30M-MIP67	Metal cap to cover M30 connector
------------------	----------------------------------

## Surge Arrestors

A-SA-NFNF-01	N-type (female) to N-type (female) surge arrester
--------------	---------------------------------------------------

## Wireless AP Mounting Kits

DK-DC50131-01	DIN-rail mounting kit, 6 screws
---------------	---------------------------------

© Moxa Inc. All rights reserved. 2022年1月28日更新。

Moxa Inc.の明白な許可を written で取得しない限り、本書およびその一部の複製や使用はいかなる方法やいかなる場合でも許可されません。製品の仕様は予告なく変更されることがあります。最新の製品情報については当社のWebサイトをご覧ください。