

WAC-M300 Series

Railway train-to-ground wireless access controllers for the TAP-M310 Series



Features and Benefits

- 2-in-1 AP controller and mobile IP home agent
- Millisecond-level controller-based Turbo Roaming
- IEEE 802.11i compliant wireless security
- Scalable tunneling capacity

Certifications



Introduction

The goal of fast roaming capability is to allow clients to maintain their communications as they move from one access point to another. Moxa’s WAC-M300 Series advanced wireless access controller with controller-based Turbo Roaming technology enables millisecond-level roaming between different IP subnets. The advanced roaming algorithm combined with Mobile IP technology allows seamless roaming while maintaining stringent security in demanding network scenarios. The rugged WAC-M300 Series is rated to operate in temperatures of 0 up to 50°C and suitable for on-site installation in harsh industrial environments..

Maximum Availability

- Device-level redundancy via hot standby controller

Minimum Handover Time

- Millisecond-level Turbo Roaming
- Inter-controller roaming

Specifications

Ethernet Interface

10/100/1000BaseT(X) Ports (RJ45 connector)	2 Port 1: Communications port for WAC/HA Port 2: Reserved
Standards	IEEE 802.11i for Wireless Security IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) IEEE 802.3ab for 1000BaseT(X) IEEE 802.1X for authentication

Ethernet Software Features

Management	IPv4 SNMPv1/v2c/v3 TCP/IP Telnet Web Console Wireless Search Utility MXconfig MXview
Security	HTTPS/SSL RADIUS SSH
Time Management	NTP Client SNTP

Serial Interface

Console Port	RS-232 ports x 1 (DB9 male)
Flow Control	RTS/CTS, XON/XOFF
Parity	None, Even, Odd, Space, Mark

Serial Signals

RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
--------	--

Wireless Access Control

Controller Failover Mode	1-on-1 hot backup
Handover Time	50 ms
Roaming Support	Turbo Roaming (L2) with inter-controller capabilities
WLAN Products Supported	Layer 2 networks: Up to 190 clients roaming between 400 APs

Supported Devices

TAP Products	TAP-M310R Series
--------------	------------------

Power Parameters

Input Current	1.2 A @ 100 VAC
Input Voltage	100 to 240 VAC
No. of Power Inputs	2
Operating Voltage	100 to 240 VAC

Physical Characteristics

Housing	Metal
Dimensions (without ears)	304 x 440 x 44 mm (11.97 x 17.32 x 1.73 in)
Weight	5,480 g (12.08 lb)
Installation	19-inch rack mounting

Environmental Limits

Operating Temperature	0 to 50°C (32 to 122°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

Safety	UL 62368-1 EN 62368-1 IEC 62368-1
EMC	EN 55032/35 EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1000 MHz: 20 V/m IEC 61000-4-3 RS: 1400 MHz to 2000 MHz: 10 V/m IEC 61000-4-3 RS: 2000 MHz to 2700 MHz: 5 V/m IEC 61000-4-3 RS: 5100 MHz to 6000 MHz: 3 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF: 100 A/m

Declaration

Green Product	RoHS, CRoHS, WEEE
---------------	-------------------

MTBF

Time	770,346 hrs
Standards	Telcordia Standard SR-332

Warranty


Warranty Period	5 years
Details	See www.moxa.com/warranty

Package Contents

Device	1 x WAC-M300 Series wireless access controller
Installation Kit	2 x cap, plastic, for RJ45 port 1 x rack-mounting kit
Cable	1 x DB9 female to RJ45
Power Supply	2 x AC power cords, C13-type, US and EU type
Documentation	1 x quick installation guide 1 x warranty card

Dimensions

Unit: mm (inch)

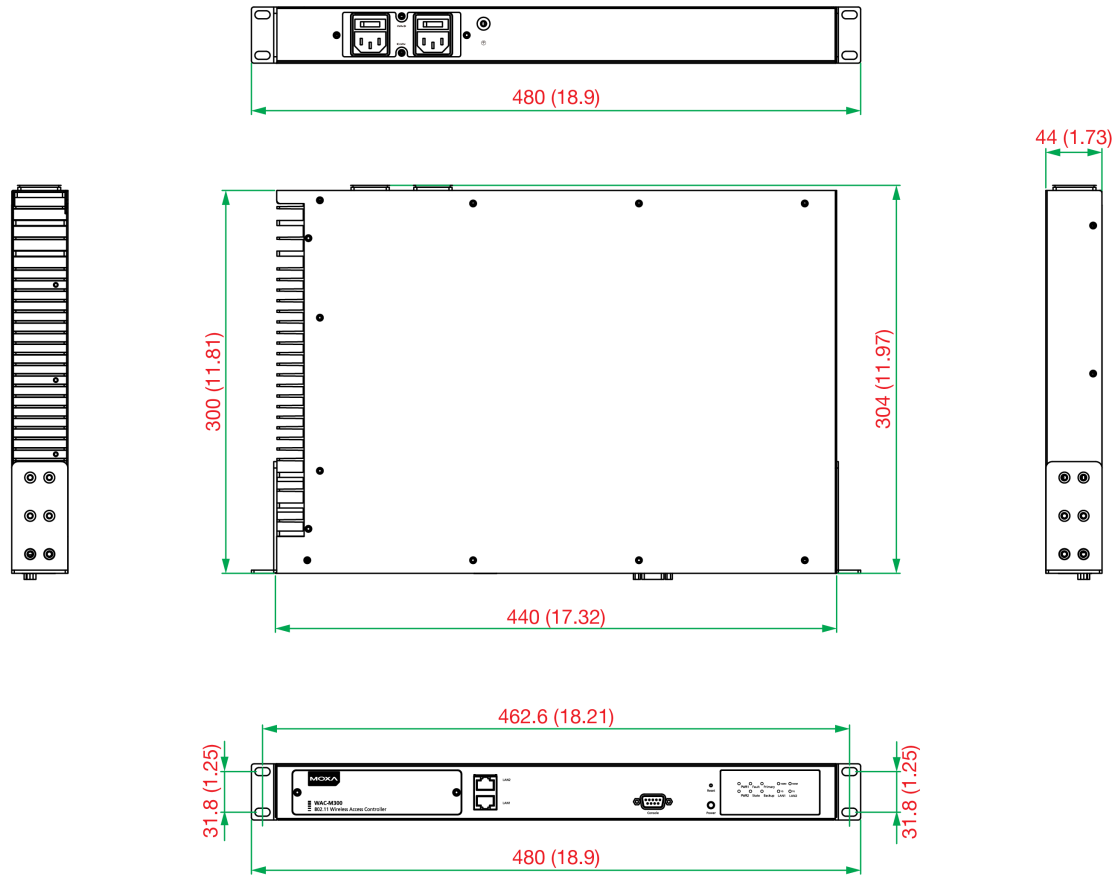

Ordering Information

Model Name	Application	Operating Temp.
WAC-M300	Industrial wireless access controller	0 to 50°C

© Moxa Inc. All rights reserved. Updated Jul 15, 2025.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.