

OnCell 3120-LTE-1 Series

Industrial LTE Cat. 1 cellular gateways



Features and Benefits

- Low power consumption (40 mW in standby)
- GuaranLink for reliable cellular connectivity
- Dual cellular operator backup with dual-SIM
- Cellular WAN and Ethernet WAN backup mechanism for a complete path redundancy
- Rugged hardware design well suited for hazardous locations (ATEX Zone 2/ IECEx)
- VPN secure connection capability with IPsec, GRE, and OpenVPN protocols

Certifications



Introduction

The OnCell 3120-LTE-1 Series is a set of reliable, secure, low power consumption LTE gateways with state-of-the-art global LTE Cat 1 coverage. These LTE cellular gateways provide reliable connections from remote serial and Ethernet devices to a cellular network so that your applications can be easily implemented for IIoT remote-access scenarios. With its efficient power saving features, the OnCell 3120-LTE-1 Series lowers power consumption to less than 40 mW when in standby mode which can be managed using schedules. To enhance industrial reliability, the OnCell 3120-LTE-1 features GuaranLink to ensure robust cellular connectivity.

Remote Access Gateway with VPN and Network Security

- Secure and reliable VPN support with NAT/OpenVPN/GRE/IPsec functionality
- Cybersecurity features based on IEC 62443-4-2

Industrial-grade Reliability

- Rugged hardware design well suited for hazardous locations (ATEX, C1D2, IECEx)
- GuaranLink for reliable cellular connectivity
- WAN backup between cellular and Ethernet
- -30 to 70°C wide operating temperature
- Low power consumption: Less than 40 mW in standby mode

Specifications

Cellular Interface

Cellular Standards	LTE Cat. 1 HSPA UMTS EDGE GPRS GSM
LTE Data Rate	10 MHz bandwidth: 10.2 Mbps DL, 5.2 Mbps UL
HSPA Data Rates	7.2 Mbps DL, 5.76 Mbps UL
Band Options (EU)	LTE Band 1 (2100 MHz) / LTE Band 3 (1800 MHz) / LTE Band 7 (2600 MHz) / LTE Band 8 (900 MHz) / LTE Band 20 (800 MHz) / LTE Band 28A (700 MHz) UMTS/HSPA 900 MHz / 1800 MHz / 2100 MHz GSM 900 MHz / 1800 MHz
Band Options (AU)	LTE Band 1 (2100 MHz) / LTE Band 3 (1800 MHz) / LTE Band 5 (850 MHz) / LTE Band 8 (900 MHz) / LTE Band 9 (1800 MHz) / LTE Band 18 (850 MHz) / LTE Band 19 (850 MHz) / LTE Band 26 (850 MHz) / LTE Band 28 (700 MHz)

	UMTS/HSPA 2100 MHz / 850 MHz / 800 MHz / 900 MHz
Band Options (US)	LTE Band 2 (1900 MHz) / LTE Band 4 (1700MHz (AWS)) / LTE Band 5 (850 MHz) / LTE Band 12 (700 MHz) / LTE Band 13 (700 MHz) / LTE Band 14 (700 MHz) / LTE Band 66 (1700 MHz) / LTE Band 71 (600 MHz) UMTS/HSPA 1900 MHz / 1700 MHz / 850 MHz
No. of SIMs	2
SIM Format	Nano SIM
Cellular Antenna Connectors	2 SMA female
Ethernet Interface	
10/100BaseT(X) Ports (RJ45 connector)	2
USB Interface	
No. of USB Ports	1
USB Connector	USB Type A
USB Standards	USB 2.0
Serial Interface	
No. of Ports	1
Connector	DB9 male
Serial Standards	RS-232/422/485
Data Bits	5, 6, 7, 8
Stop Bits	1, 1.5, 2
Parity	None, Even, Odd, Space, Mark
Baudrate	75 bps to 921.6 kbps
Console Port	RS-232 (TxD, RxD, GND), 4-pin header output (115200, n, 8, 1)
Serial Signals	
RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND

Ethernet Software Features

Management	GuaranLink DHCP server DDNS ARP Telnet TCP/IP UDP SMTP Remote SMS Control Power Saving Syslog SNMPv1/v2c/v3 Serial Console Telnet Console Web Console Wireless Search Utility
Firewall	Filter: MAC, IP protocol, port-based Access IP list
Security	HTTPS
Time Management	SNTP Client
IPsec VPN	
Authentication	PSK/X.509/RSA
Encryption	DES, 3DES, AES, MD5, SHA-1, DH2, DH5
Concurrent VPN Tunnels	5
NAT	
Features	NAT loopback 1-to-1 N-to-1 Port forwarding
OpenVPN	
OpenVPN	OpenVPN (client and server), Tunnel mode (routing) and TAP mode (bridge)
Encryption	Blowfish CBC, DES CBC, DES-EDE3 CBC, AES-128/192/256 CBC
Concurrent VPN Tunnels	5
Power Parameters	
Input Current	0.8 A (max.)
Input Voltage	9 to 36 VDC
Power Consumption	5 W (typ.)
Power Connector	Terminal block
Reverse Polarity Protection	Supported
Power Button	Reset button
Physical Characteristics	
Housing	Metal
IP Rating	IP30
Dimensions	128.5 x 26 x 89.1 mm (5.06 x 1.02 x 3.51 in)

Weight	550 g (1.22 lb)
Installation	DIN-rail mounting Wall mounting (with optional kit)
Environmental Limits	
Operating Temperature	Standard Models: 0 to 55°C (32 to 131°F) Wide Temp. Models: -30 to 70°C (-22 to 158°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Standards and Certifications	
EMC	EN 55032/35 EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 1 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V; 150 kHz to 80 MHz IEC 61000-4-8: 30 A/m
Freefall	IEC 60068-2-32
Hazardous Locations	ATEX IECEX Class I Division 2
Radio Frequency	PTCRB FCC ID SLE-LE910CXNF
Radio	RCM KC JATE NCC TELEC
Carrier Approvals	Verizon AT&T
Cellular Standards	EN 301511 EN 301908-1 EN 62311(MPE SAR) AS/CA S042 EN 301489-1/-52
Safety	IEC 60950-1 IEC 62368-1 UL 60950-1 UL 62368-1
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6
Green Product	RoHS, CRoHS, WEEE
MTBF	
Time	585,775 hrs
Standards	Telcordia SR332

Warranty


Warranty Period	5 years
Details	See www.moxa.com/warranty

Package Contents

Device	1 x OnCell 3120-LTE-1 Series LTE cellular gateway ¹
Installation Kit	1 x DIN-rail kit
Documentation	1 x quick installation guide 1 x warranty card

Dimensions

Unit: mm (inch)

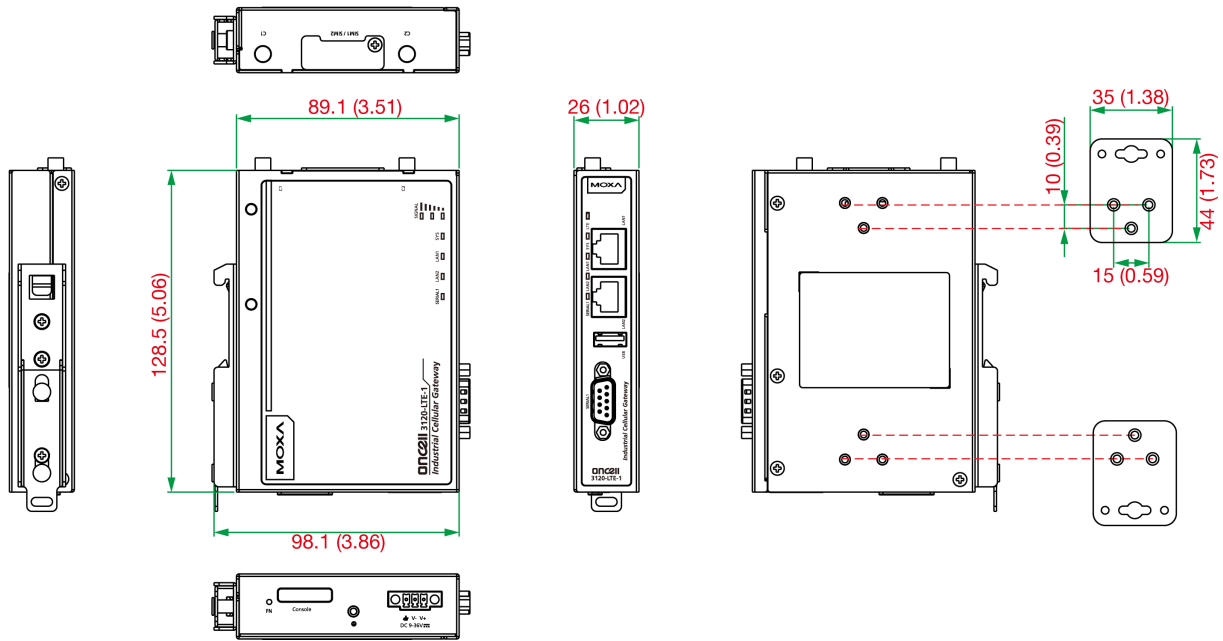

Ordering Information

Model Name	Cellular Standard	LTE Band	Operating Temp.	Mounting
OnCell 3120-LTE-1-EU	LTE Cat 1	B1 (2100 MHz) / B3 (1800 MHz) / B7 (2600 MHz) / B8 (900 MHz) / B20 (800 MHz) / B28A (700 MHz)	-0 to 55°C	Wall, DIN rail
OnCell 3120-LTE-1-EU-T	LTE Cat 1	B1 (2100 MHz) / B3 (1800 MHz) / B7 (2600 MHz) / B8 (900 MHz) / B20 (800 MHz) / B28A (700 MHz)	-30 to 70°C	Wall, DIN rail
OnCell 3120-LTE-1-AU	LTE Cat 1	B1 (2100 MHz) / B3 (1800 MHz) / B5 (850 MHz) / B8 (900 MHz) / B9 (1800 MHz) / B18 (850 MHz) / B19 (850 MHz) / B26 (850 MHz) / B28 (700 MHz)	-0 to 55°C	Wall, DIN rail
OnCell 3120-LTE-1-AU-T	LTE Cat 1	B1 (2100 MHz) / B3 (1800 MHz) / B5 (850 MHz) / B8 (900 MHz) / B9 (1800 MHz) / B18 (850 MHz) / B19 (850 MHz) / B26 (850 MHz) / B28 (700 MHz)	-30 to 70°C	Wall, DIN rail

1. An activated nano SIM card (not included) must be provided by a third party Cellular Service Provider.

Model Name	Cellular Standard	LTE Band	Operating Temp.	Mounting
OnCell 3120-LTE-1-US	LTE Cat 1	B2 (1900 MHz) / B4 (1700 MHz) / B5 (850 MHz) / B12 (700 MHz) / B13 (700 MHz) / B14 (700 MHz) / B66 (1700 MHz) / B71 (600 MHz)	-0 to 55°C	Wall, DIN rail
OnCell 3120-LTE-1-US-T	LTE Cat 1	B2 (1900 MHz) / B4 (1700 MHz) / B5 (850 MHz) / B12 (700 MHz) / B13 (700 MHz) / B14 (700 MHz) / B66 (1700 MHz) / B71 (600 MHz)	-30 to 70°C	Wall, DIN rail

Accessories (sold separately)

Antennas

ANT-LTEUS-ASM-01	GSM/GPRS/EDGE/UMTS/HSPA/LTE, 1 dBi, omnidirectional rubber-duck antenna
ANT-LTE-ASM-02	GPRS/EDGE/UMTS/HSPA/LTE, 2 dBi, omnidirectional rubber-duck antenna

Wireless Antenna Cables

A-CRF-SMSF-R3-100	Wireless antenna cable with SMA (male) to SMA (female) connectors, magnetic base, RG-174 type, 1 m
-------------------	--

Mounting Kits

WK-35-04	Wall-mount kit with 2 plates (35 x 44 x 2.5 mm), 6 screws (FTS x 6 M3 x 4 mm)
----------	---

© Moxa Inc. All rights reserved. Updated Mar 06, 2023.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.