

UC-3400Aシリーズ

ワイヤレス拡張機能を備えたArm Cortex-A53クアッドコア64ビットコンピュータ



機能とメリット

- Armv8 Cortex-A53 1.4 GHzプロセッサ
- デュアルSIMおよびAT&T承認済みの統合型4G LTE Cat.4モジュール
- Wi-Fi 6内蔵
- 自動検出10/100/1000 Mbpsイーサネットポート x 2
- 2 kV絶縁保護を備えたCANポート
- Moxa Industrial Linuxを搭載（10年間の長期サポート付き）
- CE/FCC/UL認証
- Class I Division 2およびATEX Zone 2認証
- IEC 62443-4-2セキュリティレベル2要件に準拠
- 動作温度範囲-40～70°C

認証



製品紹介


MoxaのUC-3400Aシリーズコンピュータは、現場でのデータ前処理と伝送、およびその他の組み込みデータ収集アプリケーション用のエッジゲートウェイとして使用できます。このシリーズには多様なモデルが含まれており、それぞれ異なるワイヤレスオプションとプロトコルをサポートしています。UC-3400Aは高度な放熱設計により、-40～70°Cの温度範囲での使用に適しています。実際、Wi-FiとLTE接続は、低温環境と高温環境の両方で同時に使用できるため、過酷な動作環境におけるアプリケーションのデータ前処理および伝送能力を最大限に発揮できます。

UC-3400Aは、単なるハードウェアソリューションではありません。MoxaのArmベースコンピュータでより良いユーザーエクスペリエンスを提供するために、UC-3400Aには、Moxaが開発した長期サポート付きの高性能産業用LinuxディストリビューションであるMoxa Industrial Linuxが搭載されています。


アプリケーション

- リモートターミナルユニット（RTU）
- データ取得
- M2M通信（スマートゲートウェイ）
- デジタルサイネージ
- ファクトリーオートメーション
- 車載監視/データロガー（交通）
- プログラマブルルータ
- エネルギー使用量の最適化
- 予知保全
- アセット管理


UC-3420A-T-LTE

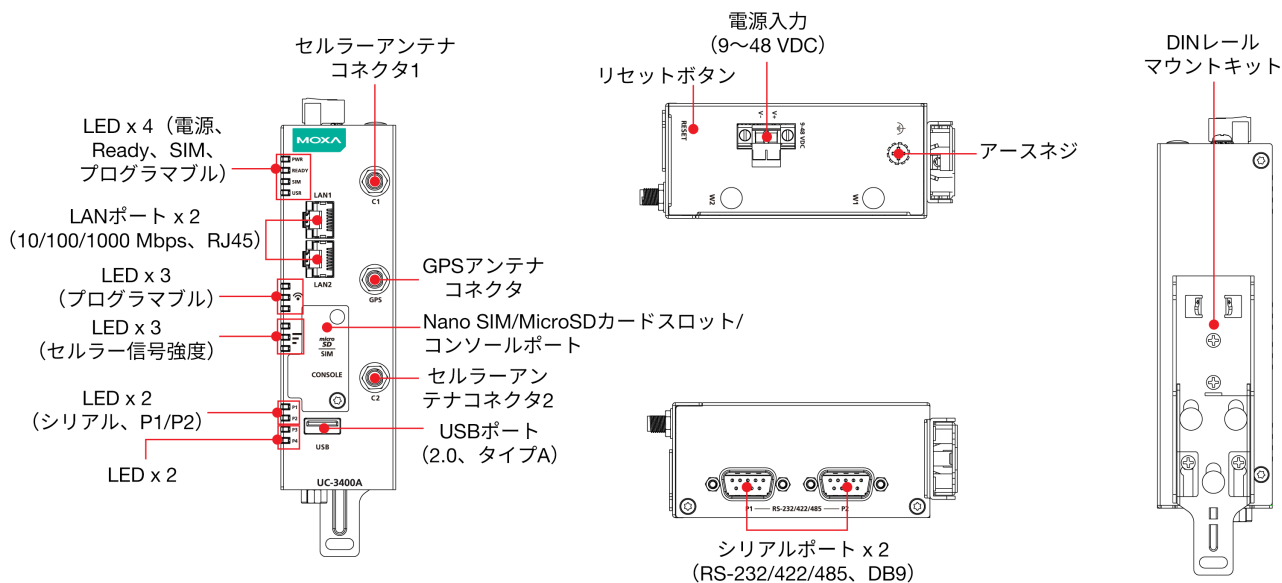


UC-3424A-T-LTE

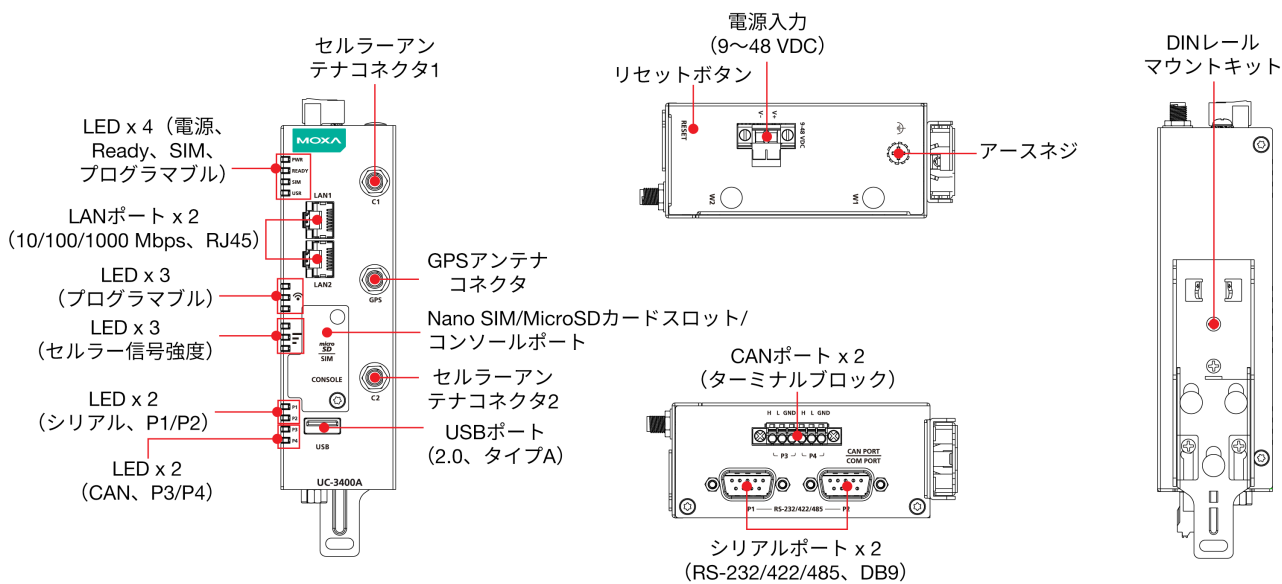

UC-3430A-T-LTE-WiFi

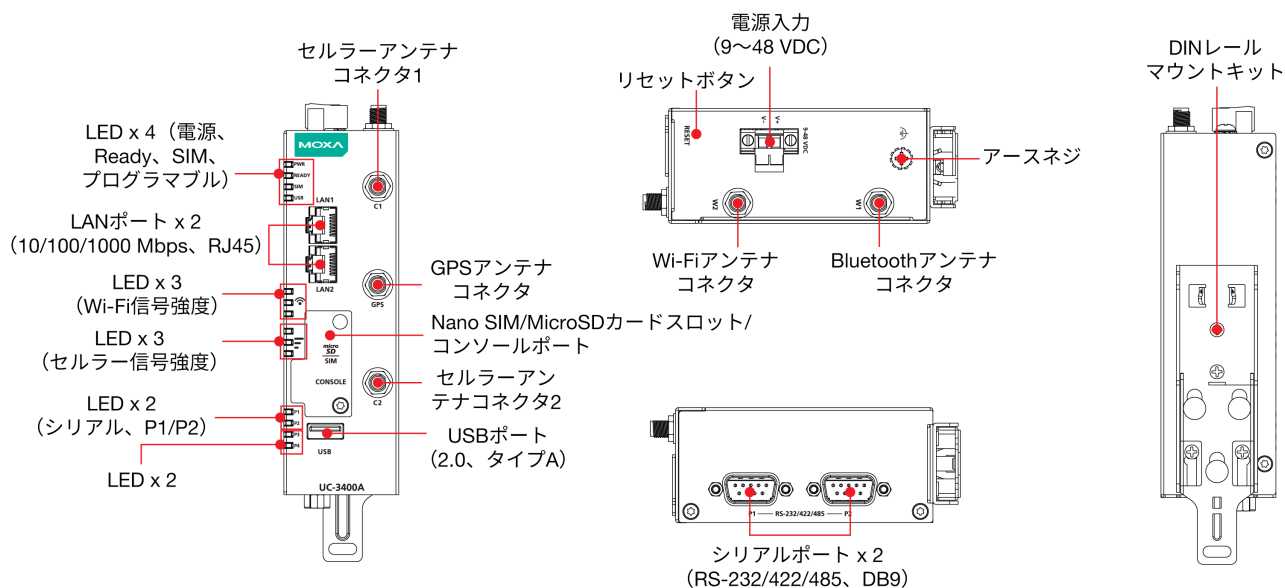

UC-3434A-T-LTE-WiFi

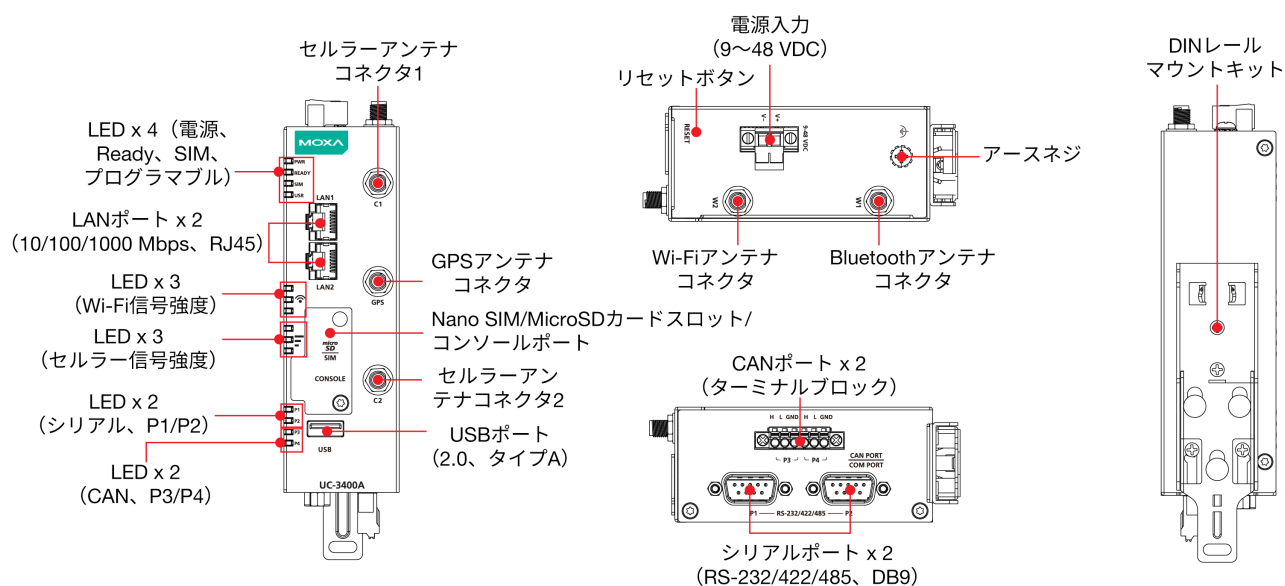

仕様

Computer

CPU	Arm Cortex-A53 quad-core 1.4 GHz
DRAM	4 GB DDR4
Supported OS	Moxa Industrial Linux 3 (Debian 11, kernel 5.10), 2031 EOL See www.moxa.com/MIL
Storage Pre-installed	16 GB eMMC
Expansion Slots	microSD socket x 1

Computer Interface

Ethernet Ports	Auto-sensing 10/100/1000 Mbps ports (RJ45 connector) x 2
Serial Ports	RS-232/422/485 ports x 2 (software-selectable, DB9 male connector)
CAN Ports	UC-3424A-T-LTE, UC-3434A-T-LTE-WiFi: CAN 2.0 A/B x 2 (DB9 male)
USB 2.0	USB 2.0 hosts x 1, type-A connectors
Cellular Antenna Connector	SMA x 2
SIM Format	Nano
Number of SIMs	2
GPS Antenna Connector	SMA x 1
Wi-Fi Antenna Connector	RP-SMA x 2
Console Port	RS-232 (TxD, RxD, GND), 3-pin header output (115200, n, 8, 1)
Bluetooth	UC-3430A-T-LTE-WiFi, UC-3434A-T-LTE-WiFi: v5.3
TPM	TPM v2.0

Ethernet Interface

No. of Ports	2
Magnetic Isolation Protection	1.5 kV (built-in)

Serial Interface

No. of Ports	2
Baudrate	50 bps to 921.60 kbps
Data Bits	5, 6, 7, 8
Stop Bits	1, 1.5, 2
Parity	None, Even, Odd, Space, Mark
Flow Control	RTS/CTS, XON/XOFF ADDC (automatic data direction control) for RS-485

Serial Signals

RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND

CAN Interface

No. of Ports	UC-3424A-T-LTE, UC-3434A-T-LTE-WiFi: 2
Baudrate	10 to 1000 kbps
Industrial Protocols	CAN 2.0A CAN 2.0B
Connector	6-pin terminal block

Isolation	2 kV (built-in)
Signals	CAN_H, CAN_L, CAN_GND, CAN_SHLD, CAN_V+, GND
Cellular Interface	
Band Options	LTE bands: Band 1 (2100 MHz) / Band 2 (1900 MHz) / Band 3 (1800 MHz) / Band 4 (1700 MHz) / Band 5 (850 MHz) / Band 7 (2600 MHz) / Band 8 (700 MHz) / Band 9 (1800 MHz) / Band 12 (700 MHz) / Band 13 (700 MHz) / Band 14 (700 MHz) / Band 18 (850 MHz) / Band 19 (850 MHz) / Band 20 (800 MHz) / Band 25 (1900 MHz) / Band 26 (850 MHz) / Band 28 (700 MHz) 3G bands: Band 1 (2100 MHz) / Band 2 (1900 MHz) / Band 4 (1700 MHz) / Band 5 (850 MHz) / Band 6 (800 MHz) / Band 8 (700 MHz) / Band 19 (850 MHz) 2G bands: Band 2 (1900 MHz) / Band 3 (1800 MHz) / Band 5 (850 MHz) / Band 8 (700 MHz)
GPS Interface	
Receiver Types	GPS/GLONASS/BeiDou/Galileo/QZSS
Accuracy	Position: < 2.0 m @CEP50
Time to First Fix (TTFF)	Hot start: 1.1 s Warm start: 22.1 s Cold start: 29.9 s
Sensitivity	Tracking: -160 dBm Acquisition: -147 dBm Cold starts: -145 dBm
Update Rate	Minimum 1 Hz
WLAN Interface	
WLAN Standards	802.11a/b/g/n/ac/ax
Frequency Band	2.4 GHz / 5 GHz
Security Functions	
Hardware-based Security	TPM 2.0 Hardware Root of Trust Secure Boot
Intrusion Detection	Host-based Intrusion Detection
Security Tools	Security Diagnostic Tool Security Event Auditing Secure Update
Disk Protection	LUKS Disk Encryption
Recovery	One-step recovery to the last known secure state Dual-system design with automatic fallback
Reliability	Network Keep Alive Network Failover and Failback
LED Indicators	
System	Power x 1 READY (device bootup) x 1 SIM card indicator x 1
User Programmable	1
LAN	P1, P2: TX, RX per port (10/100/1000 Mbps)

CAN	UC-3424A-T-LTE/UC-3434A-T-LTE-WiFi: P3, P4: 1 per port for 2 CAN ports
Wireless Signal Strength	UC-3420A-T-LTE, UC-3424A-T-LTE: Cellular x 3 UC-3430A-T-LTE-WiFi, UC-3434-T-LTE-WiFi: Cellular x 3, Wi-Fi x 3

Power Parameters

Input Current	1.09 A @ 9 VDC, 0.21 A @ 48 VDC
Input Voltage	9 to 48 VDC
Power Consumption	10.8 W (max.)

Reliability

Automatic Reboot Trigger	External RTC (real-time clock)
Alert Tools	External WDT (watchdog timer)

Physical Characteristics

Housing	Metal
IP Rating	IP30
Dimensions	130 x 92 x 41 mm (5.12 x 3.62 x 1.61 in)
Weight	Product only: 550 g (1.22 lb)
Installation	DIN-rail mounting Wall mounting (with optional kit)

Environmental Limits

Operating Temperature	-40 to 70°C (-40 to 158°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)


Standards and Certifications

EMC	EN 55032/35 EN 61000-6-2/-6-4 UKCA RCM
EMI	FCC Part 15B Class A ICES-003 Class A EN 55032 Class A EN 61000-6-4 Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 1 kV, Signal: 1 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF: 30 A/m
Cybersecurity	EN 18031-1
Radio Frequency	All models: CE (RED) FCC ISED UKCA RCM NCC

	UC-342x models: TELEC
Safety	EN 62368-1 UL 62368-1
Vibration	IEC 60068-2-64 2 grms @ 5 to 500 Hz, random wave, 1 hr per axis (without USB devices attached)
Shock	IEC 60068-2-27
Carrier Approvals	AT&T Verizon PTCRB
International Approval	CE (RED) FCC ISED UKCA RCM NCC UC-342x models: TELEC
Hazardous Locations	Class I Division 2 ATEX
Green Product	RoHS, CRoHS, WEEE
MTBF	
Time	1,461,405 hrs
Standards	Telcordia (Bellcore) Standard TR/SR
Warranty	
Warranty Period	5 years
Details	See www.moxa.com/jp/warranty
Package Contents	
Device	1 x UC-3400A Series computer
Documentation	1 x quick installation guide 1 x warranty card

寸法

単位：mm（インチ）

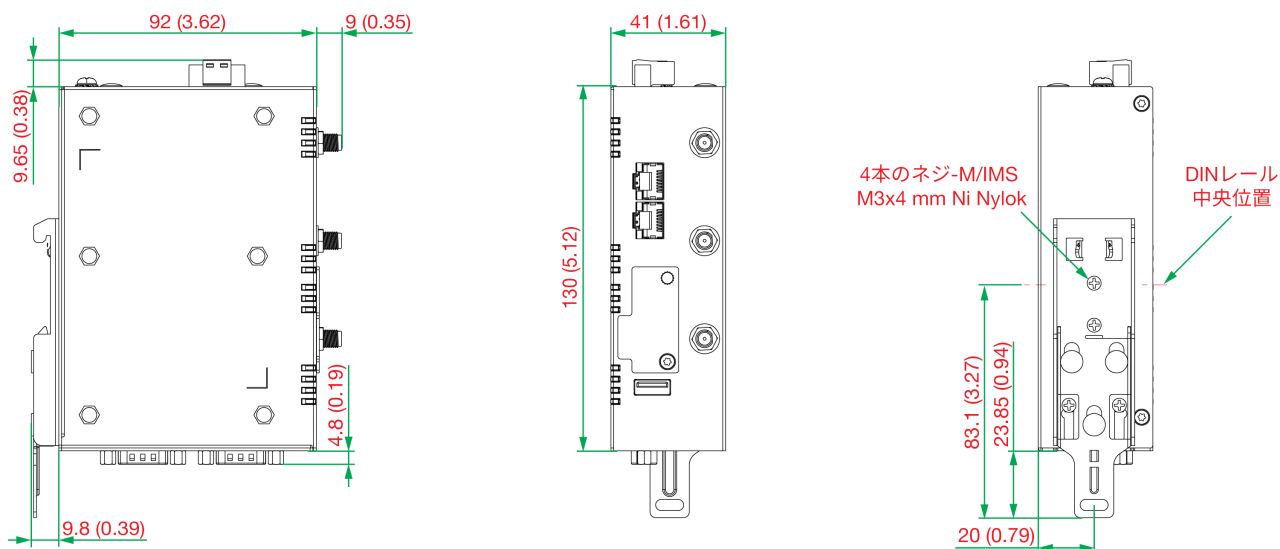

注文情報

Model Name	OS	CPU	CAN	LTE	Wi-Fi
UC-3420A-T-LTE	Default: MIL3 Standard Order MIL3 Secure through UC-3400A (CTO)	Arm Cortex-A53 quad-core 1.4 GHz	-	Cat. 4	-
UC-3424A-T-LTE	Default: MIL3 Standard Order MIL3 Secure through UC-3400A (CTO)	Arm Cortex-A53 quad-core 1.4 GHz	2	Cat. 4	-
UC-3430A-T-LTE-WiFi	Default: MIL3 Standard Order MIL3 Secure through UC-3400A (CTO)	Arm Cortex-A53 quad-core 1.4 GHz	-	Cat. 4	✓
UC-3434A-T-LTE-WiFi	Default: MIL3 Standard Order MIL3 Secure through UC-3400A (CTO)	Arm Cortex-A53 quad-core 1.4 GHz	2	Cat. 4	✓

アクセサリ（別売）

Power Adapters

PWR-12150-CN-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC, CN plug, -40 to 75°C operating temperature
PWR-12150-EU-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC, EU plug, -40 to 75°C operating temperature
PWR-12150-UK-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC, UK plug, -40 to 75°C operating temperature
PWR-12150-AU-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC, AU plug, -40 to 75°C operating temperature
PWR-12150-USJP-SA-T	Locking barrel plug, 12 VDC 1.5 A, 100 to 240 VAC, US/JP plug, -40 to 75°C operating temperature

Cables

CBL-F9DPF1x4-BK-100	Console cable with 4-pin connector, 1 m
---------------------	---

DIN-Rail Mounting Kits

DK-107-01	DIN-rail mounting kit with 1 plate (107 x 29 mm) and 5 M3 x 4 mm screws
-----------	---

Wall-Mounting Kits

WK-71-01	Wall-mounting kit with 2 plates (each 71 x 44.8 x 5.7 mm) and 5 M3 x 5 mm screws
----------	--

Antennas

ANT-5G-OSM-04	4 dBi LTE/5G NR dipole antenna with SMA (male) connector
ANT-LTEUS-ASM-01	GSM/GPRS/EDGE/UMTS/HSPA/LTE, 1 dBi, omnidirectional rubber-duck antenna
ANT-LTEUS-OSM-02	698 to 960/1710 to 2700 MHz, 1/4 λ omnidirectional 1.5 dBi antenna with SMA (male) connector
ANT-WDB6-ARM-05	2 dBi at 2.4 GHz or 2 dBi at 5 GHz or 3 dBi at 6 GHz, tri-band dipole antenna with RP-SMA (female) connector
ANT-WDB-ARM-02	2 dBi at 2.4 GHz or 2 dBi at 5 GHz, RP-SMA (male) omnidirectional rubber-duck antenna
ANT-WDB-ASM-03 BK	2 dBi at 2.4 GHz or 2 dBi at 5 GHz, RP-SMA (male) omnidirectional rubber-duck antenna
ANT-GPS-CSM-04-3m BK	20 dBi at 1575 to 1605 MHz, SMA (male), right-hand circular polarization (RHCP), active GPS antenna, 3-meter cable

© Moxa Inc. All rights reserved. 2025年9月24日更新。

Moxa Inc.の明白な許可を書面で取得しない限り、本書およびその一部の複製や使用はいかなる方法やいかなる場合でも許可されません。製品の仕様は予告なく変更されることがあります。最新の製品情報については当社のWebサイトをご覧ください。