

EDS-309シリーズ

9ポートアンマネージドイーサネットスイッチ



機能とメリット

- 電源障害およびポート切断アラームのためのリレー出力警告
- ブロードキャストストーム防止
- -40～75°Cの広い動作温度範囲（-Tモデル）

認証



製品紹介

EDS-309イーサネットスイッチは、産業用イーサネット接続向けに経済的なソリューションを提供します。これらの9ポートスイッチには、電源障害やポート切断が発生したときにネットワークエンジニアに警告するリレー警告機能が組み込まれています。また、Class 1 Div.2およびATEX Zone 2規格で定義される危険な場所など、過酷な産業環境向けに設計されています。

スイッチは、FCC、UL、およびCE規格に準拠しており、-10～60°Cの標準動作温度範囲、または-40～75°Cの広い動作温度範囲をサポートしています。すべてのスイッチは、100%バーンインテストを受けており、産業用オートメーションの制御アプリケーションの特別なニーズを満たしています。EDS-309スイッチは、DINレールや配電ボックスに簡単に取り付けることができます。

仕様

Input/Output Interface

Alarm Contact Channels	1 relay output with current carrying capacity of 1 A @ 24 VDC
------------------------	---

Ethernet Interface

10/100BaseT(X) Ports (RJ45 connector)	6 Auto negotiation speed Full/Half duplex mode Auto MDI/MDI-X connection
100BaseFX Ports (multi-mode SC connector)	EDS-309-3M-SC Series: 3
100BaseFX Ports (multi-mode ST connector)	EDS-309-3M-ST Series: 3
Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for flow control

Switch Properties

MAC Table Size	1 K
Packet Buffer Size	512 kbits
Processing Type	Store and Forward

DIP Switch Configuration

Ethernet Interface	Port break alarm
--------------------	------------------

Power Parameters

Input Current	0.26 A @ 24 VDC
Connection	1 removable 6-contact terminal block(s)
Operating Voltage	9.6 to 60 VDC
Input Voltage	Redundant dual inputs 12/24/48 VDC
Reverse Polarity Protection	Supported
Overload Current Protection	Supported

Physical Characteristics

Housing	Metal
IP Rating	IP30
Dimensions	53.6 x 135 x 105 mm (2.11 x 5.31 x 4.13 in)
Weight	790 g (1.75 lb)
Installation	DIN-rail mounting Wall mounting (with optional kit)

Environmental Limits

Operating Temperature	Standard Models: -10 to 60°C (14 to 140°F) Wide Temp. Models: -40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

Safety	UL 60950 UL 508 CSA C22.2 No. 60950, EN 62368-1 (LVD)
EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 MHz: 20 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Hazardous Locations	ATEX Class I Division 2
Vibration	IEC 60068-2-6
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Maritime	DNV

MTBF

Time	2,388,799 hrs
Standards	MIL-HDBK-217F

Warranty


Warranty Period	5 years
Details	See www.moxa.com/jp/warranty

Package Contents

Device	1 x EDS-309 Series switch
Installation Kit	4 x cap, plastic, for RJ45 port 3 x cap, plastic, for SC fiber port (-SC models) 3 x cap, plastic, for ST fiber port (-ST models)
Documentation	1 x quick installation guide 1 x warranty card

寸法

単位: mm (インチ)

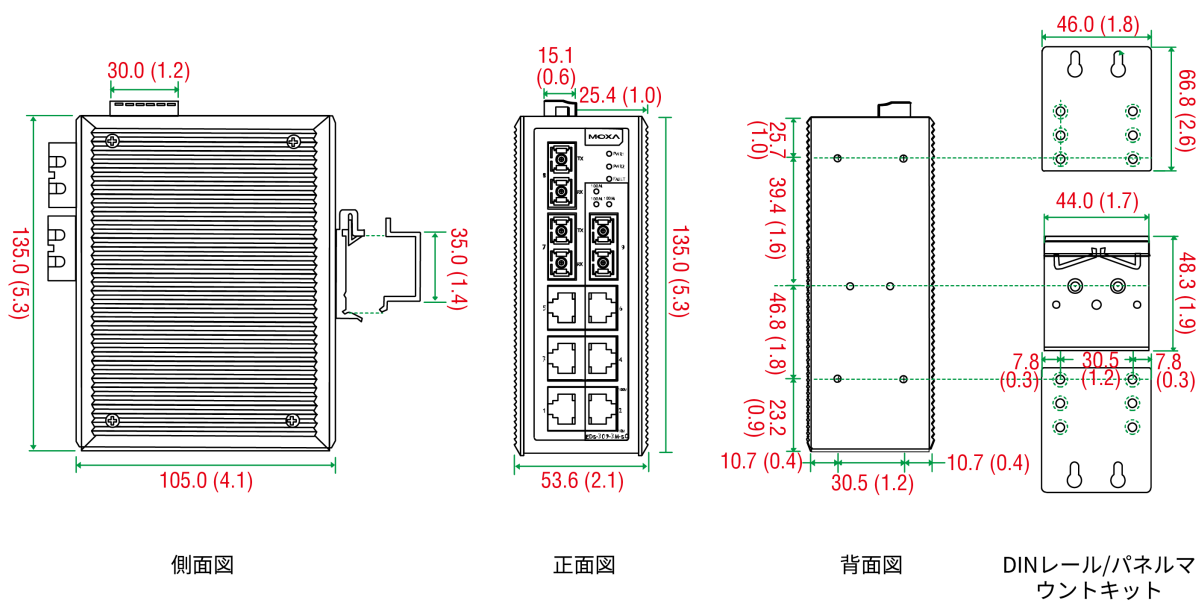

注文情報

Model Name	10/100BaseT(X) Ports RJ45 Connector	100BaseFX Ports Multi-Mode, SC Connector	100BaseFX Ports Multi-Mode, ST Connector	Operating Temp.
EDS-309-3M-SC	6	3	-	-10 to 60°C
EDS-309-3M-SC-T	6	3	-	-40 to 75°C
EDS-309-3M-ST	6	-	3	-10 to 60°C
EDS-309-3M-ST-T	6	-	3	-40 to 75°C

アクセサリ (別売)

Power Supplies

MDR-40-24	DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
MDR-60-24	DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
HDR-60-24	60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature

NDR-120-24	120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature
NDR-120-48	120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature
NDR-240-48	240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature

Wall-Mounting Kits

WK-46	Wall-mounting kit, 2 plates, 8 screws, 46.5 x 66.8 x 1 mm
-------	---

Rack-Mounting Kits

RK-4U	19-inch rack-mounting kit
-------	---------------------------

© Moxa Inc. All rights reserved. 2025年8月26日更新。

Moxa Inc.の明白な許可を written で取得しない限り、本書およびその一部の複製や使用はいかなる方法やいかなる場合でも許可されません。製品の仕様は予告なく変更されることがあります。最新の製品情報については当社のWebサイトをご覧ください。