

EDR-G903 系列

配備防火牆/NAT/VPN 的工業安全路由器



特色與優點

- 一體式防火牆/NAT/VPN/路由器
- 透過 VPN 實現安全遠端存取通道
- 具備狀態檢測功能的防火牆可保護關鍵資產
- 透過 PacketGuard 技術檢查工業通訊協定
- 透過網路位址轉譯 (NAT) 輕鬆設定網路
- 透過公用網路實現的雙 WAN 備援介面
- 在不同的頁面中支援 VLAN
- -40 至 75°C 操作溫度範圍 (-T 型號)

認證



簡介

EDR-G903 是一款具備防火牆/NAT 一體式安全路由器的高效能、工業 VPN 伺服器。其專為關鍵遠端控制或監控網路上的乙太網路安全應用所設計，能為例如泵站、海上鑽油平台上的 DCS、PLC 系統及水處理系統等關鍵網路資產的防護提供電子安全邊界。EDR-G903 系列包括以下網路安全功能：

- 虛擬私人網路 (VPN)：VPN 專為透過公用網際網路存取私人網路時，為使用者提供安全通訊連結所設計。VPN 採用 IPsec (IP 安全性) 伺服器或用戶端模式，在網路層對所有 IP 封包進行加密與驗證，確保機密性與傳送者驗證。
- 防火牆：控制不同信任區之間的網路流量。網路位址轉譯 (NAT) 可屏蔽外部主機的未經授權活動，保護內部 LAN 的安全。

EDR-G903 的快速自動化設定檔功能支援最常見的現場匯流排通訊協定，包括 EtherCAT、EtherNet/IP、FOUNDATION 現場匯流排、Modbus TCP 與 PROFINET。使用者只需按一下滑鼠鍵，即可從易用網頁 UI 輕鬆建立安全乙太網路現場匯流排網路。此外，Moxa 的 PacketGuard 技術 (深度封包檢測) 可協助在 OSI 第 7 層篩選 Modbus TCP 指令。寬溫度範圍型號可在危險的 -40 至 75°C 環境下可靠操作。

規格

Input/Output Interface

Alarm Contact Channels	1 relay output with current carrying capacity of 1 A @ 24 VDC
Buttons	Reset button
Digital Input Channels	+13 to +30 V for state 1 -30 to +3 V for state 0 Max. input current: 8 mA
Relay Channels	1

Ethernet Interface

Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+)	3
Standards	IEEE 802.1Q for VLAN Tagging IEEE 802.3 for 10BaseT IEEE 802.3ab for 1000BaseT(X) IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for flow control IEEE 802.3z for 1000BaseSX/LX/LHX/ZX
WAN Ports, RJ45/Fiber Combo Port	1

DMZ Ports, RJ45/Fiber Combo Port	1
LAN Ports, RJ45/Fiber Combo Port	1
Ethernet Software Features	
Management	Back Pressure Flow Control, DDNS, DHCP Server/Client, HTTP, LLDP, QoS/CoS/ToS, SMTP, SNMPv1/v2c/v3, Telnet, TFTP
Routing	Throughput: 40,000 packets per second (max. 500 Mbps)
Routing Redundancy	VRRP
Security	HTTPS/SSL, SSH, IPsec, OpenVPN (client and server), UDP and TCP Tunnel mode (routing) and TAP mode (bridge), L2TP (server), RADIUS
Time Management	NTP Server/Client, SNTP
Unicast Routing	OSPF, RIPV1/V2, Static Route
Switch Properties	
Max. No. of VLANs	15
DoS and DDoS Protection	
Technology	ARP-Flood, FIN Scan, ICMP-Death, NEWWithout-SYN Scan, NMAP-ID Scan, NMAP-Xmas Scan, Null Scan, SYN/FIN Scan, SYN/RST Scan, SYN-Flood, Xmas Scan
Firewall	
Deep Packet Inspection	Modbus TCP Modbus UDP
Filter	DDoS, Ethernet protocols, ICMP, IP address, MAC address, Ports
Quick Automation Profiles	DNP, EtherCAT, EtherNet/IP, FOUNDATION Fieldbus, FTP, HTTP, IEC 60870-104, IPsec, L2TP, LonWorks, Modbus TCP, PPTP, PROFINET, RADIUS, SSH, Telnet
Stateful Inspection	Router firewall Transparent (bridge) firewall
Throughput	Max. 40000 packets per second (max. 500 Mbps)
IPsec VPN	
Authentication	MD5 and SHA (SHA-256) RSA (key size: 1024-bit, 2048-bit) X.509 v3 certificate
Concurrent VPN Tunnels	Max. 100 IPsec VPN tunnels
Encryption	3DES, AES-128, AES-192, AES-256, DES
Protocols	IPsec, L2TP (server), PPTP (client)
Throughput	Max. 150 Mbps (Conditions: AES-256, SHA-256)
NAT	
Features	1-to-1, N-to-1, Port forwarding
OpenVPN	
Authentication	User password by MD5 and SHA1
Concurrent VPN Tunnels	Client Mode: max. 2 external servers Server Mode: max. 5 external clients

Encryption	AES-128/192/256 CBC, Blowfish CBC, DES CBC, DES-EDE3 CBC
Protocols	OpenVPN (client and server), UDP, and TCP, Tunnel mode (routing) and TAP mode (bridge), Tunnel mode (routing)

Real-Time Firewall / VPN Event Log

Event Type	Firewall event, System event, VPN event
Media	Local storage, SNMP Trap, Syslog server

Serial Interface

Console Port	Web/Telnet/SSH/CLI, and RS-232 serial console
--------------	---

Power Parameters

Connection	Removable terminal block
Input Voltage	12/24/48 VDC
Overload Current Protection	Supported
Reverse Polarity Protection	Supported

Physical Characteristics

Housing	Metal
Dimensions	51.2 x 152 x 131.1 mm (2.02 x 5.98 x 5.16 in)
Weight	1250 g (2.76 lb)
Installation	DIN-rail mounting

Environmental Limits

Operating Temperature	EDR-G903: 0 to 60°C (32 to 140°F) EDR-G903-T: -40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

Freefall	IEC 60068-2-32
EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Safety	UL 508
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6
Power Substation	IEC 61850-3

MTBF

Time	903,311 hrs
Standards	Telcordia (Bellcore), GB

Warranty


Warranty Period	5 years
Details	See www.moxa.com/tw/warranty

Package Contents

Device	1 x EDR-G903 Series secure router
Cable	1 x RJ45-to-DB9 console cable
Documentation	1 x document and software CD 1 x quick installation guide 1 x warranty card
Note	SFP modules need to be purchased separately for use with this product.

尺寸

單位：公釐（英吋）

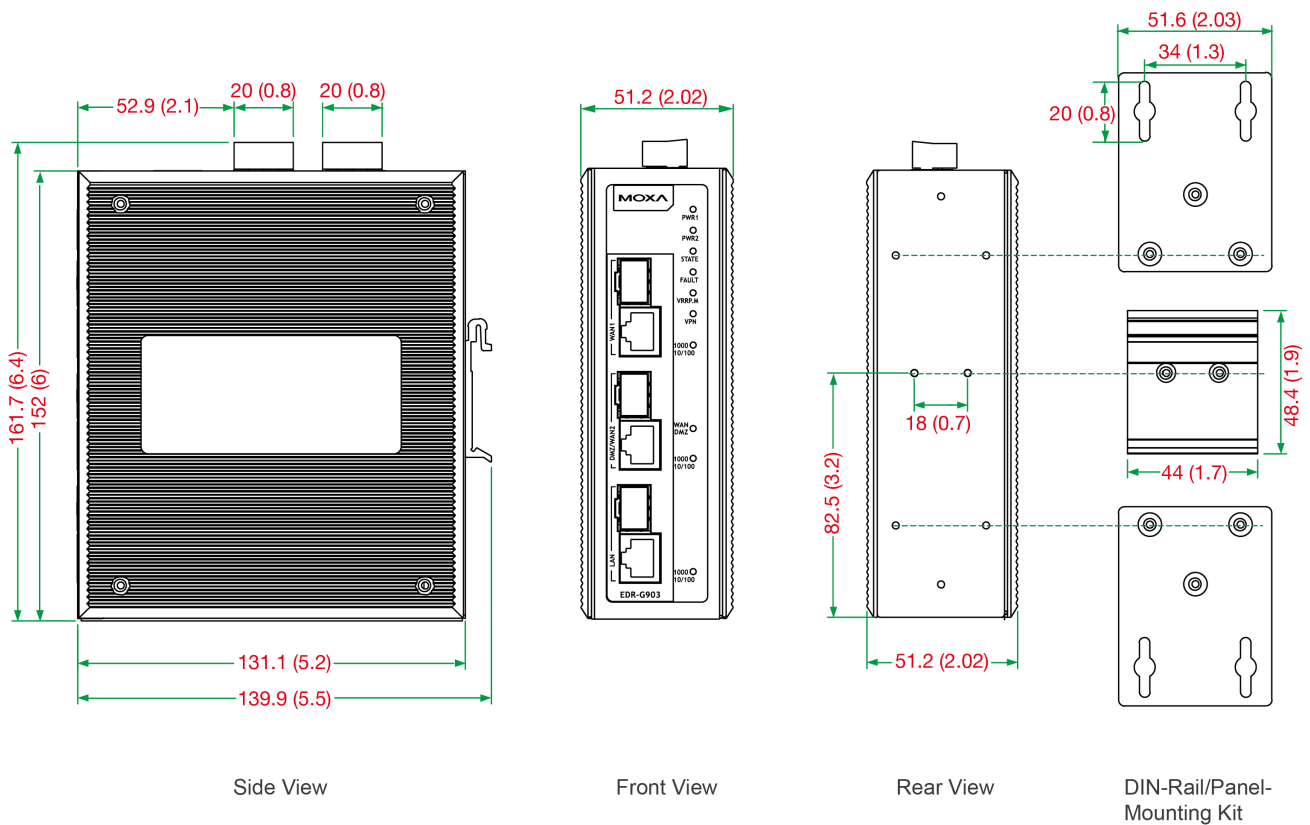

訂購資訊

Model Name	10/100/1000BaseT(X) RJ45 Connector, 100/1000Base SFP Slot Combo WAN Port	10/100/1000BaseT(X) RJ45 Connector, 100/ 1000Base SFP Slot Combo WAN/DMZ Port	Firewall/NAT/VPN	Operating Temp.
EDR-G903	1	1	P	0 to 60°C
EDR-G903-T	1	1	P	-40 to 75°C

配件（選購）

Storage Kits

ABC-01	Configuration backup and restoration tool for managed Ethernet switches and AWK Series wireless APs/bridges/clients, 0 to 60°C operating temperature
--------	--

SFP Modules

SFP-1FELLC-T	SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature
SFP-1FEMLC-T	SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature
SFP-1FESLC-T	SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-1G10ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G10ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G10BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G10BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G20ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G20ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G20BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G20BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G40ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G40ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G40BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G40BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1GEZXLC	SFP module with 1 1000BaseEZX port with LC connector for 110 km transmission, 0 to 60°C operating temperature
SFP-1GEZXLC-120	SFP module with 1 1000BaseEZX port with LC connector for 120 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC-T	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature
SFP-1GLHXLC	SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature
SFP-1GLHXLC-T	SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-1GLSXLC	SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature
SFP-1GLSXLC-T	SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature
SFP-1GLXLC	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature

SFP-1GLXLC-T	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature
SFP-1GSXLC	SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature
SFP-1GSXLC-T	SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature
SFP-1GZXLC	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature
SFP-1GZXLC-T	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature

Power Supplies

DR-120-24	120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature
DR-4524	45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature
DR-75-24	75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature
MDR-40-24	DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
MDR-60-24	DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature

Wall-Mounting Kits

WK-51-01	Wall mounting kit with 2 plates (51.6 x 67 x 2 mm) and 6 screws
----------	---

Rack-Mounting Kits

RK-4U	19-inch rack-mounting kit
-------	---------------------------

Software

MXview-50	Industrial network management software with a license for 50 nodes (by IP address)
MXview-100	Industrial network management software with a license for 100 nodes (by IP address)
MXview-250	Industrial network management software with a license for 250 nodes (by IP address)
MXview-500	Industrial network management software with a license for 500 nodes (by IP address)
MXview-1000	Industrial network management software with a license for 1000 nodes (by IP address)
MXview-2000	Industrial network management software with a license for 2000 nodes (by IP address)
MXview Upgrade-50	License expansion of MXview industrial network management software by 50 nodes (by IP address)

© Moxa Inc. 版權所有.2025 年 6 月 27 日更新。

未經 Moxa Inc. 明確書面許可，不得以任何方式複製或使用本文件及其任何部分。產品規格如有變更，恕不另行通知。請至本公司官網了解最新的產品資訊。