


EPM-3438 Expansion Module

Expansion peripheral modules (EPM) for the V2400 Series

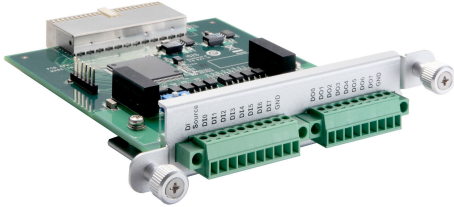

Features and Benefits

- 8 + 8 DI/DO with 3 kV digital isolation protection, 2 kHz counter


Certifications



Introduction

Moxa's EPM-3438 expansion module comes with 8 DIs and 8 DOs provided with 3 kV digital isolation protection and terminal block connectors, which can be used with Moxa's V2426 embedded computers to give end users the best flexibility for setting up and expanding a variety of industrial applications.

Appearance

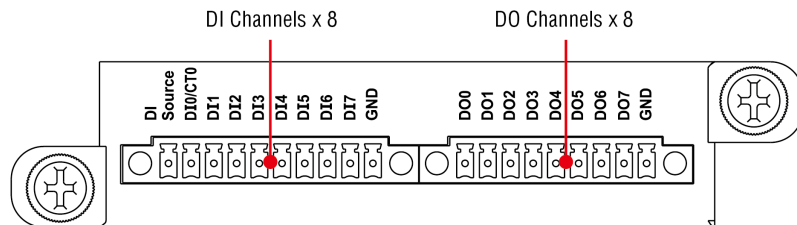

Specifications

Digital Inputs

No. of Ports	DIs x 8
Connector	10-pin terminal block
Voltage	0 to 30 VDC
Dry Contact	On: short to GND Off: open
Wet Contact (DI to COM)	On: 10 to 30 VDC Off: 0 to 3 VDC
Counter Frequency	2 Hz
Isolation	3000 VDC

Digital Outputs

No. of Ports	DOs x 8
Connector	9-pin terminal block
Current Rating	200 mA per channel
Voltage	24 VDC

Physical Characteristics

Dimensions (without ears)	104 x 121 x 34 mm (4.09 x 4.76 x 1.34 in)
Weight	120 g (0.26 lb)

Environmental Limits

Operating Temperature	-40 to 70°C (-40 to 158°F)
-----------------------	----------------------------

Ordering Information

Model Name	miniPCIe Expansion Slots	SIM Slots	RS-232/422/485 Ports	CAN Ports	Digital Input Channels	Digital Output Channels	Operating Temp.	Conformal Coating
EPM-3438	-	-	-	-	8	8	-40 to 70°C	-

© Moxa Inc. All rights reserved. Updated Nov 12, 2018.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.