

UC-2200Aシリーズ

LTE Cat.を内蔵したArm Cortex-A53デュアルコア64ビット1 GHz産業用コンピュータ4つのモジュール、-40～70°Cの動作温度



機能と特長

- Armv8 Cortex-A53 デュアルコア 1 Ghz プロセッサー
- 自動検出10/100/1000 Mbpsイーサネットポート x 2
- 豊富なプログラマブルLEDとプログラマブルボタンにより、設置とメンテナンスを簡素化
- Verizon/AT&T認定および産業用CE/FCC/UL認定を取得したLTE対応コンピュータ
- 動作温度範囲-40～70°C
- Moxa Industrial Linuxを搭載（10年間の超長期サポート付き）
- IEC 62443-4-2セキュリティレベル2要件への準拠

認証




製品紹介

UC-2200Aのコンピューティングプラットフォームは、組み込みデータ収集アプリケーション向けに設計されています。コンピュータは、デュアルRS-232/422/485シリアルポート、デュアル10/100/1000 Mbpsイーサネットポート、および無線モジュールをサポートするためのmini PCIeソケットを装備しています。汎用的な機能を備えており、ユーザーはUC-2200Aを多様な通信ソリューションに効率的に適応させることができます。

UC-2200Aは、エネルギー監視システム向けに最適化されたCortex-A53プロセッサを搭載しながらも、幅広い産業用途に適用可能です。柔軟なインターフェースオプションを備えたこの小型の組み込みコンピュータは、現場サイトでのデータ取得と処理向けに信頼性と安全性の高いゲートウェイを提供し、他の多くの大規模な導入にも有効な通信プラットフォームです。

広温度およびLTE対応モデルも用意されています。広温度対応およびLTE搭載モデルが用意されており、すべての機種は環境試験チャンバーで厳格にテストされているため、過酷な温度条件下でも安心して使用することができます。

外観

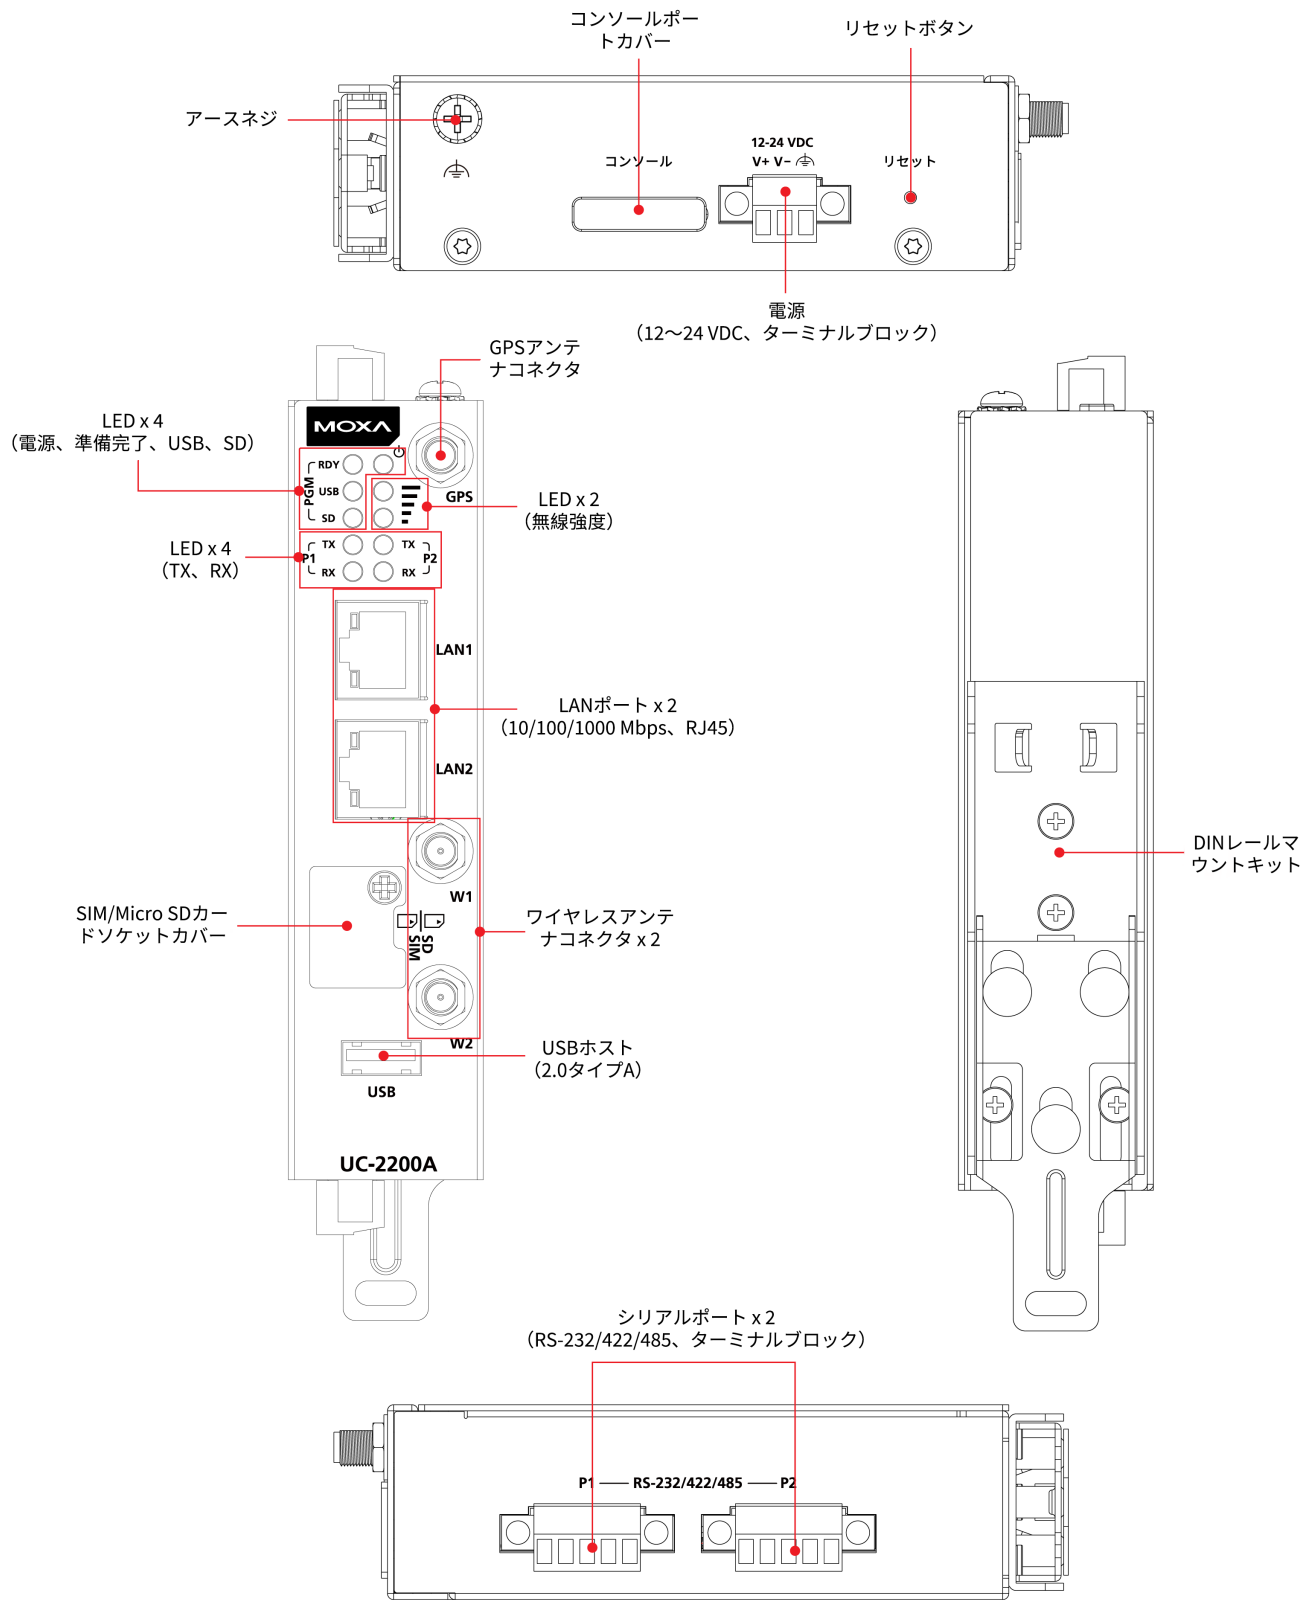

仕様

Computer

CPU	Armv8 Cortex-A53 dual-core 1GHz
DRAM	2 GB DDR4
Pre-installed OS	Moxa Industrial Linux (Debian 11, kernel 5.10), 2031 EOL See www.moxa.com/MIL
Storage Pre-installed	16 GB eMMC
Storage Slot	micro SD slots x 1

Computer Interface

Ethernet Ports	Auto-sensing 10/100/1000 Mbps ports (RJ45 connector) x 2
Serial Ports	RS-232/422/485 ports x 2 (software-selectable, terminal-block connector)
USB 2.0	USB 2.0 hosts x 1, type-A connectors
Console Port	RS-232 (TxD, RxD, GND), 4-pin header output (115200, n, 8, 1)
Expansion Slots	mPCIe slots x 1
Number of SIMs	1
SIM Format	Nano
Buttons	Reset button
TPM	TPM v2.0

Ethernet Interface

Ethernet Ports	Auto-sensing 10/100/1000 Mbps ports (RJ45 connector) x 2
Magnetic Isolation Protection	1.5 kV (built-in)

Serial Interface

Baudrate	300 bps to 921.6 kbps
Data Bits	5, 6, 7, 8
Parity	None, Even, Odd, Space, Mark
Stop Bits	1, 1.5, 2
Flow Control	RTS/CTS XON/XOFF Automatic Data Direction Control (ADDC) for RS-485 RTS Toggle (RS-232 only)

Serial Signals

RS-232	TxD, RxD, RTS, CTS, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND

Cellular Interface

Cellular Standards	LTE Cat. 4
Band Options	UC-2222A-T-US: LTE Band 2 (1900 MHz) / LTE Band 4 (1700 MHz) / LTE Band 5 (850 MHz) / LTE Band 12 (700 MHz) / Band 13 (700 MHz) / Band 14 (700 MHz) / Band 66 (1700 MHz) / Band 71 (600 MHz) UMTS/HSPA B5 (850 MHz) / B4 (1700 MHz) / B2 (1900 MHz) Carrier Approvals: Verizon, AT&T UC-2222A-T-EU: LTE Band 1 (2100 MHz) / LTE Band 3 (1800 MHz) / Band 7 (2600 MHz) / LTE Band 8 (900 MHz) / LTE Band 20 (800 MHz) / LTE Band 28A (700 MHz) UMTS/HSPA B8 (900 MHz) / B3 (1800 MHz) / B1 (2100 MHz) GSM DCS (1800 MHz) / GSM 900 (900 MHz) UC-2222A-T-AP: LTE Band 1 (2100 MHz) / LTE Band 3 (1800 MHz) / LTE Band 5 (850 MHz) / LTE Band 8 (900 MHz) / LTE Band 9 (1800 MHz) / LTE Band 18 (800 MHz) / LTE Band 19 (800 MHz) / LTE Band 26 (850 MHz) / LTE Band 28 (700 MHz) UMTS/HSPA B19 (800 MHz) / B8 (900 MHz) / B6 (850 MHz) / B5 (850 MHz) / B1 (2100 MHz)

GPS Interface

Receiver Types	GPS, GLONASS, BeiDou, Galileo, QZSS
Accuracy	Position: 2.0 m @CEP50
Time to First Fix (TTFF)	Hot start: 1.1 s Warm start: 22.1 s Cold start: 29.9 s
Sensitivity	Acquisition: -147 dBm Cold starts: -145 dBm Tracking: -160 dBm
Update Rate	1 Hz

LED Indicators

System	Power x 1 SW ready (programmable) USB (programmable) x 1 micro SD slot (programmable) x 1 Serial Ports: TX x 2, RX x 2
Wireless Signal Strength	Cellular x 2, programmable Disconnected: None Very Poor Signal: 1 LED (blinking) Poor Signal: 1 LED Good Signal: 2 LEDs

Power Parameters

Input Current	UC-2222A-T: 600 mA @ 12 VDC 300 mA @ 24 VDC UC-2222A-T-US/EU/AP: 900 mA @ 12 VDC 450 mA @ 24 VDC
Input Voltage	12 to 24 VDC
Power Consumption	Models Without Built-in LTE: 4.5 W (without external USB device) 7.2 W (with external USB device attached) Models With Built-in LTE: 7.8 W (without external USB device) 10.5 W (with external USB device)

Reliability

Alert Tools	External RTC (real-time clock)
Automatic Reboot Trigger	External WDT (watchdog timer)

Physical Characteristics

Housing	Metal SECC
IP Rating	IP30
Dimensions	102 x 32 x 128 mm (4.20 x 1.26 x 5.04 in)
Weight	546 g (1.2 lb)
Installation	DIN-rail mounting Wall mounting (with optional kit)

Environmental Limits

Operating Temperature	UC-2222A-T: -40 to 75°C (-40 to 167°F) UC-2222A-T-US/EU/AP (with LTE module): -40 to 70°C (-40 to 158°F)
Storage Temperature	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Shock	IEC 60068-2-27
Vibration	2 Grms @ IEC 60068-2-64, random wave, 5-500 Hz, 1 hr per axis (without USB devices attached)

Standards and Certifications

EMC	EN 55032/35 EN 61000-6-2/-6-4 UKCA RCM KC BSMI
EMI	FCC Part 15B Class A ICES-003 Class A EN 55032 Class A EN 61000-6-4 Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-3 RS: 1.4 GHz to 6 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 1 kV IEC 61000-4-5 L-PE: 1 kV ; L -L: 0.5 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Safety	EN 62368-1 UL 62368-1
Hazardous Locations	ATEX Class I Division 2
International Approval	UKCA RCM FCC CE NCC ISED KC BSMI

Radio Frequency	FCC UC-2222A-T-EU: CE (RED) UC-2222A-T-AP: RCM, NCC
Carrier Approvals	AT&T Verizon PTCRB
Green Product	RoHS, CRoHS, WEEE

MTBF

Time	UC-2222A-T: 924,676 hrs UC-2222A-T-US: 865,122 hrs UC-2222A-T-EU: 866,622 hrs UC-2222A-T-AP: 870,393 hrs
Standards	Telcordia (Bellcore) Standard TR/SR

Warranty


Warranty Period	5 years
Details	See www.moxa.com/jp/warranty

Package Contents

Device	1 x UC-2200A Series computer
Documentation	1 x quick installation guide 1 x warranty card

寸法

単位: mm (インチ)

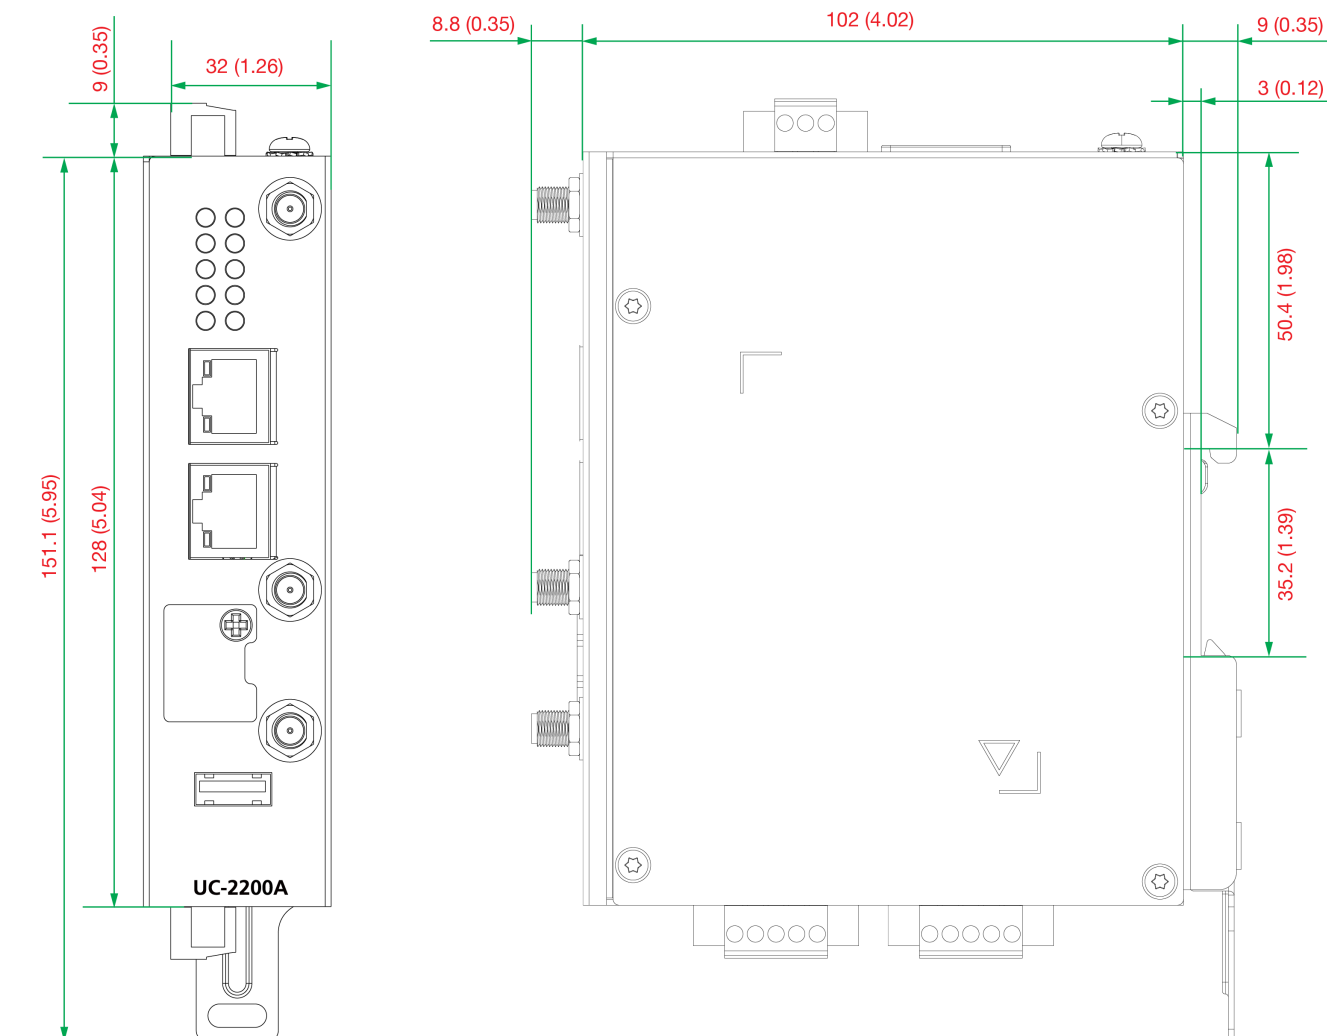

注文情報

Model Name	CPU	OS	mPCIe Slot	Operating Temperature
UC-2222A-T	Armv8 Cortex-A53, dual core, 1 GHz	Default: MIL3 Standard Order MIL3 Secure with UC-2200A (CTO)	mPCIe slot x 1, reserved for wireless module	-40 to 75°C
UC-2222A-T-EU	Armv8 Cortex-A53, dual core, 1 GHz	Default: MIL3 Standard Order MIL3 Secure with UC-2200A (CTO)	mPCIe slot x 1, European region LTE Cat. 4 module preinstalled	-40 to 70°C
UC-2222A-T-AP	Armv8 Cortex-A53, dual core, 1 GHz	Default: MIL3 Standard Order MIL3 Secure with UC-2200A (CTO)	mPCIe slot x 1, APAC region LTE Cat. 4 module preinstalled	-40 to 70°C
UC-2222A-T-US	Armv8 Cortex-A53, dual core, 1 GHz	Default: MIL3 Standard Order MIL3 Secure with UC-2200A (CTO)	mPCIe slot x 1, U.S. region LTE Cat. 4 module preinstalled	-40 to 70°C

アクセサリ（別売）

Power Adapters

PWR-12150-USJP-SA-T	Locking barrel plug, 12 VDC 1.5 A, 100 to 240 VAC, US/JP plug, -40 to 75°C operating temperature
PWR-12150-CN-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC, CN plug, -40 to 75°C operating temperature
PWR-12150-AU-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC, AU plug, -40 to 75°C operating temperature
PWR-12150-EU-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC, EU plug, -40 to 75°C operating temperature
PWR-12150-UK-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC, UK plug, -40 to 75°C operating temperature

Cables

CBL-F9DPF1x4-BK-100	Console cable with 4-pin connector, 1 m
CBL-PJTB-10	Non-locking barrel plug to bare-wire cable

Wireless Packages

WP-MOD-W-SparkLAN-Wi-Fi 5	Wireless package with a Wi-Fi 5 mPCIe card, 2 thermal pads, 1 heat sink, 2 M2 x 3 mm screws (for attaching Wi-Fi bracket to PCB) and 3 M3 x 6 mm screws (for attaching heat sink to PCB), 2 antenna cables.
---------------------------	---

Antennas

ANT-WDB-ARM-0202	2 dBi at 2.4 GHz or 2 dBi at 5 GHz, RP-SMA (male), dual-band, omnidirectional antenna
ANT-LTE-ASM-05 BK	704-960/1710-2620 MHz, LTE stick antenna, 5 dBi
ANT-LTEUS-ASM-01	GSM/GPRS/EDGE/UMTS/HSPA/LTE, 1 dBi, omnidirectional rubber-duck antenna
ANT-LTE-OSM-06-3m BK MIMO	Multiband antenna with screw-fastened mounting option for 700-2700/2400-2500/5150-5850 MHz frequencies
ANT-5G-OSM-04	4 dBi LTE/5G NR dipole antenna with SMA (male) connector
ANT-GPS-CSM-04-3m BK	20 dBi at 1575 to 1605 MHz, SMA (male), right-hand circular polarization (RHCP), active GPS antenna, 3-meter cable

Wireless Antenna Cables

A-CRF-SMIF-100	Wireless antenna cable package with 2 100-cm cables (SMA connectors)
----------------	--

Wall-Mounting Kits

WK-33-01	Wall-mounting kit with 2 plates (98.6 x 33.8 x 5 mm), 4 TMS M3 4-mm screws
----------	--

© Moxa Inc. All rights reserved.2025年5月9日更新。

Moxa Inc.の明白な許可を書面で取得しない限り、本書およびその一部の複製や使用はいかなる方法やいかなる場合でも許可されません。製品の仕様は予告なく変更されることがあります。最新の製品情報については当社のWebサイトをご覧ください。