

MDS-G4000-4XGS/ MDS-G4000-L3-4XGS Series Quick Installation Guide

Version 1.4, April 2024

Technical Support Contact Information
www.moxa.com/support



© 2024 Moxa Inc. All rights reserved.

P/N: 1802040000024



Package Checklist

Moxa's MDS-G4000-4XGS/MDS-G4000-L3-4XGS Series industrial modular DIN-rail switch is shipped with the following items. If any of these items are missing or damaged, please contact your customer service representative for assistance.


- 1 MDS-G4000-4XGS or MDS-G4000-L3-4XGS switch
- Pre-installed DIN-rail kit
- 2 screws (M4 x 8 mm & M3 x 8 mm)
- Quick installation guide (printed)
- Substance Disclosure Table
- Product Certificate of Quality Inspection (Simplified Chinese)
- Product Notices (Simplified Chinese)
- Warranty card

NOTE You can find information and software downloads on the relevant product pages located on Moxa's website:
www.moxa.com

Default Settings

- IP address: 192.168.127.253
- Subnet mask: 255.255.255.0
- Username: admin
- Password: moxa

Panel Layouts

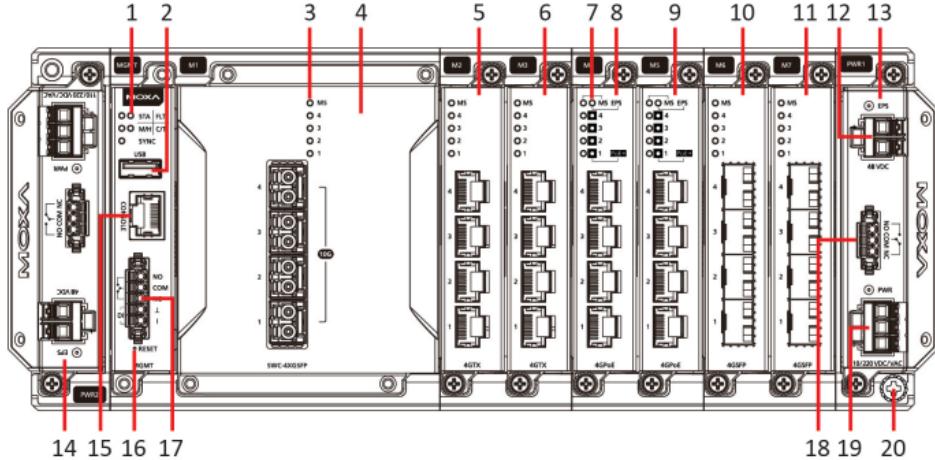


1. System status LEDs (from left to right, top to bottom)
STATE, FAULT, MASTER/HEAD, COUPLER/TAIL, and SYNC LED indicators
2. USB storage port
3. Module Status
4. Switch and Control Module slot 1 (embedded)
5. Ethernet module slot 2
6. Ethernet module slot 3
7. External power input status from EPS
8. Ethernet module slot 4
9. Ethernet module slot 5
10. Ethernet module slot 6
11. Ethernet module slot 7


12. External Power Supply (EPS) input for PoE
13. Redundant power module slot 1
14. Redundant power module slot 2
15. RS-232 console port with RJ45 interface
16. Reset button (Pin hole 0.9 mm diameter)
17. Relay output and Digital Input port
18. Relay output
19. Power input
20. Grounding screw

Dimensions


MDS-G4012-4XGS and MDS-G4012-L3-4XGS Series

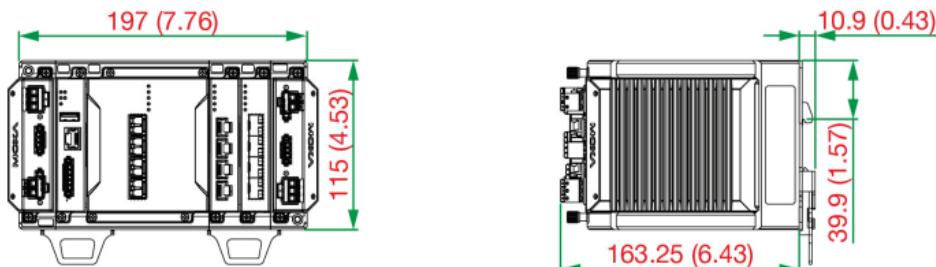

MDS-G4020-4XGS and MDS-G4020-L3-4XGS Series

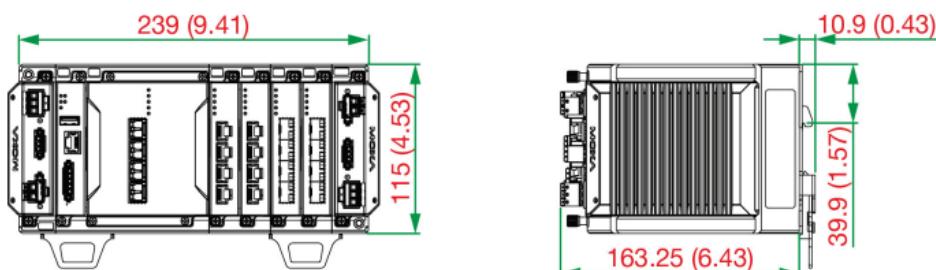


MDS-G4028-4XGS and MDS-G4028-L3-4XGS Series

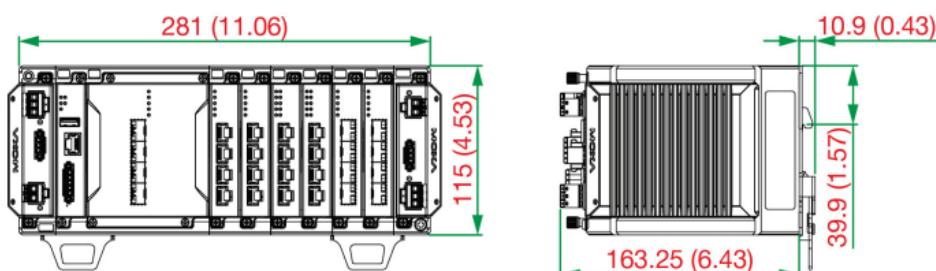


Unit: mm (inch)

Ethernet Modules (Hardware Rev.2.0.0 and above)


LM-7000H-4GTX




LM-7000H-4GSFP




LM-7000H-4GPoE



LM-7000H-4TX




LM-7000H-4PoE



Power Modules (Hardware Rev.2.1.0 and above)


PWR-HV-P48-A

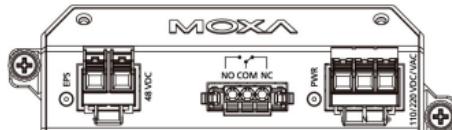

PWR-HV-NP




PWR-LV-P48-A

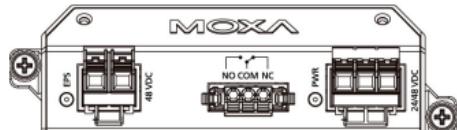


PWR-LV-NP



DIN-rail Dimension and Instructions

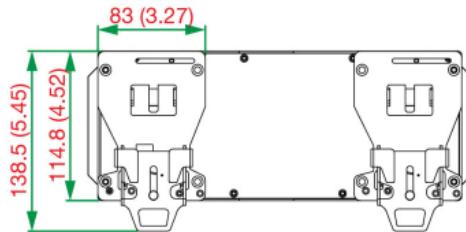

Unit: mm (inch)

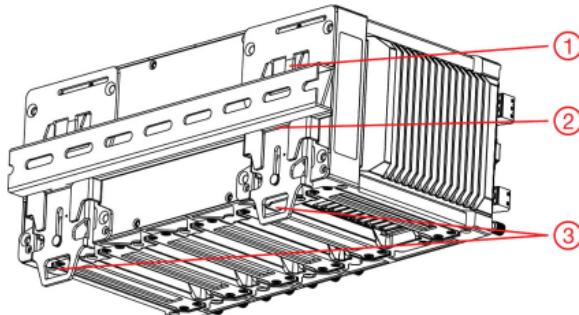


1. Insert the upper lip of the DIN rail into the DIN-rail mounting kit.
2. Press the device towards the DIN rail until it snaps into place.
3. Pull down the two latches one by one to release the DIN-rail kit and lift up to remove the device from the DIN rail.

NOTE The DIN-rail must use TS35 (15 mm) specification for the MDS-G4000-4XGS/MDS-G4000-L3-4XGS Series.


Wall Mount Dimension and Instructions (Optional: WK-112-01)

NOTE The wall-mount kit is certified for Hazardous Location usage.


Mounting the switch to a wall requires four screws per kit (there are two kits). The heads of the screws should be between 6.0 to 9.0 mm in diameter, and the diameter of screw thread should be between 3.5 to 4 mm, as shown in the figure on the right. Use the switch with the wall-mounting kit attached as a guide to mark the correct locations of the eight screws.




MDS-G4012-4XGS and MDS-G4012-L3-4XGS Series

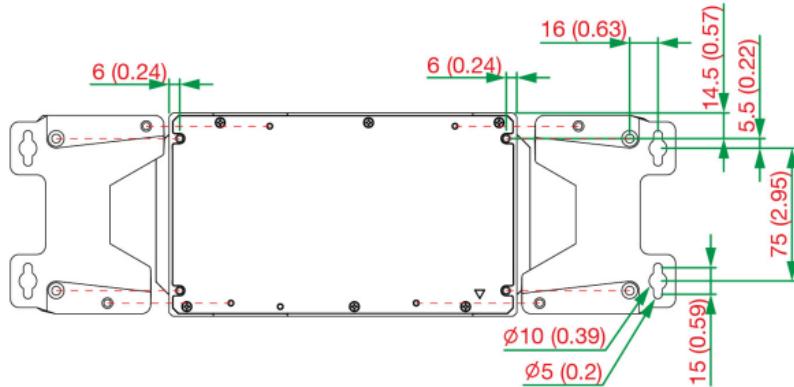

MDS-G4020-4XGS and MDS-G4020-L3-4XGS Series

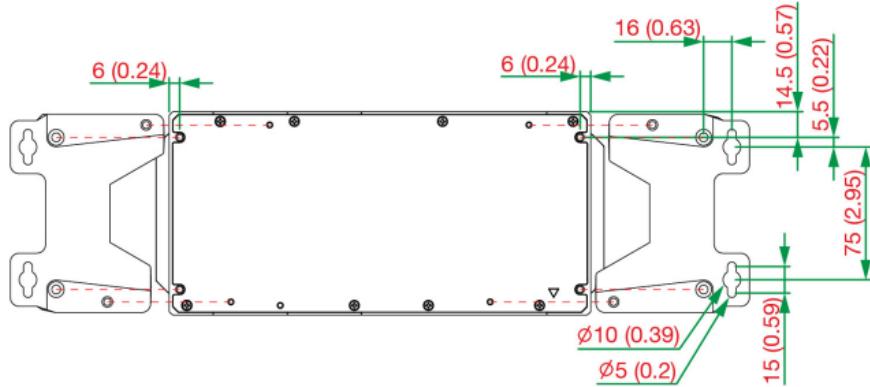

MDS-G4028-4XGS and MDS-G4028-L3-4XGS Series

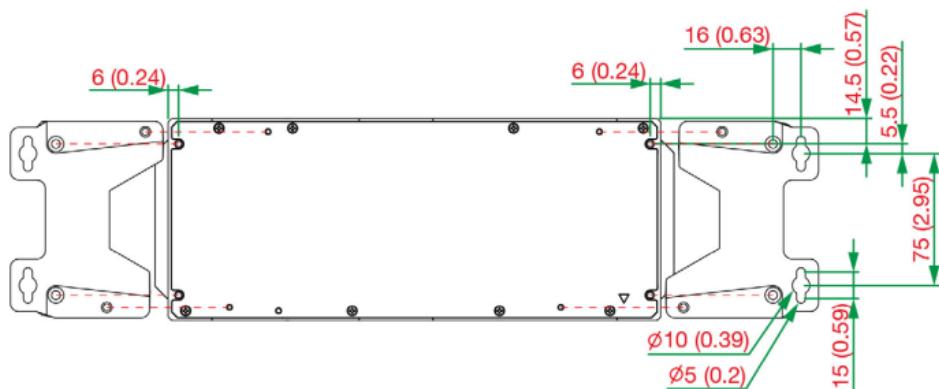

Please note, there are two wall-mount kit screws for the MDS Series (M4 x 8 mm and M3 x 6 mm).

Rack-mounting Kit Dimensions and Instructions

(Optional: RK-3U-02)

Please refer to the RK-3U-02 Series QIG.

Matters That Require Attention

- Elevated Operating Temperature:** If installed in a closed or multi-unit rack assembly, the operating ambient temperature of the rack environment may be greater than room temperature. Therefore, consideration should be given to installing the equipment in an environment compatible with the maximum ambient temperature (T_{ma}) specified by the manufacturer.

NOTE In order to ensure reliable operations, please make sure the operating temperature of the environment does not exceed the spec. When mounting a rack-mounted switch with other operating units in a cabinet without forced ventilation, it is recommended that 1U of space is reserved between each rack-mounted switch and/or device.

- Required Air Flow:** Installation of the equipment in a rack should be such that the amount of air flow required for safe operation of the equipment is not compromised.
- Mechanical Loading:** Mounting of the equipment in the rack should be such that a hazardous condition is not achieved due to uneven mechanical loading.
- Circuit Overloading:** Consideration should be given to the connection of the equipment to the supply circuit and the effect that overloading of the circuits might have on overcurrent protection and supply wiring. Appropriate consideration of equipment nameplate ratings should be used when addressing this concern.
- Reliable Grounding:** Reliable grounding of rack-mounted equipment should be maintained. Particular attention should be given to supply connections other than direct connections to the branch circuit (e.g. use of power strips).

ATTENTION

Safety First!

Be sure to disconnect the power cord before installing and/or wiring your Ethernet Switch. Calculate the maximum possible current in each power wire and common wire. Observe all electrical codes dictating the maximum current allowable for each wire size. If the current goes above the maximum ratings, the wiring could overheat, which can cause serious damage to your equipment.

WARNING

When end users are using Optical SFP Communications modules, these must be limited to Laser Class 1.

Connecting the Power Inputs

NOTE The required power module depends on the choice of LM-7000H module. Refer to the following power/module combination requirements.

- LM-7000H non-PoE modules:
Any power module
- LM-7000H PoE modules:
PWR-HV-P48-A, PWR-LV-P48-A only

The MDS-G4000-4XGS/MDS-G4000-L3-4XGS Series supports 4 types of power supply:

- PWR-HV-P48-A: one 110/220 VAC/VDC (90 to 264 VAC, 88 to 300 VDC), one 48 VDC PoE power input for PoE+ ports.
- PWR-LV-P48-A: one 24/48 VDC (18 to 72 VDC), one 48 VDC PoE power input for PoE+ ports.
- PWR-HV-NP: one 110/220 VAC/VDC (90 to 264 VAC, 88 to 300 VDC) power input.
- PWR-LV-NP: one 24/48 VDC (18 to 72 VDC) power input.


For the PWR-HV-P48-A, the 110/220 VAC/VDC power supplies provide power to the switch. Separate 48 VDC power supplies are required to provide power to all PoE+ ports (50 to 57 VDC is recommended for IEEE 802.3at devices. The maximum PoE output from an external power supply is 720 W when the operating temperature is under 60°C; 360 W when the operating temperature is under 75°C.)

For the PWR-LV-P48-A models, the 24/48 VDC power supplies provide power to the switch. Separate 48 VDC power supplies are required to provide power to all PoE+ ports (50 to 57 VDC is recommended for IEEE 802.3at devices. The maximum PoE output from an external power supply is 720 W when the operating temperature is under 60°C; 360 W when the operating temperature is under 75°C.)


For the PWR-HV-NP, the 110/220 VAC/VDC power supplies provide power to the switch. For the PWR-LV-NP, the 24/48 VDC power supplies provide power to the switch.

Power Terminal Blocks

The connections for the power input are on the power modules.

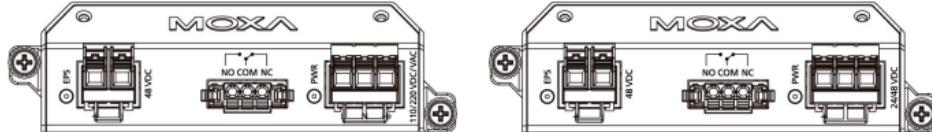


PWR-HV-P48-A/PWR-HV-NP

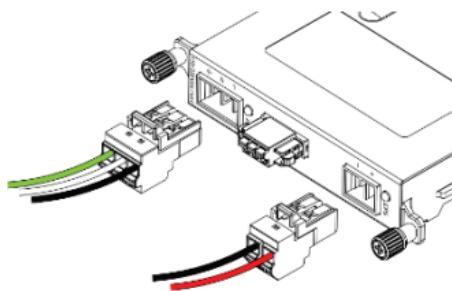

Step 1: Insert the neutral/line (L/N/Ground) AC wires into the terminals.

Step 2: Insert the terminal block connector into the terminal block receptor.

PWR-LV-P48-A/PWR-LV-NP

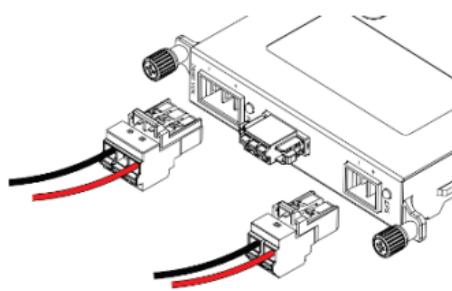

Step 1: Insert the negative/positive (-+) DC wires into the terminals.

Step 2: Insert the terminal block connector prongs into the terminal block receptor.

PoE Power Terminal Blocks

Step 1: Insert the negative/positive DC wires into the -/+ terminals, respectively.

Step 2: Insert the terminal block connector prongs into the terminal block receptor.

NOTE In order to have higher levels of protection against surge, it is suggested to install a surge protector in front of the power input of the PoE powered device so that it is suitable for use in IEC 61850 conditions.



WARNING

When wiring the power input, we suggest using the cable type - AWG (American Wire Gauge) 16 (1.31 mm²) and the corresponding pin type cable terminals. The rated temperature of the wiring should be at least 105°C and the wire type should be CU.

NOTE When two power units are installed on the MDS-G4000-4XGS/MDS-G4000-L3-4XGS Series switch, both power units will be activated simultaneously, which will enable power redundancy.

NOTE The reverse power input connection will not activate the device or PoE input. In addition, the PoE will only activate when the external power supply is installed on the same power unit.

Wiring the Relay Contact

Each power module has one relay output that can provide two types of relay output. Refer to the table below for detailed information.

The relay contact is used to detect user-configured events. Two wires are attached to the relay pins with normally close and normally open options.

FAULT: The relay contact of the 3-pin terminal block connector is used to detect user-configured events. The module provides normally open and normally closed circuits depending on what the user chooses. For pin definitions, refer to the table below.

Relay Connection	Power Off	Boot up Ready	Event Trigger
NO and COM	Closed Circuit	Open Circuit	Closed Circuit
NC and COM	Open Circuit	Closed Circuit	Open Circuit



WARNING

When wiring the relay contact, we suggest using the cable type - AWG (American Wire Gauge) 16-21 (1.31-0.412 mm²) and the corresponding pin type cable terminals. The rated temperature of the wiring should be at least 105°C and the wire type should be CU.

Digital Input/Output

Digital Output

1 relay output with a current carrying capacity of 2 A @ 30 VDC.

Digital Input

1 digital output with the same ground, but electrically isolated from the electronics.

- +13 to +30 V for state 1
- -30 to +1 V for state 0
- Max. input current: 8 mA



WARNING

When wiring the Digital Input/Output contact, we suggest using the cable type - AWG (American Wire Gauge) 16-28 (1.31-0.081 mm²) and the corresponding pin type cable terminals. The rated temperature of the wiring should be at least 105°C and the wire type should be CU.

Installing and Removing the Ethernet Modules

The Ethernet modules are hot-swappable for the same module type. You can mount or remove the Ethernet module while the device is operating.

NOTE

1. When performing a cold start, you cannot remove and insert a module before the device has fully booted up as this will cause the module to fail initialization.
2. The default module is 4XGS. If this is the first time mounting a 4TX or SFP module, please reboot the switch after inserting it. The hot-swappable function, as defined above, will work after the device is rebooted for the first time.
3. When swapping out a slotted module with a different type of module, it is recommended to reconfigure the settings or reset the device to factory default settings after rebooting the switch.

The installation procedure is as follows:

1. Insert the Ethernet module straight into the slot
2. Fasten the module to the device by tightening the 2 screws. The tightening torque is 3.5 kgf-cm (0.35 Nm)

The removal procedure is as follows:

1. Loosen the 2 screws of the module
2. Pull the module out of the slot
3. Insert the dummy module into the slot in order to have better protection against dust and EMI
4. Fasten the dummy module using the 2 screws. The tightening torque is 4 kgf-cm (0.4 Nm)

Installing and Removing the Power Modules

The power supply units are hot-swappable when both power modules are installed. You can mount or remove the power supply units while the device is operating.

The installation procedure is as follows:

1. Insert the power unit straight into the slot
2. Fasten the unit to the device by tightening the 2 screws. The tightening torque is 3.5 kgf-cm (0.35 Nm)

The removal procedure is as follows:

1. Loosen the 2 screws of the module
2. Pull the module out of the slot
3. Insert the dummy module into the slot in order to have better protection against dust and EMI.
4. Fasten the dummy module using the 2 screws. The tightening torque is 4 kgf-cm (0.4 Nm)

NOTE

- If one of the modules is removed from the device, it is recommended to insert a dummy module in order to provide better protection against dust and EMI.

Grounding the Moxa Industrial DIN-rail Switch

Grounding and wire routing help limit the effects of noise due to electromagnetic interference (EMI). Run the ground connection from the ground screw to the grounding surface prior to connecting devices.



ATTENTION

This product is intended to be mounted to a well-grounded mounting surface, such as a metal panel. We use the green-and-yellow cable type AWG (American Wire Gauge) min. 16 (1.31 mm²) for grounding.

NOTE The PoE power connection is for indoor and local area network usage only.

NOTE Using a shielded cable achieves better electromagnetic resistance.

RS-232 with RJ45 Interface Console Connection

The switch has an RS-232 serial console with an RJ45 interface. Please use a Moxa 9-pin female console cable to connect to your PC's COM port (or via USB-to-Serial converters or hubs). You can then use a console terminal program, such as Moxa's PComm Terminal Emulator, to access the console configuration utility of the switch.

RS-232 Setup:

- Baud rate: 115,200
- Data Bits: 8
- Parity: None
- Stop Bits: 1
- Terminal Type: VT100

USB Storage Connection

Use Moxa's ABC-02-USB automatic backup configurator to connect to the USB storage port (Type A connector; see the diagram below for pinout assignments) to back up and restore configuration files, auto-load configuration files, upgrade firmware, and back up system log files.



Pin	Description
1	VCC (+5V)
2	D- (Data-)
3	D+ (Data+)
4	GND (Ground)

The Reset Button (diameter 0.9 mm)

The reset button can perform two functions. One is to reset the switch to factory default settings and the other is to reboot the switch if the button has been depressed and release immediately.

Resetting to Factory Default Settings

Depress the Reset button for five seconds to load the factory default settings. Use a pointed object, such as a straightened paper clip or needle (the diameter must not exceed 0.9 mm), to depress the Reset button. When you do so, the STATE LED will start to blink about four times per second. Continue to depress the STATE LED until it begins blinking more rapidly; this indicates that the button has been depressed for five seconds and you can release the Reset button to load factory default settings.

NOTE Do NOT power off the switch when loading default settings.

LED Indicators

The function of each LED is described in the table below.

LED	Color	State	Description
System LEDs			
STA (STATE)	Green	On	Normal operation.
		Blinking (1 Hz)	1. Initializing system services. 2. When pressing the reset button for 5 seconds to reset to factory default settings.
		Blinking (4 Hz)	1. The system is ready to perform a factory reset after pressing the reset button for 5 seconds. 2. When the external storage ABC-02 automatic backup device is connected to the switch.
		Off	N/A
		Red	On The system initialization has failed.
FLT (FAULT)	Red	On	1. Switch failed to initialize, or 2. EEPROM information error.
		Blinking	The switch boots up and the firmware loads to memory.
		Off	The system is operating normally.
M/H (MSTR/ HEAD)	Green	On	1. The switch is the Master of Turbo Ring 1 and/or Turbo Ring 2. 2. The switch is the Head of the Turbo Chain. 3. The switch is the Manager of the MRP Ring.

LED	Color	State	Description
		Blinking	<ul style="list-style-type: none"> 1. The switch is the Master of Turbo Ring 1 and/or Turbo Ring 2 and at least one ring is broken. 2. The switch is a Member of the Turbo Ring and the link of all the corresponding ring ports is down. 3. The switch is the Head of the Turbo Chain and the chain is broken. 4. The switch is the Manager of the MRP Ring and the ring is open. 5. The switch is a Member of the Turbo Chain and the link of the corresponding Member Port 1 is down. 6. The switch is the Tail of the Turbo Chain and the link of the corresponding Member Port is down.
		Off	<ul style="list-style-type: none"> 1. The switch is not the Master of the Turbo Ring 1 or Turbo Ring 2. 2. The switch is not the Head of the Turbo Chain. 3. The switch is not the Manager of the MRP Ring.
C/T (CPLR/ TAIL)	Green	On	<ul style="list-style-type: none"> 1. The switch's ring coupling or dual homing function is enabled. 2. The switch is the Tail of the Turbo Chain.
		Blinking	<ul style="list-style-type: none"> 1. The switch is the Tail of the Turbo Chain and the Chain is broken. 2. The switch is the Head of the Turbo Chain and the link of the corresponding Member Port is down. 3. The switch is a Member of the Turbo Chain and the link of the corresponding Member Port 2 is down.
		Off	The switch's coupling function is disabled or the switch is not the Tail of the Turbo Chain.
SYNC	Amber	On	The PTP function is enabled.
		Blinking	The switch is receiving sync packets.
		Off	The PTP function is disabled.
	Green	On	The PTP function has successfully converged.

LED	Color	State	Description
System LEDs (Except PWR)	Green/ Red/ Amber	Blinking (4 Hz)	The switch is being discovered/located by the locator function. Applies to the following LEDs: S, F, M/H, C/T, SYNC. Each LED will light up in its default color.

SWC-4XGSFP

LED	Color	State	Description
MS (Module State)	Green	On	Normal operation.
		Blinking	The module is booting up.
		Off	The module is out of service.
	Red	On	1. The module initialization has failed, or
			2. A module designed for a different model was inserted.
		Off	
SFP+ (10GbE)	Green	On	The port is active and is linked at 10 Gbps.
		Blinking	The port's data is being transmitted at 10Gbps.
		Off	The port is inactive or the link is down.
	Amber	On	When the port is active and is linked at 1000 Mbps.
		Blinking	The port's data is being transmitted at 1000 Mbps.
		Off	The port is inactive or the link is down.

LM-7000H-4GTX/LM-7000H-4GSFP/LM-7000H-4TX

LED	Color	State	Description
MS (Module State)	Green	On	Normal operation.
		Blinking	The module is booting up.
	Red	Off	The module is out of service.
Copper (10/100 Mbps)	Green	On	1. The module initialization has failed, or 2. A module designed for a different model was inserted.
		Blinking	The port is active and is linked at 100 Mbps.
		Off	The port's data is being transmitted at 100 Mbps.
	Amber	On	The port is inactive or the link is down.
		Blinking	The port is active and is linked at 10 Mbps.
		Off	The port's data is being transmitted at 10 Mbps.
Copper (10/100/1000 Mbps)	Green	On	The port is active and is linked at 1000 Mbps.
		Blinking	The port's data is being transmitted at 1000 Mbps.
		Off	When the port is inactive or the link is down.
	Amber	On	The port is active and is linked at 10/100 Mbps.
		Blinking	When the port's data is being transmitted at 10/100 Mbps.
		Off	The port is inactive or the link is down.
SFP (100/1000 Mbps)	Green	On	The port is active and is linked at 1000 Mbps.
		Blinking	The port's data is being transmitted at 1000 Mbps.
		Off	The port is inactive or the link is down.
	Amber	On	The port is active and is linked at 100 Mbps.
		Blinking	The port's data is being transmitted at 100 Mbps.
		Off	The port is inactive or the link is down.

LM-7000H-4GPoE/LM-7000H-4PoE

LED	Color	State	Description
MS (Module State)	Green	On	Normal operation.
		Blinking	The module is booting up.
		Off	This module is out of service.
	Red	On	1. The module failed to initialize. 2. A user inserted a module designed for a different model. 3. When performing a cold start, the module was removed and inserted before initialization was complete.
EPS (External Power Supply for PoE module)	Amber	On	Normal operation.
		Off	No external power supply for PoE.
Copper (10/100 Mbps)	Green	On	When the port is active and links on at 100 Mbps.
		Blinking	When the port's data is being transmitted at 100 Mbps.
		Off	When the port is inactive or link down.
	Amber	On	When the port is active and links on at 10 Mbps.
		Blinking	When the port's data is being transmitted at 10 Mbps.
		Off	When the port is inactive or link down.
Copper (10/100/1000Mbps)	Green	On	When the port is active and links on at 1,000 Mbps.
		Blinking	When the port's data is being transmitted at 1,000 Mbps.
		Off	When the port is inactive or link down.
	Amber	On	When the port is active and links on at 10/100Mbps.
		Blinking	When the port's data is being transmitted at 10/100 Mbps.
		Off	When the port is inactive or link down.
PoE/PoE+	Green	On	When the port is connected to an IEEE 802.3at powered device (PD).
		Off	1. When power is not being supplied to a powered device (PD), or 2. The port is not connected to an IEEE 802.3at standard PD.
	Amber	On	When the port is connected to an IEEE 802.3af powered device (PD).
		Blinking	The PoE power has been shut off because of low power budget.
	Red	On	Powered device (PD) detection failure.
		Blinking	Over current or short circuit on the powered Device (PD) was detected.

PWR-HV-P48-A/PWR-LV-P48-A

LED	Color	State	Description
EPS (External Power Supply)	Amber	On	External power is being supplied to the module's EPS input.
		Off	No external power supply.
PWR	Amber	On	Power is being supplied to the module's power input.
		Off	Power is not being supplied to the module's power input.

PWR-HV-NP/PWR-LV-NP

LED	Color	State	Description
PWR	Amber	On	Power is being supplied to the module's power input.
		Off	Power is not being supplied to the module's power input.

Specifications

Interface	
10GbE Ethernet	4-ports 10GbE SFP+ slots
Gigabit Ethernet	Up to 24 ports
Modules	2/4/6 slots for optional 4-port FE/GbE modules
Slot Combination	See the LM-7000H Series modules datasheet for more information. Note: The required power module depends on the choice of LM-7000H module. Refer to the following power/module combination requirements: LM-7000H non-PoE modules: Any power module LM-7000H PoE modules: PWR-HV-P48-A, PWR-LV-P48-A only
Console Port	RS-232 (RJ45 connector)
Buttons	Reset button
Storage Port	USB (Type A connector)
LED Indicators	PWR, EPS, STATE, SYNC, FAULT, MSTR/HEAD, CPLR/TAIL
Alarm Contact Channels	3 (on the MGMT, PWR1, and PWR2 modules) Relay output with current carrying capacity of 2 A @ 30 VDC.
Digital Input Channels	1 (on the MGMT module)
Digital Inputs	+13 to +30 V for state 1 -30 to +3 V for state 0 Max. input current: 8 mA

Power Requirements	
Input Voltage	<p>With PWR-HV-P48-A installed: 110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz, PoE: 48 VDC</p> <p>With PWR-LV-P48-A installed: 24/48 VDC, PoE: 48 VDC</p> <p>With PWR-HV-NP installed: 110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz</p> <p>With PWR-LV-NP installed: 24/48 VDC</p>
Operating Voltage	<p>With PWR-HV-P48-A installed: 88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz, PoE: 46 to 57 VDC</p> <p>With PWR-LV-P48-A installed: 18 to 72 VDC, PoE: 46 to 57 VDC</p> <p>With PWR-HV-NP installed: 88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz</p> <p>With PWR-LV-NP installed: 18 to 72 VDC</p>
Rated Input Current	<p>With PWR-HV-P48-A/PWR-HV-NP installed: 0.38 A @ 110-220 VDC 0.75 A @ 110-220 VAC</p> <p>With PWR-LV-P48-A/PWR-LV-NP installed: 3.3 A @ 24/48 VDC</p>
Input Current (Full modules installed)	<p>With PWR-HV-P48-A/PWR-HV-NP installed: Max. 0.38 A @ 110 VDC Max. 0.20 A @ 220 VDC Max. 0.75 A @ 110 VAC Max. 0.48 A @ 220 VAC</p> <p>With PWR-LV-P48-A/PWR-LV-NP installed: Max. 1.90 A @ 24 VDC Max. 0.95 A @ 48 VDC</p> <p>EPS (PoE models only): Max. 8.2 A @ 48 VDC</p>
Power Consumption (Max.) (Full modules installed)	<p>With PWR-HV-P48-A/PWR-HV-NP installed: Max. 41.8 W @ 110 VDC Max. 44.2 W @ 220 VDC Max. 46.6 W @ 110 VAC Max. 46.5 W @ 220 VAC</p> <p>With PWR-LV-P48-A/PWR-LV-NP installed: Max. 45.8 W @ 24 VDC Max. 45.8 W @ 48 VDC</p>
Peak Inrush Current	<p>PWR-HV-P48-A/PWR-HV-NP: 110 VAC: < 10 A (t > 0.1 ms) 220 VAC: < 20 A (t > 0.1 ms)</p> <p>PWR-LV-P48-A/PWR-LV-NP: 24 VDC: < 5 A (t > 0.1 ms) 48 VDC: < 10 A (t > 0.1 ms)</p>
Maximum PoE Power Output per Port	36 W

Total PoE Power Budget	Max. 360 W (with one power supply) for total PD consumption at 48 VDC input for PoE systems Max. 360 W (with one power supply) for total PD consumption at 53 to 57 VDC input for PoE+ systems Max. 720 W (with two power supplies) for total PD consumption at 48 VDC input for PoE systems Max. 720 W (with two power supplies) for total PD consumption at 53 to 57 VDC input for PoE+ systems
Overload Current Protection	Present
Reverse Polarity Protection	Present
Physical Characteristics	
Ingress Protection Rating	IP40 (This rating will only be achieved when the relay output terminal block and all modules are installed.)
Dimensions	<p>MDS-G4012-4XGS/MDS-G4012-L3-4XGS: 197 x 115 x 163.25 mm 212 x 115 x 163.25 mm with dual PWR-HV-P48-A/ PWR-LV-P48-A power modules installed</p> <p>MDS-G4020-4XGS/MDS-G4020-L3-4XGS: 239 x 115 x 163.25 mm 254 x 115 x 163.25 mm with dual PWR-HV-P48-A/ PWR-LV-P48-A power modules installed</p> <p>MDS-G4028-4XGS/MDS-G4028-L3-4XGS: 281 x 115 x 163.25 mm 296 x 115 x 163.25 mm with dual PWR-HV-P48-A/ PWR-LV-P48-A power modules installed</p>
Weight	<p>MDS-G4012-4XGS-T/MDS-G4012-L3-4XGS-T Series: 3.03 kg (6.68 lb)</p> <p>MDS-G4020-4XGS-T/MDS-G4020-L3-4XGS-T Series: 3.40 kg (7.50 lb)</p> <p>MDS-G4028-4XGS-T/MDS-G4028-L3-4XGS-T Series: 3.79 kg (8.36 lb)</p> <p>LM-7000H-4GSFP: 0.30 kg (0.66 lb)</p> <p>LM-7000H-4GTX: 0.24 kg (0.53 lb)</p> <p>LM-7000H-4GPoE: 0.31 kg (0.69 lb)</p> <p>LM-7000H-4TX: 0.24 kg (0.53 lb)</p> <p>LM-7000H-4PoE: 0.31 kg (0.69 lb)</p> <p>PWR-HV-P48-A: 0.42 kg (0.93 lb)</p> <p>PWR-LV-P48-A: 0.40 kg (0.88 lb)</p> <p>PWR-HV-NP/PWR-LV-NP: 0.34 kg (0.75 lb)</p>
Installation	<p>DIN-rail mounting: Pre-installed by default</p> <p>Wall mounting: WK-112-01 (with optional kit)</p> <p>Rack mounting: RK-3U-02 (with optional kit)</p>
Environmental Limits	
Operating Temp.	-40 to 75°C (-40 to 167°F)
Storage Temp.	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Standards and Certifications	
Safety	EN 61010-2-201, UL 61010-2-201, EN 62368-1, UL 62368-1, IEC 62368-1, IEC 60950-1
EMC	EN 55032/35, EN 61000-6-2, EN 61000-6-4
EMI	CISPR 32, FCC Part 15B Class A

EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power 4 kV; Signal: 4 kV IEC 61000-4-6 CS: 10V IEC 61000-4-8 PFMF IEC 61000-4-11 Voltage Dips & Interruptions
Rail Traffic	EN 50121-4
Traffic Control	NEMA TS2
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-31
Vibration	IEC 60068-2-6
Power Substation	IEC 61850-3, IEEE 1613
Warranty	
Warranty Period	5 years
Details	See www.moxa.com/warranty

Restricted Access Locations

- This equipment is intended to be used in Restricted Access Locations, such as a computer room, with access limited to service personnel or users who have been instructed on how to handle the metal chassis of equipment that is very hot. The location should only be accessible with a key or through a security system.
- External metal parts of this equipment are extremely hot. Before touching the equipment, you must take special precautions to protect your hands and body from serious injury.



ATTENTION

- This device is an open-type equipment and should be installed in a suitable enclosure.
- Please use an optical transceiver (SFP) that complies with IEC 60825-1, 21 CFR 1040 Section 1040.10 and 1040.11, classified as Class 1 laser product.
- If the equipment is used in a manner not specified by the manufacturer, the protection provided by the equipment may be impaired.
- The installation and the safety of any system incorporating the equipment is the responsibility of the assembler of the system.
- For any repair or maintenance needs, please contact us.

NOTE

- This device is intended for use indoor and at altitudes up to 2000 meters.
- Overvoltage category II.
- Pollution degree 2.