

AWK-3262A Series

Industrial IEEE 802.11ax Wi-Fi 6 wireless AP/bridge/client



Features and Benefits

- IEEE 802.11ax Wi-Fi 6 AP/bridge/client
- Concurrent dual-band Wi-Fi with aggregated data rates up to 1.775 Gbps
- Wi-Fi 6 OFDMA technology enables concurrent communication with multiple clients for high density environment
- Latest WPA3 encryption for enhanced wireless network security
- Millisecond-level Client-based Turbo Roaming¹
- Built-in 2.4 GHz and 5 GHz band pass filter for more reliable wireless connections
- Universal (UN) models with configurable country or region code for more flexible deployment
- -40 to 75°C wide operating temperature models (-T) provided for smooth wireless communication in harsh environments

Certifications



Introduction

The AWK-3262A Series 3-in-1 industrial wireless AP/bridge/client is designed to meet the growing need for faster data transmission speeds through IEEE 802.11ax technology for aggregated data rates of up to 1.775 Gbps. The AWK-3262A is compliant with industrial standards and approvals covering operating temperature, power input voltage, surge, ESD, and vibration. The two redundant DC power inputs increase the reliability of the power supply, and the AWK-3262A can be powered via PoE to facilitate flexible deployment. The AWK-3262A can operate concurrently on both the 2.4 and 5 GHz bands and is backwards-compatible with existing 802.11a/b/g/n/ac deployments to future-proof your wireless investments.

Advanced 802.11ax Industrial Wireless Solution

- 802.11a/b/g/n/ac/ax compliant AP/bridge/client for flexible deployment
- Wi-Fi 6 OFDMA (Orthogonal Frequency-Division Multiple Access) technology enables concurrent communication with multiple clients for improved network efficiency
- DFS channel support allows a wider range of 5 GHz channel selection to avoid interference from existing wireless infrastructure

Advanced Wireless Technology

- Seamless roaming with client-based Turbo Roaming¹ for < 150 ms roaming recovery time between APs (Client Mode)

Industrial Ruggedness

- Integrated antenna isolation designed to provide protection against external electrical interference
- -40 to 75°C wide operating temperature models (-T) provided for smooth wireless communication in harsh environments

Specifications

WLAN Interface

| | |
|---|---|
| WLAN Standards | 2.4 GHz: 802.11ax with 1024 QAM support, 20/40 MHz 5 GHz: 802.11ax with 1024 QAM support, 20/40/80 MHz |
| Frequency Band for US (20 MHz operating channels) | AWK-3262A US Models Only: 2.412 to 2.462 GHz (11 channels) 5.180 to 5.240 GHz (4 channels) |

1. The Turbo Roaming recovery time indicated herein is an average of test results documented, in optimized conditions, across APs configured with interference-free 20-MHz RF channels, WPA2-PSK security, and default Turbo Roaming parameters. The clients are configured with 3-channel roaming at 100 Kbps traffic load. Other conditions may also impact roaming performance. For more information about Turbo Roaming parameter settings, refer to the product manual.

| | |
|--|---|
| | 5.260 to 5.320 GHz (4 channels) ² 5.500 to 5.700 GHz (11 channels) ² 5.745 to 5.825 GHz (5 channels) |
| Frequency Band for UN (20 MHz operating channels) | AWK-3262A UN Models Only: 2.412 to 2.472 GHz (13 channels) 5.180 to 5.240 GHz (4 channels) 5.260 to 5.320 GHz (4 channels) ² 5.500 to 5.700 GHz (11 channels) ² 5.745 to 5.825 GHz (5 channels) Available channels change depending on the selected country or region code. |
| Wireless Security | WEP encryption (64-bit and 128-bit) WPA/WPA2/WPA3-Enterprise (IEEE 802.1X/RADIUS, TKIP, AES) WPA/WPA2/WPA3-Personal |
| Transmission Rate | 2.4 GHz: Up to 573.5 Mbps 5 GHz: Up to 1,201 Mbps |
| Transmitter Power for 802.11a (Dual Chain) | 27 ³ ±1.5 dBm @ 6 Mbps 24.5 ³ ±1.5 dBm @ 54 Mbps |
| Transmitter Power for 802.11n (5 GHz, Dual Chain) | 26±1.5 dBm @ MCS0 20 MHz 22±1.5 dBm @ MCS7 20 MHz 26±1.5 dBm @ MCS0 40 MHz 22±1.5 dBm @ MCS7 40 MHz |
| Transmitter Power for 802.11ac (Dual Chain) | 26±1.5 dBm @ MCS0 20 MHz 22±1.5 dBm @ MCS8 20 MHz 25±1.5 dBm @ MCS0 40 MHz 21±1.5 dBm @ MCS9 40 MHz 25±1.5 dBm @ MCS0 80 MHz 21±1.5 dBm @ MCS9 80 MHz |
| Transmitter Power for 802.11ax (Dual Chain) | 25±1.5 dBm @ MCS0 20 MHz 20±1.5 dBm @ MCS11 20 MHz 25±1.5 dBm @ MCS0 40 MHz 20±1.5 dBm @ MCS11 40 MHz 25±1.5 dBm @ MCS0 80 MHz 20±1.5 dBm @ MCS11 80 MHz |
| Transmitter Power for 802.11b (Dual Chain) | 29 ⁴ ±1.5 dBm @ 1 Mbps 29 ⁴ ±1.5 dBm @ 11 Mbps |
| Transmitter Power for 802.11g (Dual Chain) | 27±1.5 dBm @ 6 Mbps 26±1.5 dBm @ 54 Mbps |
| Transmitter Power for 802.11n (2.4 GHz, Dual Chain) | 26±1.5 dBm @ MCS0 20 MHz 24±1.5 dBm @ MCS7 20 MHz 26±1.5 dBm @ MCS0 40 MHz 24±1.5 dBm @ MCS7 40 MHz |
| Transmitter Power for 802.11ac (2.4 GHz, Dual Chain) | 26±1.5 dBm @ MCS0 20 MHz 24±1.5 dBm @ MCS8 20 MHz 26±1.5 dBm @ MCS0 40 MHz 23±1.5 dBm @ MCS9 40 MHz |
| Transmitter Power for 802.11ax (2.4 GHz, Dual Chain) | 26±1.5 dBm @ MCS0 20 MHz 21±1.5 dBm @ MCS11 20 MHz 26±1.5 dBm @ MCS0 40 MHz 21±1.5 dBm @ MCS11 40 MHz |
| Receiver Sensitivity for 802.11a | Typ. -90 dBm @ 6 Mbps Typ. -72 dBm @ 54 Mbps |

- DFS (Dynamic Frequency Selection) channel support: In AP mode, when a radar signal is detected, the device will automatically switch to another channel. However, according to regulations, after switching channels, a 60-second availability check period is required before starting the service.
- When the ambient operating temperature exceeds 70 Cdegrees, set the maximum Transmitter power as 24 dBm
- When the ambient operating temperature exceeds 70 Cdegrees, set the maximum Transmitter power as 26 dBm

| | |
|---|---|
| Receiver Sensitivity for 802.11n (5 GHz) | Typ. -89 dBm @ MCS0 20 MHz Typ. -69 dBm @ MCS7 20 MHz Typ. -86 dBm @ MCS0 40 MHz Typ. -66 dBm @ MCS7 40 MHz |
| Receiver Sensitivity for 802.11ac (5 GHz) | Typ. -89 dBm @ MCS0 20 MHz Typ. -66 dBm @ MCS8 20 MHz Typ. -86 dBm @ MCS0 40 MHz Typ. -62 dBm @ MCS9 40 MHz Typ. -83 dBm @ MCS0 80 MHz Typ. -58 dBm @ MCS9 80 MHz |
| Receiver Sensitivity for 802.11ax (5 GHz) | Typ. -90 dBm @ MCS0 20 MHz Typ. -59 dBm @ MCS11 20 MHz Typ. -87 dBm @ MCS0 40 MHz Typ. -56 dBm @ MCS11 40 MHz Typ. -84 dBm @ MCS0 80 MHz Typ. -53 dBm @ MCS11 80 MHz |
| Receiver Sensitivity for 802.11b | Typ. -96 dBm @ 1 Mbps Typ. -88 dBm @ 11 Mbps |
| Receiver Sensitivity for 802.11g | Typ. -91 dBm @ 6 Mbps Typ. -75 dBm @ 54 Mbps |
| Receiver Sensitivity for 802.11n (2.4 GHz) | Typ. -91 dBm @ MCS0 20 MHz Typ. -72 dBm @ MCS7 20 MHz Typ. -88 dBm @ MCS0 40 MHz Typ. -69 dBm @ MCS7 40 MHz |
| Receiver Sensitivity for 802.11ac (2.4 GHz) | Typ. -91 dBm @ MCS0 20 MHz Typ. -68 dBm @ MCS8 20 MHz Typ. -88 dBm @ MCS0 40 MHz Typ. -64 dBm @ MCS9 40 MHz |
| Receiver Sensitivity for 802.11ax (2.4 GHz) | Typ. -91 dBm @ MCS0 20 MHz Typ. -59 dBm @ MCS11 20 MHz Typ. -88 dBm @ MCS0 40 MHz Typ. -56 dBm @ MCS11 40 MHz |
| WLAN Operation Mode | Access point Client Client-Router Master Slave Sniffer |
| Antenna | External, 2/2 dBi Omni-directional |
| Antenna Connectors | 2 RP-SMA female |

Ethernet Interface

| | |
|--|--|
| Standards | IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) IEEE 802.3ab for 1000BaseT(X) IEEE 802.3bz for 2.5GBaseT IEEE 802.3af for PoE IEEE 802.3at for PoE IEEE 802.3az for Energy-Efficient Ethernet IEEE 802.1Q for VLAN Tagging IEEE 802.1X for authentication |
| 10/100/1000BaseT(X) Ports (RJ45 connector) | 1 |
| PoE Ports (10/100/1000/2500BaseT(X), RJ45 connector) | 1 |

Ethernet Software Features

| | |
|---------------------------------|--|
| Management | DHCP Server DHCP Client DNS HTTP IPv4/IPv6 LLDP SMTP SNMPv1/v2c/v3 Syslog TCP/IP UDP VLAN MXconfig |
| Routing | Port forwarding Static Route NAT |
| Security | HTTPS/SSL RADIUS SSH Certificate Management |
| Time Management | SNTP Client |
| Firewall | |
| Filter | ICMP MAC address IP protocol Port-based Wi-Fi ACL Client Isolation |
| Serial Interface | |
| Console Port | RS-232 8-pin RJ45 |
| USB Interface | |
| Storage Port | USB Type A (for ABC-02 use only) |
| LED Interface | |
| LED Indicators | PWR1, PWR2, PoE, SYS, 2.4G, 5G |
| Input/Output Interface | |
| Digital Inputs | 2 Max. input current: 8 mA +13 to +30 V for state 1 +3 to -30 V for state 0 |
| Alarm Contact Channels | Relay output with current carrying capacity of 1 A @ 24 VDC |
| Buttons | Reset button |
| Physical Characteristics | |
| Housing | Metal |
| IP Rating | IP30 |
| Dimensions | 45 x 130 x 100 mm (1.77 x 5.12 x 3.94 in) |
| Weight | 755 g (1.7 lb) |
| Installation | DIN-rail mounting Wall mounting (with optional kit) |

Power Parameters

| | |
|-------------------|---|
| Input Current | 12-48 VDC, 2-0.5 A |
| Input Voltage | 12 to 48 VDC Redundant dual inputs 48 VDC Power-over-Ethernet |
| Power Connector | 1 removable 8-contact terminal block(s) |
| Power Consumption | 24 W (max.) |

Environmental Limits

| | |
|--|--|
| Operating Temperature | Standard Models: -25 to 60°C (-13 to 140°F) Wide Temp. Models: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity | 5 to 95% (non-condensing) |

Standards and Certifications

| | |
|-----------|---|
| EMC | EN 61000-6-2/-6-4 EN 55032/35 |
| EMI | CISPR 32, FCC Part 15B Class A |
| EMS | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V/m IEC 61000-4-8 PFMF: 30 A/m |
| Safety | IEC 62368-1 UL 62368-1 |
| Vibration | IEC 60068-2-6 |
| Radio | EN 300 328, EN 301 489-1/17, EN 301 893, FCC, MIC, NCC, RCM, SRRC, KC |

MTBF

| | |
|-----------|---------------------------|
| Time | 2,407,106 hrs |
| Standards | Telcordia Standard SR-332 |

Warranty


| | |
|-----------------|--|
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |

Package Contents

| | |
|------------------|---|
| Device | 1 x AWK-3262A Series wireless AP/bridge/client |
| Installation Kit | 1 x DIN-rail kit |
| Antenna | 2 x 2.4/5 GHz antenna |
| Documentation | 1 x quick installation guide 1 x warranty card |

Dimensions

Unit: mm (inch)

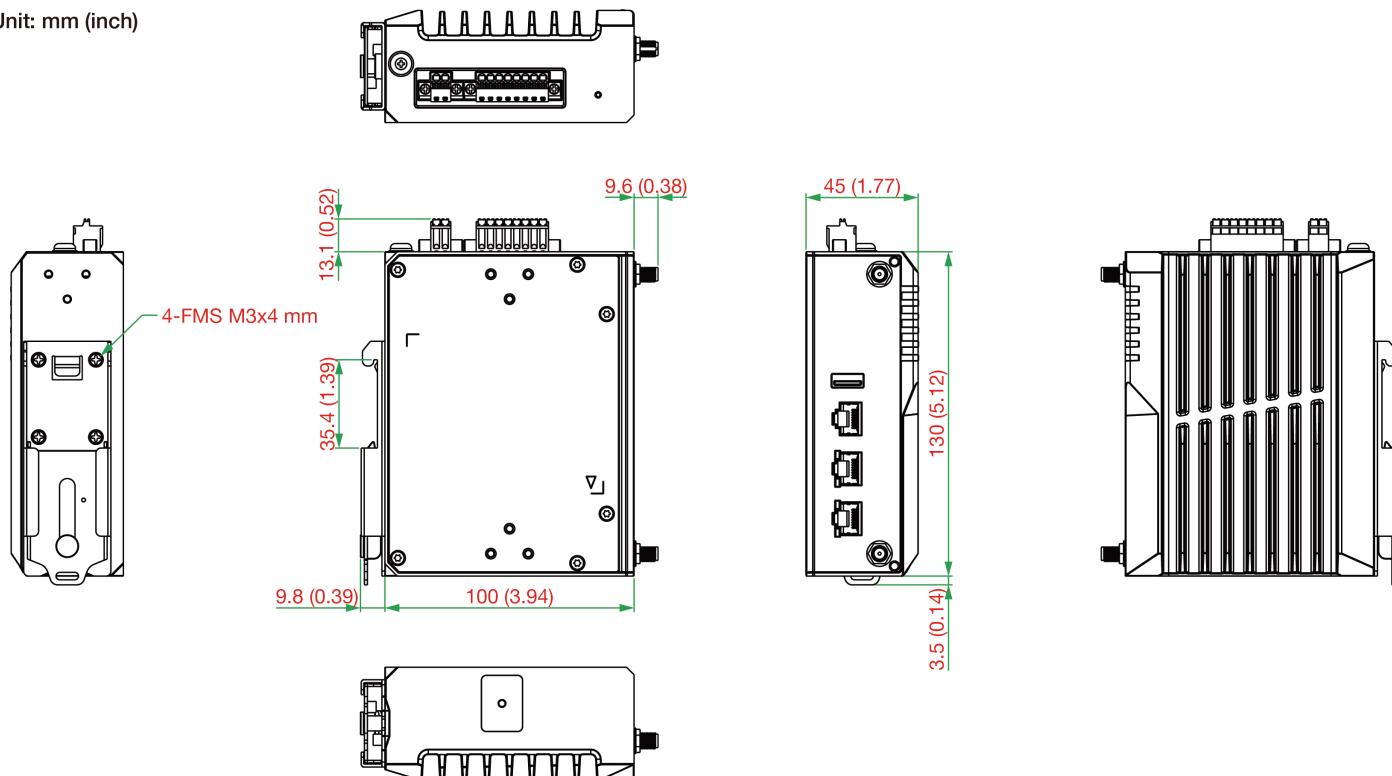

Ordering Information

| Model Name | Band | Standards | Operating Temp. |
|----------------|------|---------------------|-----------------|
| AWK-3262A-UN | UN | 802.11a/b/g/n/ac/ax | -25 to 60°C |
| AWK-3262A-UN-T | UN | 802.11a/b/g/n/ac/ax | -40 to 75°C |
| AWK-3262A-US | US | 802.11a/b/g/n/ac/ax | -25 to 60°C |
| AWK-3262A-US-T | US | 802.11a/b/g/n/ac/ax | -40 to 75°C |

Accessories (sold separately)

Antennas

| | |
|-------------------------|---|
| ANT-WSB-PNF-12-02 | 12 dBi at 2.4 GHz, N-type (female), single-band directional antenna |
| ANT-WSB5-PNF-16 | 16 dBi at 5 GHz, N-type (female), single-band directional antenna |
| ANT-WDB-ONM-0707 | 07 dBi at 2.4 GHz and 07 dBi at 5 GHz, N-type (male), dual-band omnidirectional antenna |
| ANT-WDB-PNF-1011 | 10 dBi at 2.4 GHz and 11 dBi at 5 GHz, N-type (female), dual-band directional antenna |
| ANT-WDB-ONF-0709 | 7 dBi at 2.4 GHz or 9 dBi at 5 GHz, N-type (female), dual-band, omnidirectional antenna |
| ANT-WDB-ANM-0306 | 3 dBi at 2.4 GHz or 6 dBi at 5 GHz, N-type (male), omnidirectional antenna |
| ANT-WDB-ARM-02 | 2 dBi at 2.4 GHz or 2 dBi at 5 GHz, RP-SMA (male) omnidirectional rubber-duck antenna |
| ANT-WDB-ARM-0202 | 2 dBi at 2.4 GHz or 2 dBi at 5 GHz, RP-SMA (male), dual-band, omnidirectional antenna |
| ANT-WSB-AHRM-05-1.5m | 5 dBi at 2.4 GHz, RP-SMA (male), omnidirectional/dipole antenna, 1.5 m cable |
| MAT-WDB-CA-RM-2-0205 | 2.4/5 GHz, ceiling antenna, 2/5 dBi, MIMO 2x2, RP-SMA-type (male) |
| MAT-WDB-DA-RM-2-0203-1m | 2.4/5 GHz, desktop antenna, 2/3 dBi, MIMO 2x2, RP-SMA-type (male), 1 m cable |
| MAT-WDB-PA-NF-2-0708 | 2.4/5 GHz, panel antenna, 7/8 dBi, MIMO 2x2, N-type (female) |
| ANT-WDB-ANM-0502 | 5 dBi at 2.4 GHz or 2 dBi at 5 GHz, N-type (male), omnidirectional antenna |

Wireless Antenna Cables

| | |
|-------------------|--|
| A-CRF-RFRM-R4-150 | Wireless antenna cable with RP-SMA (female) to RP-SMA (male) connectors, magnetic base, RG-174 type, 1.5 m |
| A-CRF-RMNM-L1-300 | N-type (male) to RP SMA (male) LMR-195 Lite cable, 3 m |
| A-CRF-RMNM-L1-600 | N-type (male) to RP SMA (male) LMR-195 Lite cable, 6 m |
| A-CRF-RMNM-L1-900 | N-type (male) to RP SMA (male) LMR-195 Lite cable, 9 m |

Surge Arrestors

| | |
|--------------|---|
| A-SA-NMNF-02 | 0 to 6 GHz, N-type (male) to N-type (female) surge arrester |
| A-SA-NFNF-02 | 0 to 6 GHz, N-type (female) to N-type (female) surge arrester |

Wireless Terminating Resistors

| | |
|-------------|--|
| A-TRM-50-NM | 50-ohm termination resistor with N-type male connector |
|-------------|--|

Cables

| | |
|-----------------|---|
| CBL-RJ45F25-150 | 8-pin RJ45 to DB25 female serial cable, 1.5 m |
| CBL-RJ45F9-150 | 8-pin RJ45 to DB9 female serial cable, 1.5m |

Wall-Mounting Kits

| | |
|----------|--|
| WK-35-05 | Wall-mounting kit with 2 plates (35 x 44 x 2.5 mm), 6 NYLOK screws |
|----------|--|

© Moxa Inc. All rights reserved. Updated Jan 18, 2025.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.