UPort 1200/1400/1600シリーズ

2～16ポートRS-232、RS-422/485、およびRS-232/422/485 USB - シリアルコンバータ

機能と特長

- 最大480 MbpsのUSBデータ伝送速度を実現するHi-Speed USB 2.0
- 高速データ転送最大ボーレート921.6 kbps
- Windows、Linux、macOS用のReal COMとTTYドライバー
- 配線が簡単なMini-DB9メス- ターミナルブロックアダプタ
- USBおよびTxD/RxDアクティビティを示すLED
- 2 kV絶縁保護（「-I」モデルの場合）

認証

製品紹介

UPort® 1200/1400/1600シリーズのUSB - シリアルコンバータは、シリアルポートを備えていないラップトップやワークステーションコンピュータに最適なアクセサリです。これらは、現場でさまざまなシリアル デバイスを接続したり、標準COMポートやDB9コネクタのないデバイス用に個別のインターフェースコンバータを必要とするエンジニアにとって不可欠です。

UPort® 1200/1400/1600シリーズは、USBをRS-232/422/485に変換します。すべての製品は従来のシリアルデバイスと互換性があり、計測機器やPOSアプリケーションで使用できます。

仕様

USB Interface

Speed	12 Mbps, 480 Mbps
USB Connector	USB Type B
USB Standards	USB 1.1/2.0 compliant

Serial Interface

No. of Ports	UPort 1200 Models: 2 UPort 1400 Models: 4 UPort 1600-8 Models: 8 UPort 1600-16 Models: 16
Connector	DB9 male
Baudrate	50 bps to 921.6 kbps
Data Bits	5, 6, 7, 8
Stop Bits	1, 1.5, 2
Parity	None, Even, Odd, Space, Mark
Flow Control	None RTS/CTS XON/XOFF

Isolation	2 kV (I models)
Serial Standards	UPort 1410/1610-8/1610-16: RS-232 UPort 1250/1250I/1450/1650-8/1650-16: RS-232, RS-422, RS-485

Serial Signals

RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND

Serial Software Features

Windows Drivers	Windows 11/10/8.1/8/7/Vista/XP/ME/98/95 Windows Server 2022/2019/2016/2012 R2/2012/2008 R2/2008/2003/2000/NT
Linux Drivers	Kernel versions: 6.x, 5.x, 4.x, 3.x, 2.6.x and 2.4.x
Mac Drivers	macOS versions: 10.12 to 10.15, 11.x
Virtual Machine	VMware Fusion (Windows on macOS 10.12 to 11.x) VMWare ESXi (Linux kernel 4) Parallels Desktop (Windows on macOS 10.12 to 11.x)
Arm®-based Platform Support	Linux kernel 5.x / 4.x
Android API	Android 3.1.x and later

Power Parameters

Input Voltage	UPort 1250/1410/1450: 5 VDC[1] UPort 1250I/1400/1600-8 Models: 12 to 48 VDC UPort 1600-16 Models: 100 to 240 VAC
Input Current	UPort 1250: 360 mA @ 5 VDC UPort 1250I: 200 mA @ 12 VDC UPort 1410/1450: 260 mA @ 12 VDC UPort 1450I: 360 mA @ 12 VDC UPort 1610-8/1650-8: 580 mA @ 12 VDC UPort 1600-16 Models: 220 mA @ 100 VAC

Physical Characteristics

Housing	Metal
Dimensions	UPort 1250/1250I: 77 x 26 x 111 mm (3.03 x 1.02 x 4.37 in) UPort 1410/1450/1450I: 204 x 30 x 125 mm (8.03 x 1.18 x 4.92 in) UPort 1610-8/1650-8: 204 x 44 x 125 mm (8.03 x 1.73 x 4.92 in) UPort 1610-16/1650-16: 440 x 45.5 x 198.1 mm (17.32 x 1.79 x 7.80 in)
Weight	UPort 1250/1250I: 180 g (0.40 lb) UPort 1410/1450/1450I: 720 g (1.59 lb) UPort 1610-8/1650-8: 835 g (1.84 lb) UPort 1610-16/1650-16: 2,475 g (5.45 lb)

Environmental Limits

Storage Temperature (package included)	-20 to 75°C (-4 to 167°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Operating Temperature	UPort 1200 Models: 0 to 60°C (32 to 140°F) UPort 1400//1600-8/1600-16 Models: 0 to 55°C (32 to 131°F)

1. UPort 1410/1450モデル: USBポート電源の場合は5V、外部電源アダプタの場合は12V

Standards and Certifications

EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV IEC 61000-4-5 Surge: Power: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m IEC 61000-4-8 PFMF
Safety	UPort 1200 /1600-16 Models : UL 60950-1 UPort 1400 /1600-8 Models : UL/IEC 62368-1

Declaration

Green Product	RoHS, CRoHS, WEEE

MTBF

Time	UPort 1250/1250I: 563,179 hrs UPort 1410: 394,441 hrs UPort 1450/1450I: 546,770 hrs UPort 1610-8: 208,413 hrs UPort 1650-8: 186,567 hrs UPort 1610-16: 138,704 hrs UPort 1650-16: 120,001 hrs
Standards	UPort 1250/1250I/1410/1450/1450I: Telcordia (Bellcore) Standard UPort 1610-8/1650-8/1610-16/1650-16: MIL-HDBK-217F

Warranty

Warranty Period	5 years
Details	See www.moxa.com/warranty

Package Contents

Device	1 x UPort 1200/1400/1600 Series USB-to-serial converter
Cable	1 x USB type A male to USB type B male
Connectors	1 x Mini DB9F-to-TB (UPort 1250/1450/1650 models)
Power Supply	1 x power adapter, universal (UPort 1250I/1450/1450I/1600-8) 1 x power cord (UPort 1600-16)
Installation Kit	1 x rack-mounting ear (UPort 1600-16 models)
Documentation	1 x quick installation guide 1 x warranty card

寸法

UPort 1250

単位：mm（インチ）

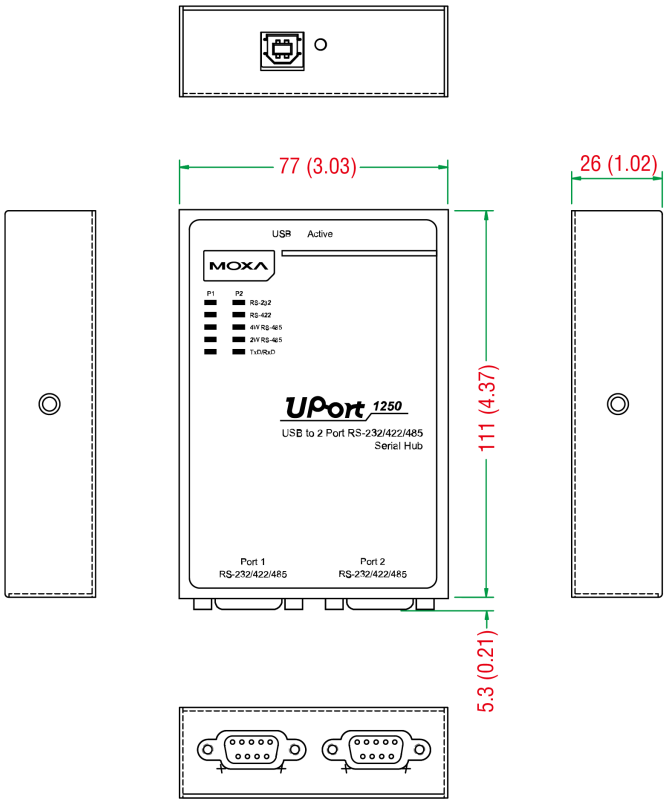

UPort 1250I

単位：mm（インチ）

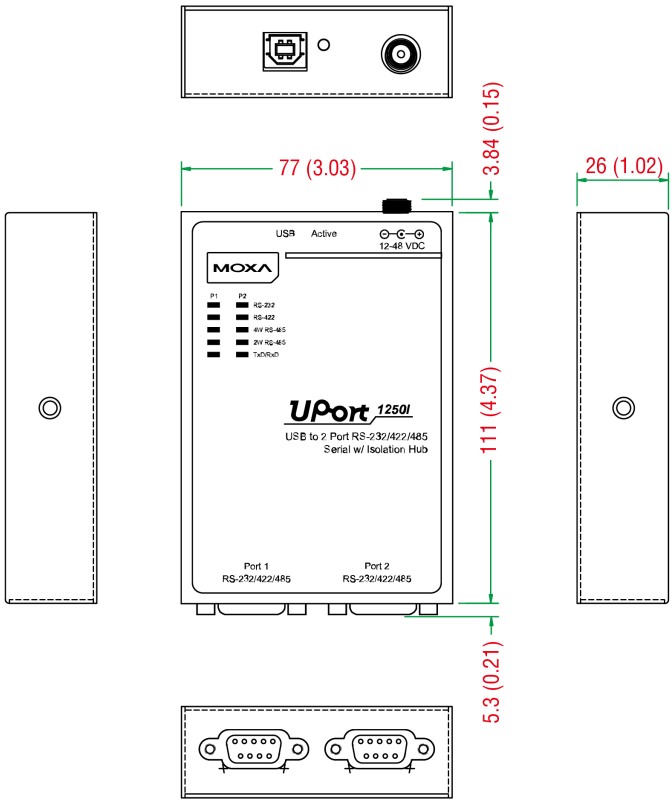

UPort 1410/1450

単位：mm（インチ）

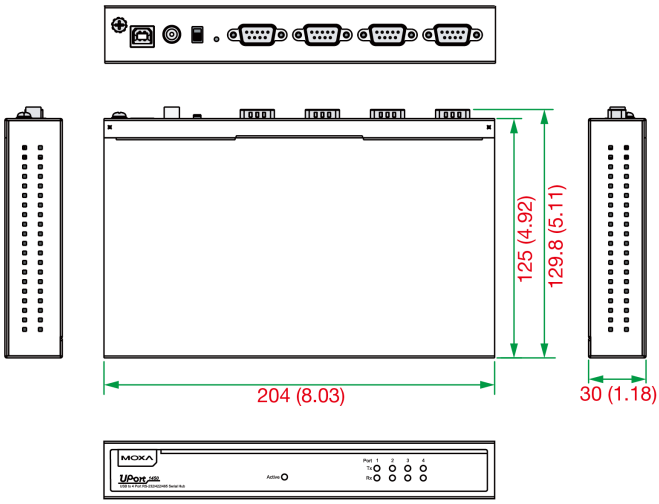

UPort 1450I

単位：mm（インチ）

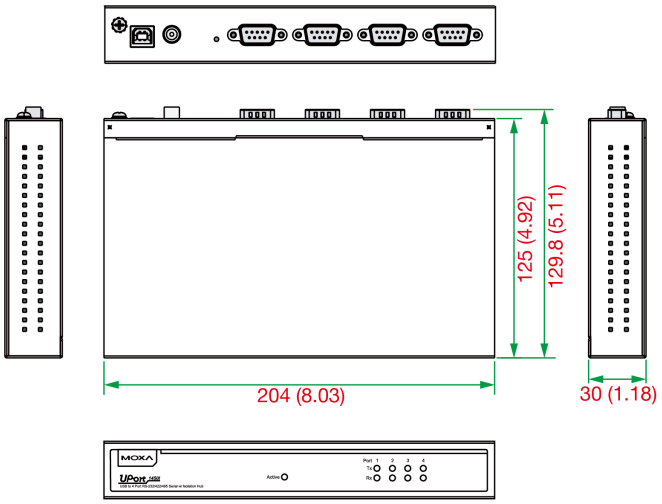

UPort 1610–8/1650–8

単位：mm（インチ）

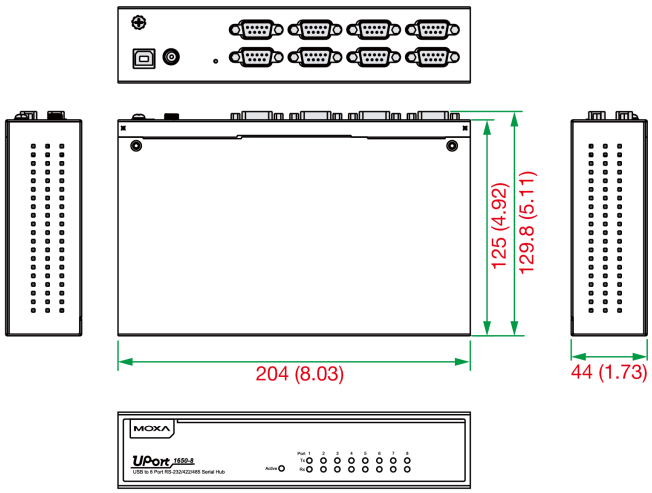

UPort 1610–16/1650–16

単位：mm（インチ）

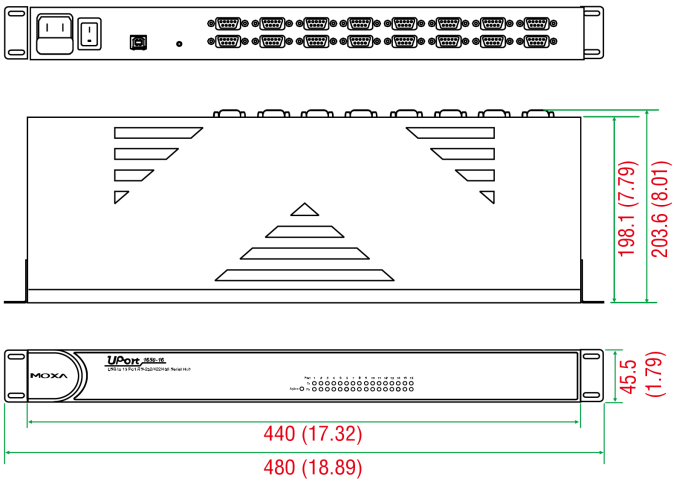

注文情報

Model Name	USB Interface	Serial Standards	No. of Serial Ports	Isolation	Housing Material	Operating Temp.
UPort 1250	USB 2.0	RS-232/422/485	2	–	Metal	0 to 55°C
UPort 1250I	USB 2.0	RS-232/422/485	2	2 kV	Metal	0 to 55°C
UPort 1410	USB 2.0	RS-232	4	–	Metal	0 to 55°C
UPort 1450	USB 2.0	RS-232/422/485	4	–	Metal	0 to 55°C
UPort 1450I	USB 2.0	RS-232/422/485	4	2 kV	Metal	0 to 55°C
UPort 1610-8	USB 2.0	RS-232	8	–	Metal	0 to 55°C
UPort 1650-8	USB 2.0	RS-232/422/485	8	–	Metal	0 to 55°C
UPort 1610-16	USB 2.0	RS-232	16	–	Metal	0 to 55°C
UPort 1650-16	USB 2.0	RS-232/422/485	16	–	Metal	0 to 55°C

アクセサリー（別売）

Cables

CBL-USBA/B-100	USB 2.0 cable, type A-to-type B, 1 m
CN20070	10-pin RJ45 to DB9 female serial cable
NP21101	DB25 male to DB9 female cable for RS-232 transmission, 30 cm
CBL-F9M9-20	DB9 female to DB9 male serial cable, 20 cm
CBL-F9M9-150	DB9 female to DB9 male serial cable, 1.5 m
CBL-RJ45SF9-150	8-pin RJ45 to DB9 female serial cable with shielding, 1.5m

Connectors

Mini DB9F-to-TB	DB9 female to terminal block connector
ADP-RJ458P-DB9F	DB9 female to RJ45 connector
A-ADP-RJ458P-DB9F-ABC01	DB9 female to RJ45 connector for the ABC-01 Series

Mounting Kits

DK-UP1200	DIN rail (25x48.3 mm) with 2 screws (FMS M3X6) Applicable Models: UPort 1250

	UPort 1250I
DK-UP1400	DIN-rail/wall-mounting kit, 2 plates, 6 screws, and 2 DIN-rail plates, 4 screws Applicable Models: UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8

DIN-Rail Mounting Kits

DK-UP-14168	DIN-rail kit with 2 plates (89 x 19 mm), 6 screws (FMS M3 x 5 mm) for the UPort 1400 (V1.5.0 and after) and 1600-8 (V1.4.0 and after) models Applicable Models: UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8

Wall-Mounting Kits

WK-35-02	Wall-mounting kit with 2 plates (35 x 24 x 1.2 mm) and 6 screws Applicable Models: UPort 1250 UPort 1250I
WK-35-01	Wall-mounting kit with 2 plates (35 x 44 x 2.5 mm) and 6 screws Applicable Models: UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8
WK-UP-14168	Wall-mounting kit with 2 plates (35 x 44 mm), 6 screws (FMS M3 x 4 mm) for the UPort 1400 and 1600-8 models Applicable Models: UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8

Rack-Mounting Kits

WK-45-01	Rack-mounting kit, 2 L-shaped plates, 6 screws, 45 x 57 x 2.5 mm Applicable Models: UPort 1610-16 UPort 1650-16

Power Adapters

PWR-12150-WP-S4	Locking barrel plug with 12 VDC, 1.5 A, 100 to 240 VAC, without plug, 0 to 40°C operating temperature Applicable Models: UPort 1250 UPort 1250I UPort 1410 UPort 1450 UPort 1450I UPort 1610-8 UPort 1650-8

Power Cords

PWC-C13EU-3B-183	Power cord with EU/KR plug, 1.83 m Applicable Models:

	UPort 1610-16 UPort 1650-16
PWC-C13US-3B-183	Power cord with US plug, 1.83 m Applicable Models: UPort 1610-16 UPort 1650-16
PWC-C13CN-3B-183	Power cord with three-prong CN plug, 1.83 m Applicable Models: UPort 1610-16 UPort 1650-16
PWC-C13JP-3B-183	Power cord with JP plug plug, 7A/125V, 1.83 m Applicable Models: UPort 1610-16 UPort 1650-16
PWC-C13UK-3B-183	Power cord with UK plug, 1.83 m Applicable Models: UPort 1610-16 UPort 1650-16
PWC-C13AU-3B-183	Power cord with AU plug, 1.83 m Applicable Models: UPort 1610-16 UPort 1650-16

© Moxa Inc. All rights reserved.2023年5月17日更新。

Moxa Inc.の明白な許可を書面で取得しない限り、本書およびその一部の複製や使用はいかなる方法やいかなる場合でも許可されません。製品の仕様は予告なく変更されることがあります。最新の製品情報については当社のWebサイトをご覧ください。