

CM-600 模組系列

EDS-600 系列適用的 4 埠快速乙太網路介面模組



特色與優點

- 模組化設計，採用 4 埠銅線/光纖組合
- 可熱交換的媒體模組，允許連續運作

認證



簡介

CM-600 模組系列專為搭配 EDS-600 系列使用而設計。CM-600 系列採用小巧的模組化設計，單插槽可容納 4 x 連接埠，支援多種媒體類型，包括 TX、MSC、SSC 和 MST。CM-600-4TX-BP 模組支援每個連接埠上的旁路繼電器功能，而 CM-600-4TX-PTP 模組則支援每個連接埠上的硬體 IEEE 1588 PTPv2 通訊協定。模組化設計可確保 EDS-600 系列符合多種應用需求。

規格

Ethernet Interface

10/100BaseT(X) Ports (RJ45 connector)	CM-600-4TX: 4 CM-600-4TX-BP: 4, with bypass relay CM-600-4TX-PTP: 4, with hardware-based PTP CM-600-1TX Series: 1 CM-600-2TX Series: 2 All models support: Auto negotiation speed Full/Half duplex mode Auto MDI/MDI-X connection
100BaseFX Ports (multi-mode SC connector)	CM-600-4MSC: 4 CM-600-3MSC/1TX: 3 CM-600-2MSC/2TX: 2
100BaseFX Ports (multi-mode ST connector)	CM-600-4MST: 4 CM-600-3MST/1TX: 3 CM-600-2MST/2TX: 2
100BaseFX Ports (single-mode SC connector)	CM-600-4SSC: 4 CM-600-3SSC/1TX: 3 CM-600-2SSC/2TX: 2

Time Management	CM-600-4TX-PTP: IEEE 1588v2 PTP (hardware-based)			
Optical Fiber	100BaseFX			
	Multi-Mode		Single-Mode	
	Fiber Cable Type	OM1	50/125 μ m	G.652
			800 MHz x km	
	Typical Distance		4 km	5 km
	Wavelength	Typical (nm)		1300
		TX Range (nm)		1260 to 1360
		RX Range (nm)		1100 to 1600
	Optical Power	TX Range (dBm)		-10 to -20
		RX Range (dBm)		-3 to -32
		Link Budget (dB)		12
		Dispersion Penalty (dB)		3
<p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the "typical distance" of a specific fiber transceiver as follows: Link budget (dB) > dispersion penalty (dB) + total link loss (dB).</p>				

Power Parameters

Power Consumption	CM-600-4TX: 0.61 W (max.) CM-600-2TX models: 1.56 W (max.) CM-600-1TX models: 2 W (max.) CM-600-4MSC/4MST/4SSC: 2.44 W (max.) CM-600-4TX-PTP: 3.46 W (max.) CM-600-4TX-BP: 2.38 W (max.)
-------------------	---

Physical Characteristics

IP Rating	IP30
Dimensions	29.7 x 144.4 x 144.8 mm (1.17 x 5.69 x 5.7 in)
Weight	CM-600-4TX: 190 g (0.42 lb) CM-600/1TX, CM-600/2TX models: 230 g (0.51 lb) CM-600-4MSC/4MST/4SSC/4TX-BP: 240 g (0.53 lb) CM-600-4TX-PTP: 185 g (0.41 lb)

Environmental Limits

Operating Temperature	-40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

MTBF

Time	740,661 hrs
Standards	Telcordia (Bellcore), GB

Warranty


Warranty Period	5 years
Details	See www.moxa.com/tw/warranty

Package Contents

Device	1 x CM-600 Series module
Documentation	1 x warranty card

尺寸

單位：公釐（英吋）

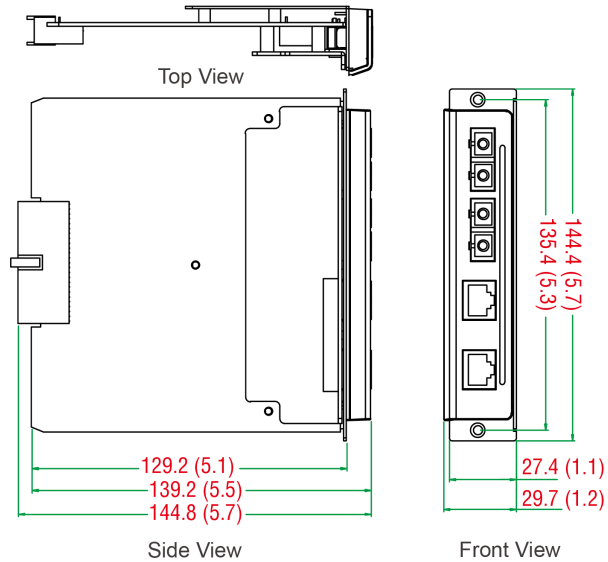

訂購資訊

Model Name	10/100BaseT(X) Ports RJ45 Connector	100BaseFX Ports Multi-Mode SC Connector	100BaseFX Ports Multi-Mode ST Connector	100BaseFX Ports Single-Mode SC Connector	Operating Temp.
CM-600-4TX	4	-	-	-	-40 to 75°C
CM-600-4TX-BP	4, with bypass relay	-	-	-	-40 to 75°C
CM-600-4TX-PTP	4, with hardware-based PTP	-	-	-	-40 to 75°C
CM-600-4MSC	-	4	-	-	-40 to 75°C
CM-600-4MST	-	-	4	-	-40 to 75°C
CM-600-4SSC	-	-	-	4	-40 to 75°C
CM-600-3MSC/1TX	1	3	-	-	-40 to 75°C
CM-600-3MST/1TX	1	-	3	-	-40 to 75°C
CM-600-3SSC/1TX	1	-	-	3	-40 to 75°C
CM-600-2MSC/2TX	2	2	-	-	-40 to 75°C
CM-600-2MST/2TX	2	-	2	-	-40 to 75°C
CM-600-2SSC/2TX	2	-	-	2	-40 to 75°C

© Moxa Inc. 版權所有. 2018 年 10 月 12 日更新。

未經 Moxa Inc. 明確書面許可，不得以任何方式複製或使用本文件及其任何部分。產品規格如有變更，恕不另行通知。請至本公司官網了解最新的產品資訊。