

EDS-P206Aシリーズ

6ポートアンマネージド・イーサネット・スイッチ、4 IEEE 802.3af/at PoE+ポート付き



機能とメリット

- IEEE 802.3af/at準拠のPoEおよびEthernetコンボポート
- PoEポートあたり最大30 Wの出力
- 12/24/48 VDC冗長電源入力
- インテリジェントな電力消費の検出と分類
- 冗長なデュアルVDC電源入力
- -40～75°Cの動作温度範囲（-Tモデル）

認証



製品紹介

EDS-P206A-4PoEスイッチはスマートな6ポートアンマネージド・イーサネット・スイッチで、ポート1から4でPoE（Power-over-Ethernet）をサポートします。スイッチは、給電装置(PSE)として分類され、このように使用される場合、EDS-P206A-4PoEスイッチは、電源の集中化を可能にし、ポート当たり30 Wまでの電力を提供します。

このスイッチは、電力IEEE 802.3af/at準拠デバイス（PD）に電力を供給するために使用でき、追加の配線が必要なくなります。10/100M、全二重通信/半二重通信、MDI/MDI-XのオートセンシングによりIEEE 802.3/802.3u/802.3xをサポートし、産業用イーサネットネットワーク用の経済的なソリューションを提供します。

仕様

Ethernet Interface

10/100BaseT(X) Ports (RJ45 connector)	EDS-P206A-4PoE Series: 2 EDS-P206A-4PoE-M-SC/M-ST/S-SC Series: 1 Supported functions: Auto negotiation speed Full/Half duplex mode Auto MDI/MDI-X connection
100BaseFX Ports (multi-mode SC connector)	EDS-P206A-4PoE-M-SC Series: 1 EDS-P206A-4PoE-MM-SC Series: 2
100BaseFX Ports (multi-mode ST connector)	EDS-P206A-4PoE-M-ST Series: 1 EDS-P206A-4PoE-MM-ST Series: 2
100BaseFX Ports (single-mode SC connector)	EDS-P206A-4PoE-S-SC/P206A-4PoE-S-SC-T: 1 EDS-P206A-4PoE-SS-SC/P206A-4PoE-SS-SC-T: 2
PoE Ports (10/100BaseT(X), RJ45 connector)	4
Standards	IEEE 802.3 for 10BaseT IEEE 802.3af/at for PoE/PoE+ output IEEE 802.3x for flow control IEEE 802.3u for 100BaseT(X)

PoE Pinout	V+, V+, V-, V- for pins 1, 2, 3, 6 (Endspan, MDI, Mode A)			
Optical Fiber				
			100BaseFX	
			Multi-Mode	Single-Mode
	Fiber Cable Type		OM1	50/125 μm
				800 MHz x km
	Typical Distance		4 km	5 km
	Wavelength	Typical (nm)	1300	1310
		TX Range (nm)	1260 to 1360	1280 to 1340
		RX Range (nm)	1100 to 1600	1100 to 1600
	Optical Power	TX Range (dBm)	-10 to -20	0 to -5
		RX Range (dBm)	-3 to -32	-3 to -34
		Link Budget (dB)	12	29
		Dispersion Penalty (dB)	3	1
	Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power. Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) > dispersion penalty (dB) + total link loss (dB).			

Switch Properties

Packet Buffer Size	768 kbits
MAC Table Size	2 K
Processing Type	Store and Forward

Power Parameters

Input Current	5.55 A @ 24 VDC
Connection	1 removable 4-contact terminal block(s)
Operating Voltage	12 to 57 VDC
Input Voltage	12/24/48 VDC, Redundant dual inputs
Power Budget	Max. 120 W for total PD consumption Max. 30 W for each PoE port
Power Consumption (Max.)	Max. 13.2 W full loading without PDs' consumption
Reverse Polarity Protection	Supported
Overload Current Protection	Supported

Physical Characteristics

Housing	Metal
IP Rating	IP30
Dimensions	50.3 x 114 x 70 mm (1.98 x 4.53 x 2.76 in)
Weight	375 g (0.83 lb)
Installation	DIN-rail mounting, Wall mounting (with optional kit)

Environmental Limits

Operating Temperature	Standard Models: -10 to 60°C (14 to 140°F) Wide Temp. Models: -40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

EMI	CISPR 32, FCC Part 15B Class A
EMC	EN 55032/24
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Safety	UL 508

MTBF

Time	1,398,743 hrs
Standards	Telcordia (Bellcore), GB

Warranty


Warranty Period	5 years
Details	See www.moxa.com/jp/warranty

Package Contents

Device	1 x EDS-P206A Series switch
Installation Kit	4 x cap, plastic, for RJ45 port
Documentation	1 x quick installation guide 1 x warranty card

寸法

単位：mm（インチ）

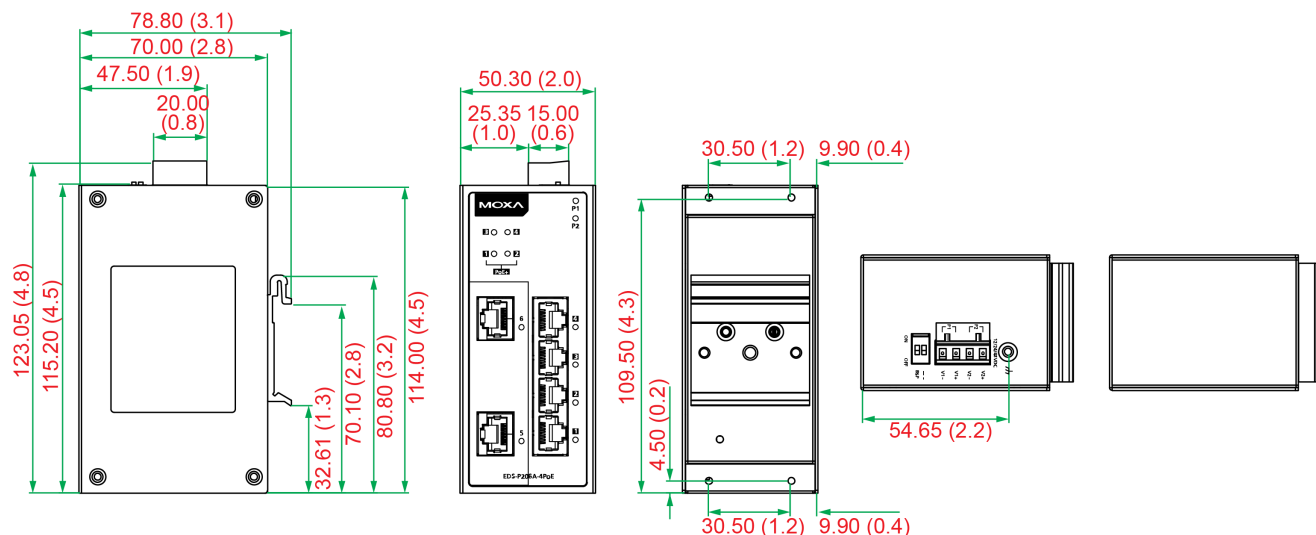

側面図

前面図

背面図

上面図と底面図

注文情報

Model Name	10/100BaseT(X) Ports RJ45 Connector	PoE Ports, 10/ 100BaseT(X) RJ45 Connector	100BaseFX Ports Multi-Mode, SC Connector	100BaseFX Ports Multi-Mode, ST Connector	100BaseFX Ports Single-Mode, SC Connector	Operating Temp.
EDS-P206A-4PoE	2	4	–	–	–	-10 to 60°C
EDS-P206A-4PoE-T	2	4	–	–	–	-40 to 75°C
EDS-P206A-4PoE-M-SC	1	4	1	–	–	-10 to 60°C
EDS-P206A-4PoE-M-SC-T	1	4	1	–	–	-40 to 75°C
EDS-P206A-4PoE-M-ST	1	4	–	1	–	-10 to 60°C
EDS-P206A-4PoE-M-ST-T	1	4	–	1	–	-40 to 75°C
EDS-P206A-4PoE-MM-SC	–	4	2	–	–	-10 to 60°C
EDS-P206A-4PoE-MM-SC-T	–	4	2	–	–	-40 to 75°C
EDS-P206A-4PoE-MM-ST	–	4	–	2	–	-10 to 60°C
EDS-P206A-4PoE-MM-ST-T	–	4	–	2	–	-40 to 75°C
EDS-P206A-4PoE-S-SC	1	4	–	–	1	-10 to 60°C
EDS-P206A-4PoE-S-SC-T	1	4	–	–	1	-40 to 75°C
EDS-P206A-4PoE-SS-SC	–	4	–	–	2	-10 to 60°C
EDS-P206A-4PoE-SS-SC-T	–	4	–	–	2	-40 to 75°C

アクセサリ（別売）

Power Supplies

DR-120-24	120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature
DR-75-24	75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature
DR-120-48	120W/2.5A DIN-rail 48 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature
DR-75-48	75W/1.6A DIN-rail 48 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature
DRP-240-48	DIN-rail 48 VDC power supply with 240W/5A, 85 to 264 VAC, or 120 to 370 VDC input, -10 to 70°C operating temperature

Wall-Mounting Kits

WK-46	Wall-mounting kit, 2 plates, 8 screws, 46.5 x 66.8 x 1 mm
-------	---

Rack-Mounting Kits

RK-4U	19-inch rack-mounting kit
-------	---------------------------

© Moxa Inc. All rights reserved.2018年11月12日更新。

Moxa Inc.の明白な許可を written で取得しない限り、本書およびその一部の複製や使用はいかなる方法やいかなる場合でも許可されません。製品の仕様は予告なく変更されることがあります。最新の製品情報については当社のWebサイトをご覧ください。