

ICF-1150 系列

工業 RS-232/422/485 轉光纖轉換器



特色與優點

- 3 向通訊：RS-232、RS-422/485 與光纖
- 旋轉開關以變更上拉/下拉電阻值
- 將 RS-232/422/485 傳輸延伸至最遠達 40 公里（使用單模）或 5 公里（使用多模）
- 提供 -40 至 85°C 寬溫度範圍型號
- 通過 C1D2、ATEX 與 IECEx 認證，適用於嚴峻工業環境

認證



簡介

ICF-1150 串列到光纖轉換器將 RS-232/RS-422/RS-485 訊號傳輸至光纖連接埠，以增加傳輸距離。當 ICF-1150 裝置從任何串列埠收到資料時，會透過光纖連接埠傳送資料。這些產品不僅支援適用於不同傳輸距離的單模和多模光纖，還提供具有隔離保護的型號，以提高抗擾性。ICF-1150 產品具有三向通訊與旋轉開關，用於設定現場安裝的上拉/下拉電阻。

三向通訊

ICF-1150 系列支援 2 個串列埠，具有用於 RS-232 通訊的 DB9 連接器和用於 RS-422 或 RS-485 通訊的可拆卸接線端子模組。3 個連接埠（2 個串列埠和一個光纖連接埠）完全獨立。當 ICF-1150 轉換器從任何一個連接埠收到資料時，會透過其他 2 個連接埠傳送資料。例如，ICF-1150 轉換器透過光纖連接埠從遠端主控裝置接收到指令後，它將轉換訊號，並同時透過 RS-232 與 RS-422/485 連接埠傳送指令。如果使用者正在監控在 RS-485 網路上執行的系統，則不需要使用其他 RS-232 到 RS-485 轉換器將筆記型電腦的串列埠連接到 RS-485 匯流排。

用於設定上拉/下拉電阻的旋轉開關

RS-485 介面支援 Multidrop 或鏈接式連接，系統工程師將使用該連接在相同匯流排上將儀表、RTU 和讀取器等串列裝置連接在一起。由於相同匯流排上的串列裝置數量會導致資料線的阻抗增加，因此，ICF-1150 可讓使用者調整上拉/下拉電阻。只需將開關旋轉到適當的值，而無需從 DIN 軌道上拆下 ICF-1150。

規格

Serial Interface

No. of Ports	2
Serial Standards	RS-232 RS-422 RS-485
Baudrate	50 bps to 921.6 kbps (supports non-standard baudrates)
Flow Control	ADDC (automatic data direction control) for RS-485
Connector	DB9 female for RS-232 interface 5-pin terminal block for RS-422/485 interface Fiber ports for RS-232/422/485 interface
Isolation	2 kV (I models)

Optical Fiber	Low-Speed Fiber Module		Multi-Mode	Single-Mode
	Fiber Cable Requirements		50/125 μm, 800 MHz	G.652
			62.5/125 μm, 500 MHz	
	Typical Distance		5 km	40 km
	Wavelength	Typical (nm)	850	1310
		TX Range (nm)	840 to 860	1290 to 1330
		RX Range (nm)	800 to 900	1100 to 1650
	Optical Power	TX Range (dBm)	0 to -8	0 to -8
		RX Range (dBm)	0 to -25	0 to -25
		Link Budget (dB)	15	20
		Dispersion Penalty (dB)	1	1
Note: When using a power meter to measure the fiber TX power, set the baudrate to 9,600 bps and send data (00, ..., 0h) to the serial converter's serial port.				
Pull High/Low Resistor for RS-485	150 kilo-ohm, 10 kilo-ohm, 4.7 kilo-ohm, 3.3 kilo-ohm, 1 kilo-ohm, 909 ohm, 822 ohm, 770 ohm, 500 ohm, 485 ohm			
RS-485 Data Direction Control	ADDC (automatic data direction control)			
Terminator for RS-485	N/A, 120 ohms, 120 kilo-ohms			

Serial Signals

RS-232	TxD, RxD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND

Power Parameters

Input Current	ICF-1150 Series: 264 mA @ 12 to 48 VDC ICF-1150I Series: 300 mA @ 12 to 48 VDC
Input Voltage	12 to 48 VDC
No. of Power Inputs	1
Overload Current Protection	Supported
Power Connector	Terminal block
Power Consumption	ICF-1150 Series: 264 mA @ 12 to 48 VDC ICF-1150I Series: 300 mA @ 12 to 48 VDC

Physical Characteristics

Housing	Metal
IP Rating	IP30
Dimensions	30.3 x 70 x 115 mm (1.19 x 2.76 x 4.53 in)
Weight	330 g (0.73 lb)
Installation	DIN-rail mounting

Environmental Limits

Operating Temperature	Standard Models: 0 to 60°C (32 to 140°F) Wide Temp. Models: -40 to 85°C (-40 to 185°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 4 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF
Environmental Testing	IEC 60068-2-1 IEC 60068-2-2 IEC 60068-2-3
Safety	UL 61010-2-201
Vibration	IEC 60068-2-6
Hazardous Locations	IEX Models: UL/cUL Class I Division 2 Groups A/B/C/D, ATEX Zone 2, IECEx All Other Models: UL/cUL Class I Division 2 Groups A/B/C/D, ATEX Zone 2

MTBF

Time	792,085 hrs
Standards	Telcordia (Bellcore), GB

Warranty


Warranty Period	5 years
Details	See www.moxa.com/warranty

Package Contents

Device	1 x ICF-1150 Series converter
Documentation	1 x quick installation guide 1 x warranty card

尺寸

單位：公釐（英吋）

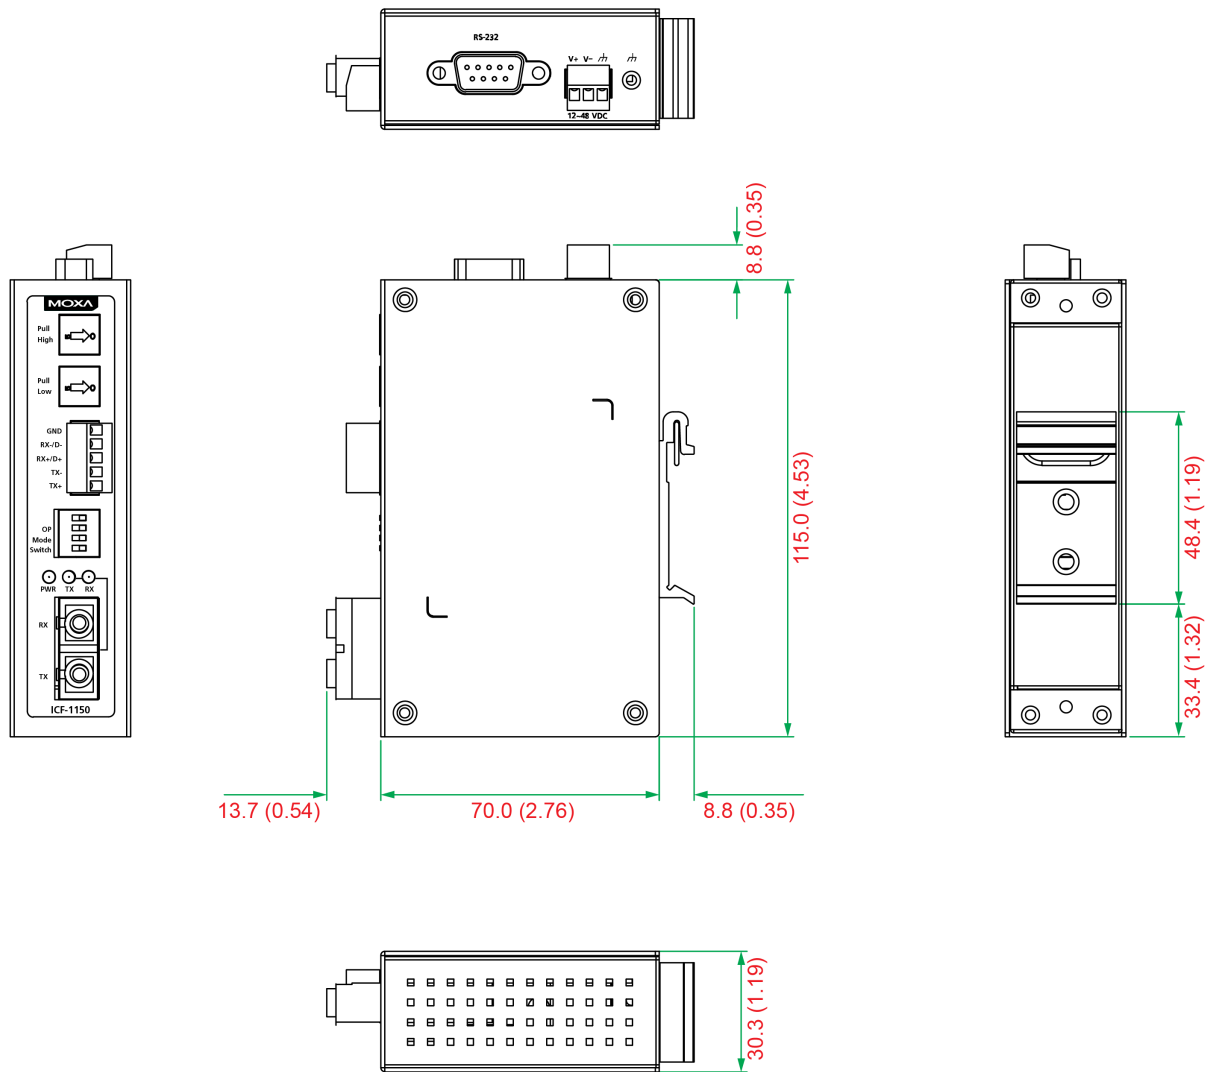

訂購資訊

Model Name	Isolation	Operating Temp.	Fiber Module Type	IECEx Supported
ICF-1150-M-ST	–	0 to 60°C	Multi-mode ST	–
ICF-1150-M-SC	–	0 to 60°C	Multi-mode SC	–
ICF-1150-S-ST	–	0 to 60°C	Single-mode ST	–
ICF-1150-S-SC	–	0 to 60°C	Single-mode SC	–
ICF-1150-M-ST-T	–	-40 to 85°C	Multi-mode ST	–
ICF-1150-M-SC-T	–	-40 to 85°C	Multi-mode SC	–
ICF-1150-S-ST-T	–	-40 to 85°C	Single-mode ST	–
ICF-1150-S-SC-T	–	-40 to 85°C	Single-mode SC	–
ICF-1150I-M-ST	2 kV	0 to 60°C	Multi-mode ST	–
ICF-1150I-M-SC	2 kV	0 to 60°C	Multi-mode SC	–
ICF-1150I-S-ST	2 kV	0 to 60°C	Single-mode ST	–
ICF-1150I-S-SC	2 kV	0 to 60°C	Single-mode SC	–
ICF-1150I-M-ST-T	2 kV	-40 to 85°C	Multi-mode ST	–

Model Name	Isolation	Operating Temp.	Fiber Module Type	IECEX Supported
ICF-1150I-M-SC-T	2 kV	-40 to 85°C	Multi-mode SC	–
ICF-1150I-S-ST-T	2 kV	-40 to 85°C	Single-mode ST	–
ICF-1150I-S-SC-T	2 kV	-40 to 85°C	Single-mode SC	–
ICF-1150-M-ST-IEX	–	0 to 60°C	Multi-mode ST	✓
ICF-1150-M-SC-IEX	–	0 to 60°C	Multi-mode SC	✓
ICF-1150-S-ST-IEX	–	0 to 60°C	Single-mode ST	✓
ICF-1150-S-SC-IEX	–	0 to 60°C	Single-mode SC	✓
ICF-1150-M-ST-T-IEX	–	-40 to 85°C	Multi-mode ST	✓
ICF-1150-M-SC-T-IEX	–	-40 to 85°C	Multi-mode SC	✓
ICF-1150-S-ST-T-IEX	–	-40 to 85°C	Single-mode ST	✓
ICF-1150-S-SC-T-IEX	–	-40 to 85°C	Single-mode SC	✓
ICF-1150I-M-ST-IEX	2 kV	0 to 60°C	Multi-mode ST	✓
ICF-1150I-M-SC-IEX	2 kV	0 to 60°C	Multi-mode SC	✓
ICF-1150I-S-ST-IEX	2 kV	0 to 60°C	Single-mode ST	✓
ICF-1150I-S-SC-IEX	2 kV	0 to 60°C	Single-mode SC	✓
ICF-1150I-M-ST-T-IEX	2 kV	-40 to 85°C	Multi-mode ST	✓
ICF-1150I-M-SC-T-IEX	2 kV	-40 to 85°C	Multi-mode SC	✓
ICF-1150I-S-ST-T-IEX	2 kV	-40 to 85°C	Single-mode ST	✓
ICF-1150I-S-SC-T-IEX	2 kV	-40 to 85°C	Single-mode SC	✓

配件（選購）

Power Supplies

DR-4524	45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature
---------	---

Cables

CBL-F9M9-20	DB9 female to DB9 male serial cable, 20 cm
CBL-F9M9-150	DB9 female to DB9 male serial cable, 1.5 m

© Moxa Inc. 版權所有.2022 年 11 月 8 日更新。

未經 Moxa Inc. 明確書面許可，不得以任何方式複製或使用本文件及其任何部分。產品規格如有變更，恕不另行通知。請至本公司官網了解最新的產品資訊。