

ioPAC 6500シリーズ（65M） I/Oモジュール

モジュール型プログラマブルIINコントローラ用I/OおよびTBモジュール



機能とメリット

- エラープルーフ設計により、誤った設置を防止
- ツール不要のハードウェア設置とホットスワップ設計により、運用効率を最大化
- 完全モジュラー設計により、導入の柔軟性を最大化

認証




製品紹介

ioPAC 6500シリーズ（Intelligent Integrated Node、IINとも呼ばれる）は、レイヤ2マネージドスイッチを内蔵した新世代のLinuxベースRTUです。ioPAC 6500シリーズは、Arm Cortex-A53クアッドコアCPUを搭載し、高いパフォーマンスを発揮します。


アローピンによるエラープルーフ設計

I/Oモジュールおよびターミナルブロック（TB）モジュールのアローピン設計により、誤った設置を防止します。各I/Oモジュールには、独自のTBアローIDを持つ専用のTBモジュールが用意されています。

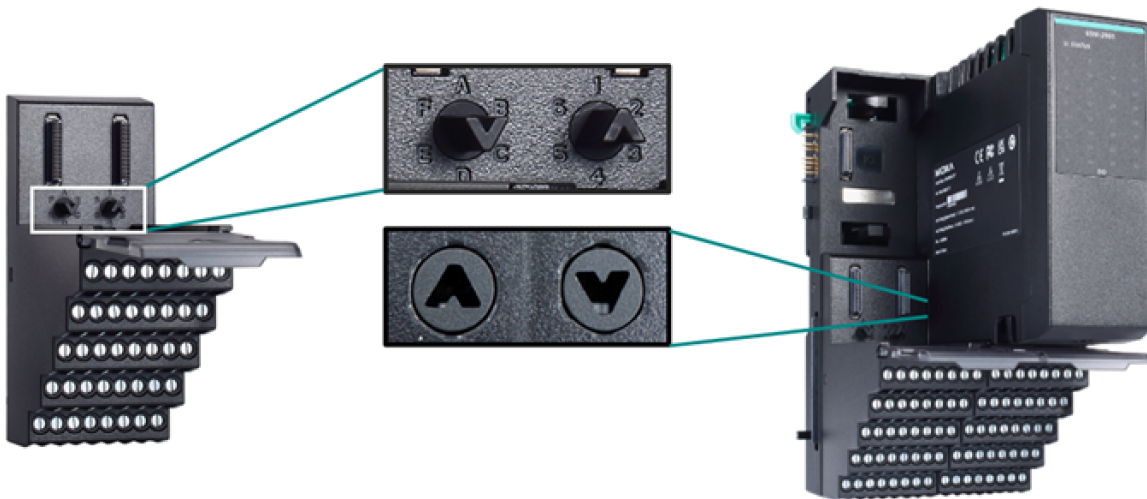

完全モジュラー設計

ioPAC 6500シリーズは、レゴのようなユニークな機械設計を特徴としており、設置の手間を最小限に抑えながら柔軟な導入を実現します。このシリーズは、以下のコンポーネントに分けられます：バックプレーンモジュール、電源モジュール、通信モジュール、拡張モジュール、CPUモジュール、I/Oモジュール、およびターミナルブロックモジュール。

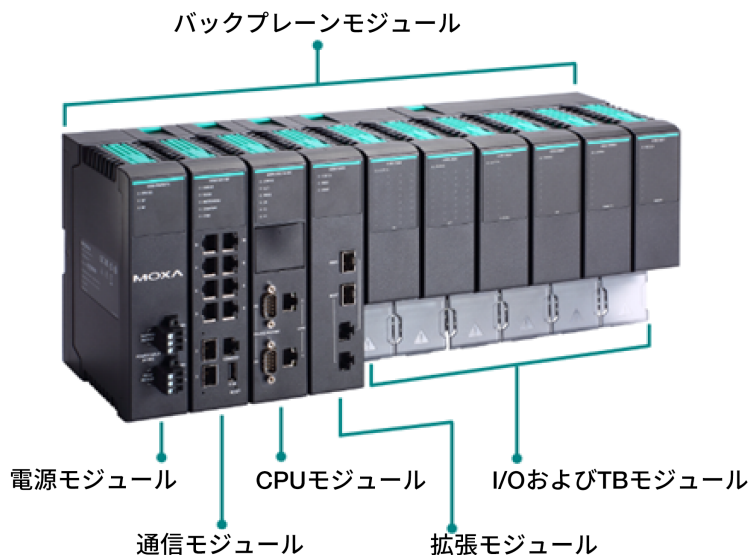

仕様

Input/Output Interface

Digital Input Channels	65M-1900-CT-T: 32
Digital Output Channels	65M-2901-CT-T: 32
Analog Input Channels	65M-3600-CT-T: 16 (current) 65M-3610-CT-T: 16 (voltage) 65M-3800H-CT-T: 8 (HART)
Analog Output Channels	65M-4820-CT-T: 8
Serial Channels	65M-5801-CT-T: 8
Isolation	65M-3600-CT-T/65M-3610-CT-T/65M-4820-CT-T/65M-5801-CT-T: - Between signal and system: 3k VDC - Between groups: 1k VDC per min All other models: - Between signal and system: 3k VDC

Digital Inputs

I/O Type	Sink (Internal/external field circuit supply for dry contact)
I/O Mode	DI or event counter (channels 1 to 8, group configurable by software)
Internal Field Circuit Supply Voltage	24 VDC 22.8 to 25.2 VDC
Internal Field Circuit Supply Current	125 mA (max.) (Only for dry contact)
Input Voltage	On: 11 to 30 VDC Off: 0 to 5 VDC
Input Current (voltage on)	2.35 mA $\pm$ 20% per channel
Counter Frequency	Square wave: 0 to 10 kHz
Digital Filtering Time Interval	Software configurable
Diagnostics	Input Wire-break Detection (current: 50 μ A max., delay: 20 ms) Internal Field Circuit Supply Detection (17.5 VDC, 16 to 19 VDC)

Digital Outputs

I/O Type	Source
I/O Mode	DO or pulse output (channel 1 to 8, group configurable by software)
Common Power Input Voltage	24 VDC 19.2 to 28.8 VDC
Common Power Input Current	6.4 A (max.)
Load Current	200 mA/channel (typ.) 500 mA/channel (max.)
Pulse Duration	500 μ s
Protection	Output Short-circuit Protection Common Power Input Over-voltage Protection Inductive Load Shutdown Voltage Protection
Diagnostics	Wire Break Detection (on state, output current < 3 mA) Wire Break Detection (off state, output load impedance > 58 kilo-ohms) Output Short-Circuit Detection (output current > 0.87 A, range: 0.64 to 1.2 A) External Power Detection (17.5 VDC, 16 to 19 VDC) Failsafe Configuration (hold last/failsafe state)

Analog Inputs

I/O Mode	65M-3600-CT-T: Current 65M-3610-CT-T: Voltage 65M-3800H-CT-T: HART
I/O Type	Differential
Input Range	65M-3600-CT-T: 0 to 20 mA 4 to 20 mA 65M-3610-CT-T: 0 to 10 V 1 to 5 V 65M-3800H-CT-T: 4 to 20 mA
Overload Permitted on Inputs	65M-3600-CT-T: ± 30 mA 65M-3610-CT-T: ± 12 V 65M-3800H-CT-T: 30 mA
Internal Loop Power Supply Current	65M-3600-CT-T: 200 mA / Group (max.) 65M-3800H-CT-T: 500 mA (max.) (only for 2-wire connection)
Internal Loop Power Supply Voltage	65M-3600-CT-T: 24 VDC 22.8 to 25.2 VDC
Converter Resolution	16 bits
Measurement Resolution	65M-3600-CT-T: 2 μ A (0 to 20 mA) 1.6 μ A (4 to 20 mA) 65M-3610-CT-T: 1 mV (0 to 10 V) 0.4 mV (1 to 5 V) 65M-3800H-CT-T: 1.6 μ A (4 to 20 mA)
Accuracy	$\pm 0.1\%$ FSR @ 25°C $\pm 0.3\%$ FSR @ -40 to 75°C

Conversion Time	100 ms
Rejection Ratio	Normal mode: > 60 dB @ 60 Hz (min.), conversion time: 100 ms Common mode: > 90 dB @ 60 Hz (min.), conversion time: 100 ms
Input Impedance	65M-3800H-CT-T: 250 ohms 65M-3600-CT-T: 250 ohms 65M-3610-CT-T: 1 mega-ohms
Diagnostics	65M-3800H-CT-T: Input Wire-break Input Short-circuit Input Underflow/Overflow Detection 65M-3600-CT-T: Internal Loop Power Detection (17.5 VDA, 16 to 19 VDC) Input Short-circuit Detection 65M-3600-CT-T (in 4 to 20 mA mode): Input Wire-break Detection (delay: 0.8 s) 65M-3610-CT-T: Input Wire-break Detection (delay:1.6 s max)

Analog Outputs

I/O Mode	Voltage/Current
Output Range	0 to 10 V 1 to 5 V 0 to 20 mA 4 to 20 mA
Converter Resolution	16-bit
Output Resolution	0.1 mV (0 to 10 V) 0.4 mV (1 to 5 V) 2 μ A (0 to 20 mA) 1.6 μ A (4 to 20 mA)
Accuracy	$\pm 0.1\%$ FSR @ 25°C $\pm 0.3\%$ FSR @ -40 to 75°C
Output Refresh Time	16 ms
Output Impedance	Voltage mode: 1 kilo-ohms (min.) Current mode: 750 ohms (max.)
Diagnostics	Output Short-circuit Detection (voltage) Failsafe Configuration (hold last/failsafe state) Output Wire-break Detection (current)

Serial Interface

Serial Standards	RS-232, RS-422, RS-485-2w
Baudrate	300, 600, 1200, 1800, 2400, 4800, 9600, 19200, 38400, 57600, and 115200 bps
Data Bits	7, 8
Stop Bits	1, 2
Parity	None Even Odd
Flow Control	RTS/CTS, XON/XOFF
Serial Signals	RS-232: TxD, RxD, RTS, CTS, GND RS-422: Tx+, Tx-, Rx+, Rx-, GND RS-485-2w: Data+, Data-, GND

Terminal Blocks

ID	65M-TB-1900-CT-T: D1 65M-TB-2901-CT-T: D2 65M-TB-3600-CT-T: A1 65M-TB-3610-CT-T: A2 65M-TB-3800H-CT-T: A3 65M-TB-4820-CT-T: A5 65M-TB-5801-CT-T: F1 Note: Terminal blocks need to be purchased separately. See the Accessories section/ list for details.
Connector	Screw-fastened terminal block
Dimensions	42.3 x 102.38 x 80.8 mm (1.67 x 4.03 x 3.18 in)
Weight	164 g (0.36 lb)

Power Consumption

System Power	65M-1900-CT-T/65M-2901-CT-T: 0.068 A @ 12 VDC 65M-3610-CT-T/65M-4820-CT-T: 0.069 A @ 12 VDC 65M-3600-CT-T: 0.073 A @ 12 VDC 65M-3800H-CT-T: 0.072 A @ 12 VDC 65M-5801-CT-T: 0.143 A @ 12 VDC
Field Power	65M-1900-CT-T: 0.019 A @ 24 VDC (without internal field circuit supply) 0.115 A @ 24 VDC (32-channel dry contact with internal field circuit supply) 65M-2901-CT-T: 0.005 A @ 24 VDC 65M-3600-CT-T: 0.053 A @ 24 VDC (without internal loop power) 0.466 A @ 24 VDC (16-channel 20 mA input with internal loop power) 65M-3610-CT-T: 0.038 A @ 24 VDC 65M-3800H-CT-T: 0.05 A (max.) @ 24 VDC (without internal loop power) 0.25 A (max.) @ 24 VDC (8-channel 4 to 20 mA input with internal loop power all in 20 mA) 0.66 A (max.) @ 24 VDC (500 mA input with internal loop power) 65M-4820-CT-T: 0.022 A @ 24 VDC (without external load) 0.266 A @ 24 VDC (4-channel 20 mA output) 65M-5801-CT-T: 0.11 A @ 24 VDC

Physical Characteristics

Housing	Plastic
Dimensions	42 x 116 x 130 mm (1.65 x 4.57 x 5.12 in)
Weight	65M-3610-CT-T: 250 g (0.55 lb) 65M-1900-CT-T: 253 g (0.56 lb) 65M-2901-CT-T: 254 g (0.56 lb) 65M-4820-CT-T: 257 g (0.57 lb) 65M-5801-CT-T: 259 g (0.57 lb) 65M-3800H-CT-T: 262 g (0.58 lb) 65M-3600-CT-T: 267 g (0.59 lb)

Environmental Limits

Operating Temperature	-40 to 75°C (-40 to 167°F) Note: Proper airflow is required in an environment with temperature > 65°C.
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)

Ambient Relative Humidity	5 to 95% (non-condensing)
Altitude	Up to 2000 meters ¹

Standards and Certifications

EMC	EN 55032/35 EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: (DC) 1 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: (DC) 0.5 kV L-N, 1 kV L/N-PE; Signal: 1 kV; IO: 0.5 kV IEC 61000-4-6 CS: Power: (DC) 10 V; Signal: 10 Vrms IEC 61000-4-8 PFMF: 30 A/m
Safety	UL 61010-1 UL 61010-2-201
Shock	IEC 60068-2-27 Half sine wave; acceleration: 15 g; time: 11 ms
Vibration	IEC 60068-2-6 DIN-rail mounted: 7 mm peak-peak (p-p) (2 to 8.42 Hz), 1 g (8.42 to 150 Hz) Rack mounted (with optional kit): 7 mm peak-peak (p-p) (2 to 8.42 Hz), 0.5 g (8.42 to 150 Hz)

MTBF

Time	65M-5801-CT-T: 2,310,512 hrs 65M-3610-CT-T: 1,885,953 hrs 65M-4820-CT-T: 1,874,152 hrs 65M-1900-CT-T: 2,057,118 hrs 65M-2901-CT-T: 2,007,795 hrs 65M-3600-CT-T: 1,686,798 hrs 65M-3800H-CT-T: 1,016,573 hrs
Standards	Telcordia Standard SR-332

Warranty

Warranty Period	5 years
Details	See www.moxa.com/jp/warranty

Package Contents


Device	1 x ioPAC 6500 Series (65M) I/O Module
Documentation	1 x quick installation guide 1 x warranty card

1. Please contact Moxa if you require products guaranteed to function properly at higher altitudes.

寸法


65M-1XXX/2XXX/3XXX/4XXX/5801モデル

単位：mm（インチ）

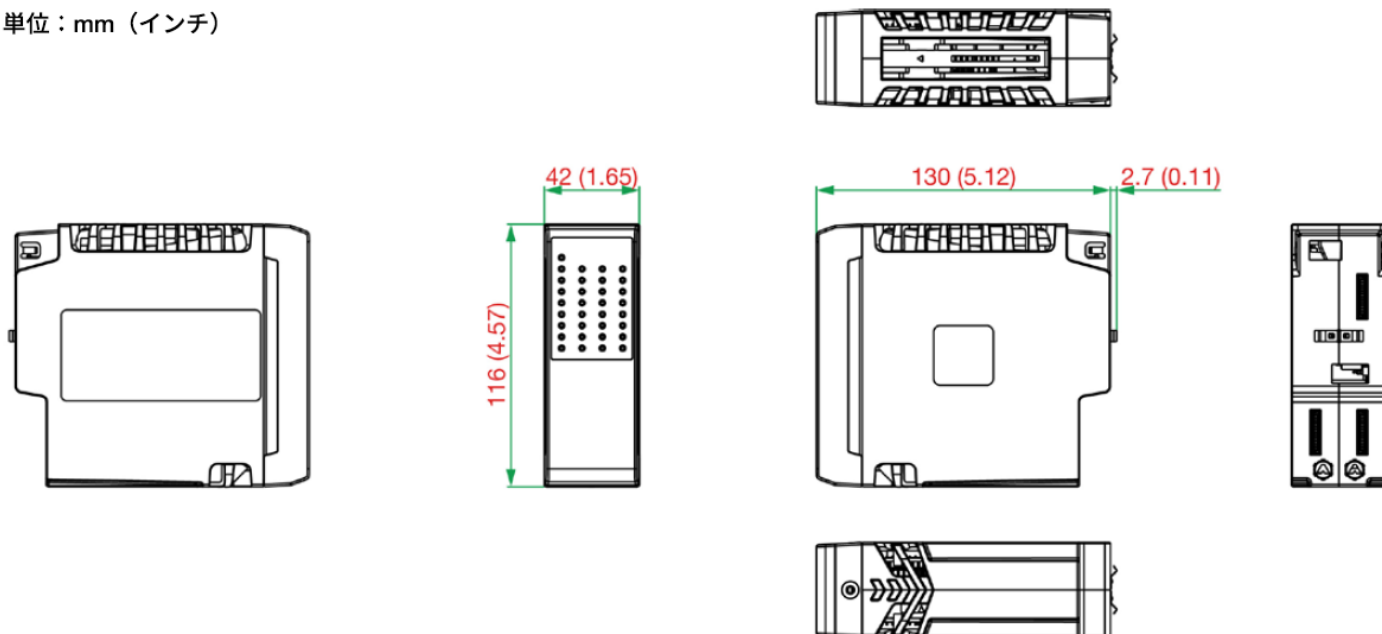

65M-TBモデル

単位：mm（インチ）

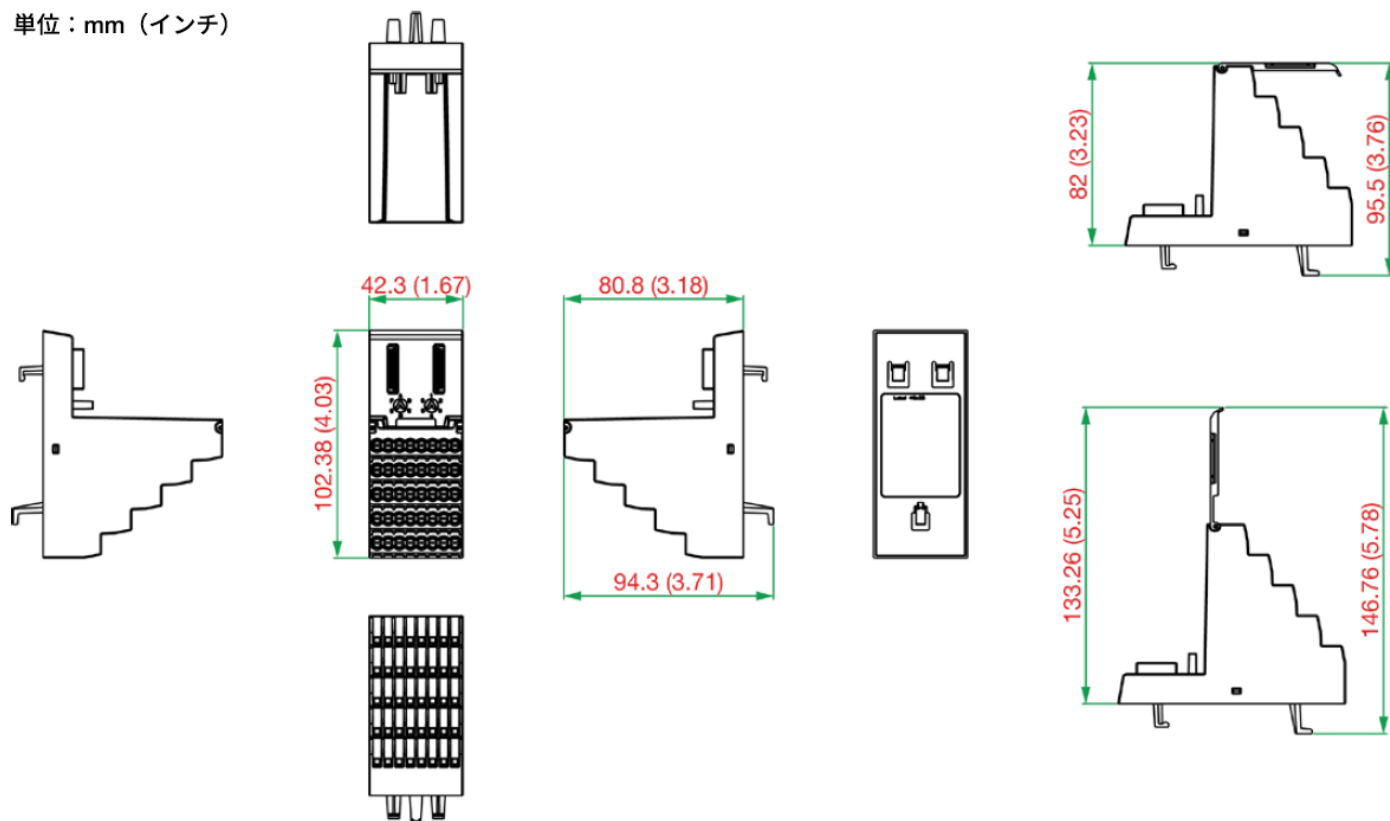

注文情報

Model Name	No. of I/O Interfaces	Digital Inputs/Outputs	Analog Inputs/Outputs	HART	Operating Temperature
65M-1900-CT-T	DIs x 32	24 VDC	–	–	-40 to 75°C
65M-2901-CT-T	DOs x 32	24 VDC	–	–	-40 to 75°C

Model Name	No. of I/O Interfaces	Digital Inputs/Outputs	Analog Inputs/Outputs	HART	Operating Temperature
65M-3600-CT-T	Als x 16	–	0 to 20 mA 4 to 20 mA	–	-40 to 75°C
65M-3610-CT-T	Als x 16	–	0 to 10 V 1 to 5 V	–	-40 to 75°C
65M-4820-CT-T	AOs x 8	–	0 to 10 V 1 to 5 V 0 to 20 mA 4 to 20 mA	–	-40 to 75°C
65M-3800H-CT-T	Als x 8 (HART)	–	4 to 20 mA	enable disable (default)	-40 to 75°C
65M-5801-CT-T	Serial Ports x 8	–	–	–	-40 to 75°C

アクセサリ（別売）

Terminal Blocks

65M-TB-1900-CT-T	ioPAC 6500 terminal-block module for 65M-1900, -40 to 75°C operating temperature, conformal coating Applicable Models: 65M-1900-CT-T
65M-TB-2901-CT-T	ioPAC 6500 terminal-block module for 65M-2901, -40 to 75°C operating temperature, conformal coating Applicable Models: 65M-2901-CT-T
65M-TB-3600-CT-T	ioPAC 6500 terminal-block module for 65M-3600, -40 to 75°C operating temperature, conformal coating Applicable Models: 65M-3600-CT-T
65M-TB-3610-CT-T	ioPAC 6500 terminal-block module for 65M-3610, -40 to 75°C operating temperature, conformal coating Applicable Models: 65M-3610-CT-T
65M-TB-3800H-CT-T	ioPAC 6500 terminal-block module for 65M-3800H, -40 to 75°C operating temperature, conformal coating Applicable Models: 65M-3800H-CT-T
65M-TB-4820-CT-T	ioPAC 6500 terminal-block module for 65M-4820, -40 to 75°C operating temperature, conformal coating Applicable Models: 65M-4820-CT-T
65M-TB-5801-CT-T	ioPAC 6500 terminal-block module for 65M-5801, -40 to 75°C operating temperature, conformal coating Applicable Models: 65M-5801-CT-T

© Moxa Inc. All rights reserved. 2025年9月22日更新。

Moxa Inc.の明白な許可を written で取得しない限り、本書およびその一部の複製や使用はいかなる方法やいかなる場合でも許可されません。製品の仕様は予告なく変更されることがあります。最新の製品情報については当社のWebサイトをご覧ください。