

INJ-24A Series

Gigabit high power IEEE 802.3af/at PoE+ injectors



Features and Benefits

- High-power mode provides up to 60 W
- DIP switch configurator and LED indicator for PoE management
- 3 kV surge resistance for harsh environments
- Mode A and Mode B selectable for flexible installation
- Built-in 24/48 VDC booster for redundant dual power inputs
- -40 to 75°C operating temperature range (-T model)

Certifications



Introduction

The INJ-24A is a Gigabit high-power PoE+ injector that combines power and data and delivers them to a powered device over one Ethernet cable. Designed for power-hungry devices, the INJ-24A injector provides up to 60 watts, which is twice as much power as conventional PoE+ injectors. The injector also includes features such as a DIP switch configurator and LED indicator for PoE management, and it can also support 24/48 VDC power inputs for power redundancy and operational flexibility. The -40 to 75°C (-40 to 167°F) operating temperature capability makes the INJ-24A ideally suited to operating in harsh industrial environments.

Specifications

Ethernet Interface

10/100/1000BaseT(X) Ports (RJ45 connector)	1 Full/Half duplex mode Auto MDI/MDI-X connection Auto negotiation speed
PoE Ports (10/100/1000BaseT(X), RJ45 connector)	1 Full/Half duplex mode Auto MDI/MDI-X connection Auto negotiation speed
PoE Pinout	Default: V+, V+, V-, V- for pins 4, 5, 7, 8 (Midspan, MDI, Mode B) Custom DIP switch setting: V+, V+, V-, V- for pins 1, 2, 3, 6 (Endspan, MDI, Mode A)
Standards	IEEE 802.3 for 10BaseT IEEE 802.3ab for 1000BaseT(X) IEEE 802.3af/at for PoE/PoE+ output IEEE 802.3u for 100BaseT(X)


Power Parameters

Input Voltage	24/48 VDC
Operating Voltage	22 to 57 VDC
Input Current	2.71 A @ 24 VDC
Power Consumption (Max.)	Max. 5.29 W full loading without PDs' consumption
Power Budget	Max. 60 W for total PD consumption Max. 60 W for each PoE port

Connection	1 removable 4-contact terminal block(s)
Overload Current Protection	Supported
Reverse Polarity Protection	Supported
Physical Characteristics	
Housing	Metal
IP Rating	IP30
Dimensions	30 x 115 x 78.8 mm (1.19 x 4.53 x 3.10 in)
Weight	245 g (0.54 lb)
Installation	DIN-rail mounting Wall mounting (with optional kit)
Environmental Limits	
Operating Temperature	INJ-24A: 0 to 60°C (32 to 140°F) INJ-24A-T: -40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Standards and Certifications	
Safety	UL 508 EN 62368-1
EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 3 kV; Signal: 3 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Freefall	IEC 60068-2-31
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6
MTBF	
Time	2,407,739 hrs
Standards	Telcordia (Bellcore), GB
Warranty	
Warranty Period	5 years
Details	See www.moxa.com/warranty
Package Contents	
Device	1 x INJ-24A Series PoE+ injector
Documentation	1 x quick installation guide 1 x product certificates of quality inspection, Simplified Chinese 1 x product notice, Simplified Chinese 1 x warranty card

Dimensions

Unit: mm (inch)

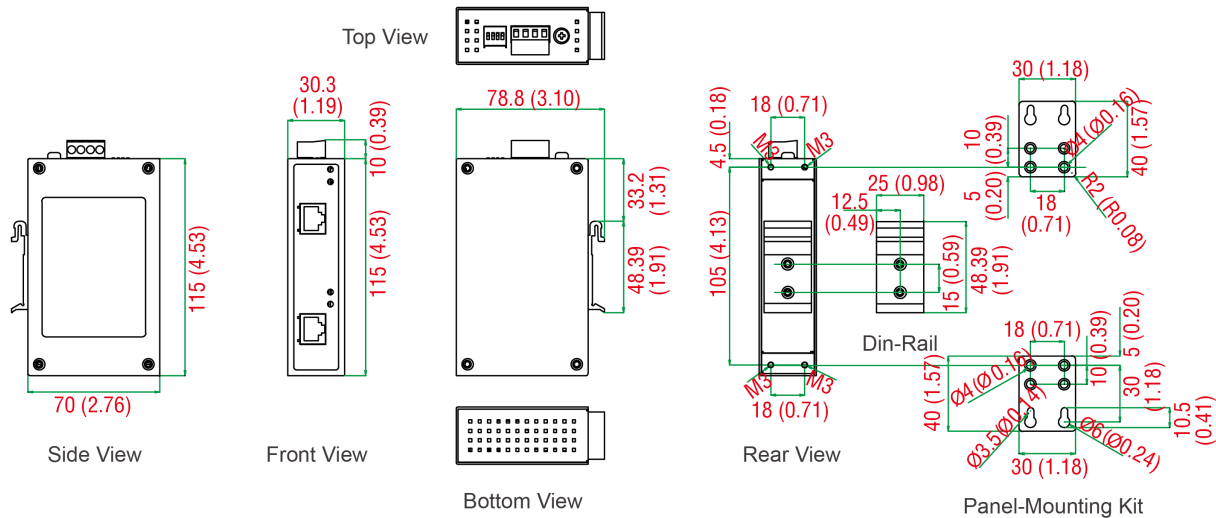

Ordering Information

Model Name	10/100/1000BaseT(X) Ports10RJ45 Connector	PoE Ports, 10/100/1000BaseT(X)10RJ45 Connector	Operating Temp.
INJ-24A	1	1	0 to 60°C
INJ-24A-T	1	1	-40 to 75°C

Accessories (sold separately)

Power Supplies

MDR-40-24	DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
MDR-60-24	DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature

Wall-Mounting Kits

WK-30	Wall-mounting kit, 2 plates, 4 screws, 30 x 66.8 x 2 mm
-------	---

Rack-Mounting Kits

RK-4U	19-inch rack-mounting kit
-------	---------------------------

© Moxa Inc. All rights reserved. Updated Apr 22, 2024.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.