

NPort Expressシリーズ

1ポートエントリーレベルRS-232/422/485シリアルデバイスサーバー



機能と特長

- 3-in-1シリアルポート：RS-232、RS-422、またはRS-485
- さまざまな動作モード（TCPサーバー、TCPクライアント、UDP、イーサネットモデム、ペア接続など）
- WindowsおよびLinux用のReal COM/TTYドライバー
- 2ワイヤ式RS-485（自動データ方向制御（ADDC）を装備）

認証



製品紹介

NPort® DE-211およびDE-311は、RS-232、RS-422、および2線式RS-485をサポートする1ポートシリアルデバイスサーバーです。DE-211は10 Mbpsイーサネット接続をサポートし、シリアルポート用のDB25メスコネクタを備えています。DE-311は10/100 Mbpsイーサネット接続をサポートし、シリアルポート用のDB9メスコネクタを備えています。どちらのデバイスサーバーも、情報表示ボード、PLC、フローメーター、ガスメーター、CNCマシン、生体認証カードリーダーを含むアプリケーションに最適です。

仕様

Ethernet Interface

No. of Ports	1
Magnetic Isolation Protection	1.5 kV (built-in)
10/100BaseT(X) Ports (RJ45 connector)	DE-311: Auto MDI/MDI-X connection
10BaseT(X) Ports, RJ45 Connector	DE-211: Auto MDI/MDI-X connection

Ethernet Software Features

Configuration Options	Windows Utility, Telnet Console, Serial Console
Management	ARP, BOOTP, DHCP Client, IPv4, TCP/IP, Telnet, UDP, ICMP
Linux Real TTY Drivers	Kernel versions: 2.4.x, 2.6.x, 3.x, 4.x, and 5.x
Fixed TTY Drivers	SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X
Android API	Android 3.1.x and later
Windows Real COM Drivers	Windows 95/98/ME/NT/2000, Windows XP/2003/Vista/2008/7/8/8.1/10/11 (x86/x64), Windows 2008 R2/2012/2012 R2/2016/2019 (x64), Windows Server 2022, Windows Embedded CE 5.0/6.0, Windows XP Embedded

Serial Interface

Connector	DE-211: DB25 female DE-311: DB9 female
Serial Standards	RS-232, RS-422, RS-485

No. of Ports	1
Baudrate	Supports standard baudrates (unit=bps): 50, 75, 110, 134, 150, 300, 600, 1200, 1800, 2400, 4800, 7200, 9600, 19200, 38400, 57600, 115200, 230.4k
Data Bits	5, 6, 7, 8
Stop Bits	1, 1.5, 2
Parity	None, Even, Odd, Space, Mark
Flow Control	None, RTS/CTS, XON/XOFF
RS-485 Data Direction Control	ADDC (automatic data direction control)

Serial Signals

RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, RTS+, RTS-, CTS+, CTS-, GND
RS-485-2w	Data+, Data-, GND

Power Parameters

Input Current	DE-211: 180 mA @ 12 VDC, 100 mA @ 24 VDC DE-311: 300 mA @ 9 VDC, 150 mA @ 24 VDC
Input Voltage	DE-211: 12 to 30 VDC DE-311: 9 to 30 VDC

Reliability

Alert Tools	Built-in buzzer and RTC (real-time clock)
-------------	---

Physical Characteristics

Housing	Metal
Dimensions (with ears)	90.2 x 100.4 x 22 mm (3.55 x 3.95 x 0.87 in)
Dimensions (without ears)	67 x 100.4 x 22 mm (2.64 x 3.95 x 0.87 in)
Weight	480 g (1.06 lb)

Environmental Limits

Operating Temperature	0 to 55°C (32 to 131°F)
Storage Temperature (package included)	-40 to 75°C (-40 to 167°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications


EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class B
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 1 kV IEC 61000-4-5 Surge: Power: 1 kV; Signal: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-11

Safety	UL 60950-1
Medical	DE-311: EN 55011: 2007+A2: 2007 Class A (Group 1) compliant DE-311: EN 60601-1-2: 2007 compliant
Declaration	
Green Product	RoHS, CRoHS, WEEE
MTBF	
Time	DE-211: 347,822 hrs DE-311: 225,529 hrs
Standards	MIL-HDBK-217F
Warranty	
Warranty Period	5 years
Details	See www.moxa.com/jp/warranty
Package Contents	
Device	1 x NPort Express Series device server
Power Supply	1 x power adapter, universal
Documentation	1 x quick installation guide 1 x warranty card

寸法


NPort DE-311

単位: mm (インチ)

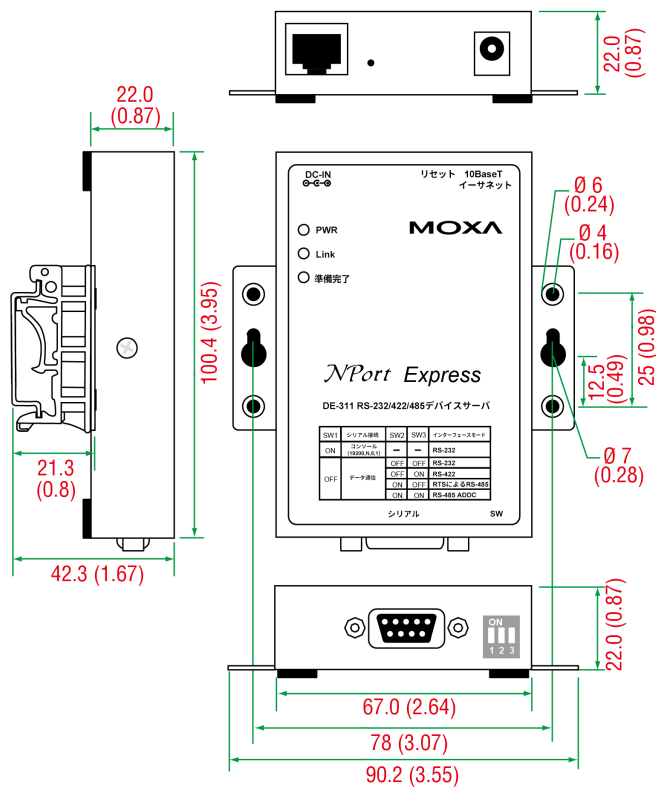

NPort DE-211

単位: mm (インチ)

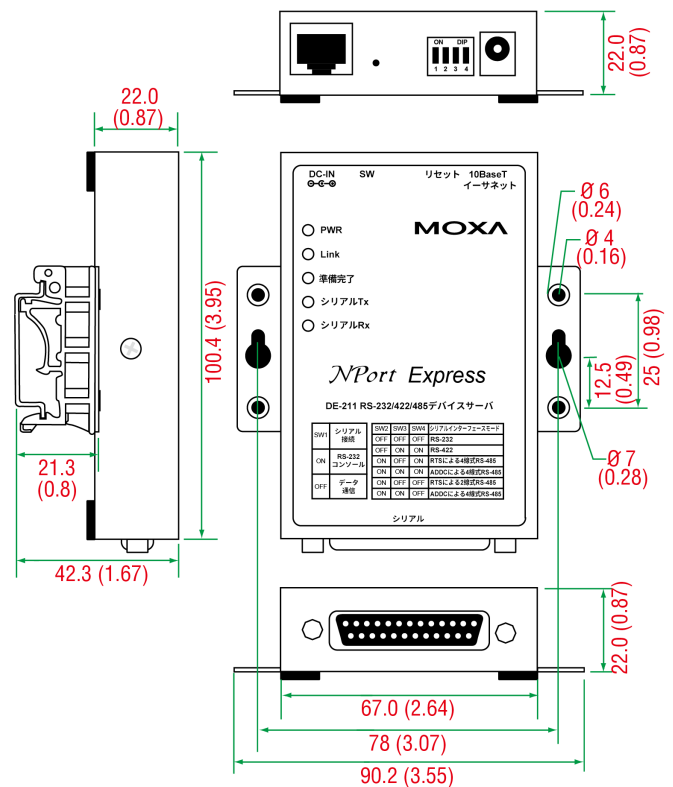

注文情報

Model Name	Ethernet Port Speed	Serial Connector	Power Input	Medical Certifications
DE-211	10 Mbps	DB25 female	12 to 30 VDC	-
DE-311	10/100 Mbps	DB9 female	9 to 30 VDC	EN 60601-1-2 Class B, EN 55011

アクセサリ（別売）

DIN-Rail Mounting Kits

DK35A	DIN-rail mounting kit, 35 mm
-------	------------------------------

Power Adapters

PWR-12050-EU-S2	Unlocking barrel plug, 12 VDC, 0.5 A, 100 to 240 VAC, EU plug, 0 to 40°C operating temperature
PWR-12050-UK-S2	Unlocking barrel plug, 12 VDC, 0.5 A, 100 to 240 VAC, UK plug, 0 to 40°C operating temperature
PWR-12050-CN-S2	Unlocking barrel plug, 12 VDC, 0.5 A, 100 to 240 VAC, CN plug, 0 to 40°C operating temperature
PWR-12050-AU-S2	Unlocking barrel plug, 12 VDC, 0.5 A, 100 to 240 VAC, AU plug, 0 to 40°C operating temperature
PWR-12050-USJP-S2	Unlocking barrel plug, 12 VDC, 0.5 A, 100 to 240 VAC, US/JP plug, 0 to 40°C operating temperature

Terminal Blocks

TB-M25	DB25 male DIN-rail wiring terminal Applicable Models: DE-211
TB-M9	DB9 male DIN-rail wiring terminal Applicable Models: DE-311

Cables

NP21103	DB25 male to terminal block for RS-422/485 transmission Applicable Models: DE-211
NP21102	DB25 male to DB9 male cable for RS-232 transmission, 30 cm Applicable Models: DE-211
CBL-F9M9-150	DB9 female to DB9 male serial cable, 1.5 m Applicable Models: DE-311
CBL-F9M9-20	DB9 female to DB9 male serial cable, 20 cm Applicable Models: DE-311
NP21101	DB25 male to DB9 female cable for RS-232 transmission, 30 cm Applicable Models: DE-211

© Moxa Inc. All rights reserved. 2022年4月22日更新。

Moxa Inc.の明白な許可を written で取得しない限り、本書およびその一部の複製や使用はいかなる方法やいかなる場合でも許可されません。製品の仕様は予告なく変更されることがあります。最新の製品情報については当社のWebサイトをご覧ください。